

# M-Series

## CIRCUIT BREAKER

The M-Series is a low cost, miniature, hydraulic-magnetic circuit breaker which features a compact, space saving design, front panel snap-in mounting and a vertically mounted parallel pole configuration. It features various styling options to maximize your design flexibility. Choices include rocker, illuminated rocker, paddle and baton style handle actuators, push-to-reset and push-pull pushbutton actuators, as well as Visi-Rocker two color actuators. Our exclusive Rockerguard bezel helps prevent inadvertent actuation and a wiping contact mechanism assures long-term reliability.

The M-Series circuit breakers are available with 1, 2 or parallel poles, 0.02 to 50 amp ratings, and 125 and 250VAC or 80VDC versions. With over 16 different time delays, 5 terminal styles, a variety of panel hardware, various colors, and legend imprinting, it assures suitability for most any application design.



### Product Highlights:

- Parallel pole configuration fits in one rack unit
- MIL-PRF-55629
- MIL STD 202 compliant
- MIL-PRF-39019F ingress protection
- Sealed toggle actuator
- Compact design



### Resources:

[Configure a Complete Part](#)

[\*\*Download CAD & Sales Drawing >\*\*](#)

### Typical Applications:

- Telecom/Datacom
- Transportation
- Marine
- Generators
- Power Supplies
- Medical Equipment




**Carling Technologies®**  
Innovative Designs. Powerful Solutions.

**Carling Technologies, Inc.**  
60 Johnson Avenue, Plainville, CT 06062  
Email: [sales@carlingtech.com](mailto:sales@carlingtech.com)  
Application Support: [team2@carlingtech.com](mailto:team2@carlingtech.com)  
Phone: 860.793.9281 Fax: 860.793.9231

[www.carlingtech.com](http://www.carlingtech.com)



## Electrical

|                         |                                                                                                                                                                                                                                                                                                         |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum Voltage         | 125/250 VAC 50/60 Hz, 80 VDC<br>(See Rating Tables.)                                                                                                                                                                                                                                                    |
| Current Ratings         | Standard current coils: 0.100, 0.250, 0.500, 0.750, 1.00 thru 15.0 in 1 amp increments, 18.0, 20.0, 25.0, 30.0. Other ratings available - see Ordering Scheme.                                                                                                                                          |
| Auxiliary Switch Rating | SPDT; 7A 250VAC, 7A (Res) 28VDC, 4A (Ind.) 28VDC, 0.25A 80VDC (Res) (silver contacts), 0.1A 125VAC (gold contacts).                                                                                                                                                                                     |
| Insulation Resistance   | Minimum of 100 Megohms at 500 VDC.                                                                                                                                                                                                                                                                      |
| Dielectric Strength     | UL, CSA 1500V, 50/60 Hz for one minute between all electrically isolated terminals. M-Series Circuit Breakers comply with the 8mm spacing and 3750 V 50/60Hz dielectric requirements from hazardous voltage to operator accessible surfaces, per Publications IEC 380, 435, 950, EN 60950 and VDE 0805. |
| Resistance, Impedance   | Values from Line to Load Terminal - based on Series Trip Circuit Breaker.                                                                                                                                                                                                                               |

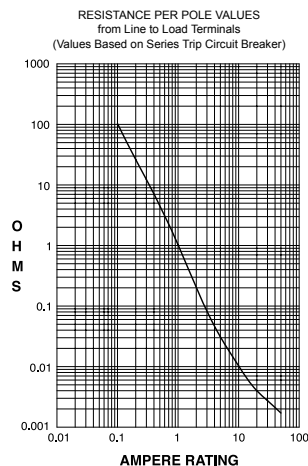

| CURRENT<br>(AMPS) | TOLERANCE<br>(%) |
|-------------------|------------------|
| 0.10 - 20.0       | ± 25             |
| 20.1 - 50.0       | ± 35             |

## Pulse Tolerance Curves



## Mechanical

|                 |                                                                                                              |
|-----------------|--------------------------------------------------------------------------------------------------------------|
| Endurance       | 10,000 ON-OFF operations @ 6 per minute with rated Current and Voltage.                                      |
| Trip Free       | All M-Series Circuit Breakers will trip on overload, even when actuator is forcibly held in the ON position. |
| Trip Indication | The actuator moves positively to the OFF position when an overload causes the circuit breaker to trip.       |

## Physical

|                           |                                                                                           |
|---------------------------|-------------------------------------------------------------------------------------------|
| Number of Poles           | 1 or 2                                                                                    |
| Internal Circuit Configs. | Series with or without Auxiliary Switch.<br>Switch Only with or without Auxiliary Switch. |
| Weight                    | Approximately 30 grams/pole (Approximately 1.07 ounces/pole)                              |
| Standard Colors           | See Ordering Scheme                                                                       |

## Environmental

Designed in accordance with requirements of specification MIL PRF-55629 & MIL-STD-202G as follows:

|                       |                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Shock                 | Withstands 100 Gs, 6ms, sawtooth while carrying rated current per Method 213, Cond. I. Instantaneous curves tested at 80% of rated current.                                                                                                                                                                                                          |
| Vibration             | Withstands 0.060" excursion from 10-55 Hz, and 10 Gs 55-500 Hz, at rated current per Method 204C, Test Condition A. Instantaneous curves tested at 80% of rated current.                                                                                                                                                                             |
| Moisture Resistance   | Method 106D, i.e., ten 24-hour cycles @ + 25°C to +65°C, 80-98% RH.                                                                                                                                                                                                                                                                                  |
| Salt Spray            | Method 101, Condition A (90-95% RH @ 5% NaCl Solution, 96 hrs).                                                                                                                                                                                                                                                                                      |
| Thermal Shock         | Method 107D, Condition A (Five cycles @ -55°C to +25°C to +85°C to +25°C).                                                                                                                                                                                                                                                                           |
| Operating Temperature | -40° C to +85° C                                                                                                                                                                                                                                                                                                                                     |
| Chemical Resistance   | Only the outside surfaces of the case and the handles may be cleaned with detergents or alcohol. Organic (hydrocarbon based) solvents are not recommended because they attack plastics. Caution should be taken when solvents are used to clean and remove flux from terminals. Lubricants should not be introduced into the handle/bushing openings |

\*Manufacturer reserves the right to change product specification without prior notice.

## Electrical Tables

**Table A:** Lists UL Recognized and CSA Accepted configurations & performance capabilities as a Component Supplementary Protector.

| M-SERIES TABLE A: COMPONENT SUPPLEMENTARY PROTECTORS |                   |           |       |                |                      |                |                               |                     |                   |                 |
|------------------------------------------------------|-------------------|-----------|-------|----------------|----------------------|----------------|-------------------------------|---------------------|-------------------|-----------------|
| Circuit Configuration                                | Voltage           |           |       | Current Rating |                      | Poles Breaking | Short Circuit Capacity (Amps) |                     | Application Codes |                 |
|                                                      | Max Rating        | Frequency | Phase | Full Load Amps | General Purpose Amps |                | UL / CSA                      |                     |                   |                 |
|                                                      |                   |           |       |                |                      |                | With Backup Fuse              | Without Backup Fuse | UL                | CSA             |
| Series                                               | 32                | DC        | ---   | 0.02 - 15      | ---                  | 1              | ---                           | 1000                | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                   |           |       | ---            | 15.1 - 25            | 1              | ---                           | 1000                | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      | 50 <sup>2</sup>   | DC        | ---   | 0.02 - 7.5     | ---                  | 1              | ---                           | 1000                | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      | 65                | DC        | ---   | 0.02 - 15      | ---                  | 2              | ---                           | 1000                | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                   |           |       | ---            | 15.1 - 25            | 2              | ---                           | 1000                | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      | 65 <sup>1,2</sup> | DC        | ---   | 0.02 - 15      | ---                  | 1              | ---                           | 1000                | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                   |           |       | ---            | 15.1 - 30            | 1              | ---                           | 1000                | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      | 65                | DC        | ---   | 0.02 - 15      | ---                  | 2              | 5000 <sup>3</sup>             | ---                 | TC1, 2, OL1, C1   | TC1, 2, OL1, C1 |
|                                                      |                   |           |       | ---            | 15.1 - 25            | 2              | 5000 <sup>3</sup>             | ---                 | TC1, 2, OL0, C1   | TC1, 2, OL0, C1 |
|                                                      | 80 <sup>1</sup>   | DC        | ---   | 0.02 - 15      | ---                  | 1              | ---                           | 600                 | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                   |           |       | ---            | 15.1 - 30            | 1              | ---                           | 600                 | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      | 125               | 50 / 60   | 1     | 0.02 - 15      | ---                  | 1              | ---                           | 1000                | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                   |           |       | ---            | 15.1 - 30            | 1              | ---                           | 1000                | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      |                   |           |       | 1 - 30         | ---                  | 1              | ---                           | 360                 | TC1, OL1, U2      | TC3, OL1, U3    |
|                                                      | 250 <sup>2</sup>  | 50 / 60   | 1     | 0.02 - 12      | ---                  | 1              | ---                           | 1000                | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      | 250               | 50 / 60   | 1     | ---            | 12.1 - 18            | 1              | 1000 <sup>4</sup>             | ---                 | TC1, 2, OL0, C1   | TC1, 2, OL0, C1 |
|                                                      | 250               | 50 / 60   | 1     | 0.02 - 15      | ---                  | 2              | ---                           | 1000                | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                   |           |       | ---            | 15.1 - 30            | 2              | ---                           | 1000                | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      |                   |           |       | 1 - 30         | ---                  | 2              | ---                           | 360                 | TC1, OL1, U2      | TC3, OL1, U3    |

**Notes:**

- 1 Polarity Sensitive
- 2 Available only with Special Catalog Number. Consult Factory.
- 3 Requires Branch Circuit Backup with a UL Listed type K-5 or RK-5 fuse rated 30 Amps maximum
- 4 Requires Branch Circuit Backup with a UL Listed type K-5 or RK-5 fuse rated 60 Amps maximum

**Table B:** Lists UL Recognized, CSA Accepted and TUV and VDE Certified configurations and performance capabilities as a Component Supplementary Protector.

| M-SERIES TABLE B: COMPONENT SUPPLEMENTARY PROTECTORS |                 |           |       |                |                      |                |                               |                     |                  |                     |                   |                 |
|------------------------------------------------------|-----------------|-----------|-------|----------------|----------------------|----------------|-------------------------------|---------------------|------------------|---------------------|-------------------|-----------------|
| Circuit Configuration                                | Voltage         |           |       | Current Rating |                      | Poles Breaking | Short Circuit Capacity (Amps) |                     |                  |                     | Application Codes |                 |
|                                                      | Max Rating      | Frequency | Phase | Full Load Amps | General Purpose Amps |                | UL / CSA                      |                     | VDE / TUV        |                     |                   |                 |
|                                                      |                 |           |       |                |                      |                | With Backup Fuse              | Without Backup Fuse | With Backup Fuse | Without Backup Fuse | UL                | CSA             |
| Series                                               | 32              | DC        | ---   | 0.02 - 15      | ---                  | 1              | ---                           | 1000                | 3000             | 500                 | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                 |           |       | ---            | 15.1 - 25            | 1              | ---                           | 1000                | 3000             | 500                 | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      | 50 <sup>2</sup> | DC        | ---   | 0.02 - 7.5     | ---                  | 1              | ---                           | 1000                | 3000             | 500                 | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      | 65              | DC        | ---   | 0.02 - 15      | ---                  | 2              | ---                           | 1000                | 3000             | 500                 | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                 |           |       | ---            | 15.1 - 25            | 2              | ---                           | 1000                | 3000             | 500                 | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      | 65 <sup>3</sup> | DC        | ---   | 0.02 - 15      | ---                  | 2              | 5000                          | ---                 | 3000             | 500                 | TC1, 2, OL1, C1   | TC1, 2, OL1, C1 |
|                                                      |                 |           |       | ---            | 15.1 - 30            | 2              | 5000                          | ---                 | 3000             | 500                 | TC1, 2, OL0, C1   | TC1, 2, OL0, C1 |
|                                                      | 80 <sup>1</sup> | DC        | ---   | 0.02 - 15      | ---                  | 1              | ---                           | 600 <sup>4</sup>    | ---              | 500                 | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                 |           |       | ---            | 15.1 - 30            | 1              | ---                           | 600 <sup>4</sup>    | ---              | 500                 | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      | 125             | 50 / 60   | 1     | 0.02 - 15      | ---                  | 1              | ---                           | 1000                | 3000             | 500                 | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                 |           |       | 1 - 15         | ---                  | 1              | ---                           | 360                 | 3000             | 500                 | TC1, OL1, U2      | TC3, OL1, U3    |
|                                                      | 250             | 50 / 60   | 1     | 0.02 - 12      | ---                  | 1              | ---                           | 1000                | 3000             | 500                 | TC1, 2, OL1, U1   | TC1, 2, OL1, U1 |
|                                                      |                 |           |       | 0.02 - 20      | ---                  | 2              | ---                           | 1000                | 3000             | 500                 | TC1, 2, OL0, U1   | TC1, 2, OL0, U1 |
|                                                      |                 |           |       | 1 - 12         | ---                  | 1              | ---                           | 360                 | 3000             | 500                 | TC1, OL1, U2      | TC3, OL1, U3    |

**Notes:**

- 1 Polarity Sensitive
- 2 Available only with Special Catalog Number. Consult Factory.
- 3 Requires Branch Circuit Backup with a UL Listed type K-5 or RK-5 fuse rated 30 Amps maximum
- 4 TUV only, not VDE
- 5 Requires backup protection with a thermal magnetic circuit breaker rated 32 amps and having a Type C trip characteristic per EN60898/DIN VDE 0641 (C32A) for ratings greater than 15amps, and a thermal magnetic circuit breaker rated 16 amps and having a Type C trip characteristic per EN60898/DIN VDE 0641 (C16A) for ratings 15 amps and less

## Electrical Tables

**Table C:** Lists UL489A Listed and TUV Certified configurations and performance capabilities for use in Communications Equipment.

| M-SERIES TABLE C: UL489A Listed<br>(Communications Equipment - Polarity Sensitive) |                 |           |                                           |                   |                              |     |
|------------------------------------------------------------------------------------|-----------------|-----------|-------------------------------------------|-------------------|------------------------------|-----|
| Circuit Configuration                                                              | Voltage         |           | Current Rating<br>General Purpose<br>Amps | Poles<br>Breaking | Interrupting Capacity (Amps) |     |
|                                                                                    | Max<br>Rating   | Frequency |                                           |                   | Without Backup Fuse          |     |
|                                                                                    |                 |           |                                           |                   | UL489A                       | TUV |
| Series                                                                             | 80              | DC        | 0.02 - 30                                 | 1                 | 600                          | --- |
|                                                                                    | 65 <sup>1</sup> | DC        | 0.02 - 30                                 | 1                 | 1000                         | --- |
|                                                                                    | 80              | DC        | 0.10 - 30                                 | 1                 | 600                          | 600 |

Notes:

1. Available only with Special Catalog Number

**Table D:** Lists UL489A Listed configurations and performance capabilities for use in Communications Equipment.

| M-SERIES TABLE D: Parallel Pole Construction UL489A Listed<br>(Communications Equipment - Polarity Sensitive) |                 |           |                                           |                   |                              |
|---------------------------------------------------------------------------------------------------------------|-----------------|-----------|-------------------------------------------|-------------------|------------------------------|
| Circuit Configuration                                                                                         | Voltage         |           | Current Rating<br>General Purpose<br>Amps | Poles<br>Breaking | Interrupting Capacity (Amps) |
|                                                                                                               | Max<br>Rating   | Frequency |                                           |                   | Without Backup Fuse          |
|                                                                                                               |                 |           |                                           |                   | UL489A                       |
| Series                                                                                                        | 80              | DC        | 31 - 50                                   | 2                 | 600                          |
|                                                                                                               | 65 <sup>1</sup> | DC        | 31 - 50                                   | 2                 | 1000                         |

Notes:

1. Available only with Special Catalog Number

## Agency Certifications

### UL Recognized

UL Standard 1077



Component Recognition Program  
as Protectors, Supplementary  
(Guide CCN/QVNU2, File E75596)

### CSA Accepted



Component Supplementary  
Protector (Class 3215 30, File  
047848 0 000)  
CSA Standard C22.2 No. 235

### UL Listed

UL Standard 489A



Communications Equipment  
(Guide CCN/DITT, File E189195)

### VDE Certified



EN60934, VDE 0642 under File  
10537

### TUV Certified



EN60934, under License No.  
R9671109

|             |               |            |          |              |          |                           |          |                        |          |               |          |                   |                                    |              |          |                      |          |                          |
|-------------|---------------|------------|----------|--------------|----------|---------------------------|----------|------------------------|----------|---------------|----------|-------------------|------------------------------------|--------------|----------|----------------------|----------|--------------------------|
| <b>M</b>    | <b>E</b>      | <b>2</b>   | <b>-</b> | <b>P</b>     | <b>-</b> | <b>D2</b>                 | <b>-</b> | <b>650</b>             | <b>-</b> | <b>5</b>      | <b>-</b> | <b>A</b>          | <b>1</b>                           | <b>2</b>     | <b>-</b> | <b>B</b>             | <b>-</b> | <b>T</b>                 |
| 1<br>Series | 2<br>Actuator | 3<br>Poles |          | 4<br>Circuit |          | 5<br>Frequency<br>& Delay |          | 6<br>Current<br>Rating |          | 7<br>Terminal |          | 8<br>Illumination | 9<br>Actuator<br>Color &<br>Legend | 10<br>Legend |          | 11<br>Bezel<br>Color |          | 12<br>Agency<br>Approval |

### 1 SERIES

**M**

### 2 ACTUATOR

#### Single Color

**A** Angled  
**B** Flat

#### Two Color Visi

**D** Indicate ON  
**E** Indicate OFF

#### Single Color Translucent

**F** Angled  
**G** Flat

| STYLE      | INDICATE - "ON"<br>(CODE-D) | INDICATE - "OFF"<br>(CODE-E) | FLAT<br>(CODES-B & G) | ANGLED<br>(CODES-A & F) |
|------------|-----------------------------|------------------------------|-----------------------|-------------------------|
| VERTICAL   |                             |                              |                       |                         |
| HORIZONTAL |                             |                              |                       |                         |

### 3 POLES

**2** Two

### 4 CIRCUIT/AUXILIARY SWITCH <sup>2</sup>

**P** Series Trip Current (Parallel Pole)

**with Auxiliary Switch, Silver Contacts**

**Q** Series Trip Current (Parallel Pole) .110 x 0.20 Q.C

**with Auxiliary Switch, Gold Contacts**

**R** Series Trip Current (Parallel Pole) .110 x 0.20 Q.C

### 5 FREQUENCY & TIME DELAY

**D2** DC Short

**D4** DC Medium

### 6 CURRENT RATING (AMPERES)

| CODE       | AMPERES |
|------------|---------|
| <b>631</b> | 31.000  |
| <b>635</b> | 35.000  |
| <b>640</b> | 40.000  |
| <b>645</b> | 45.000  |
| <b>650</b> | 50.000  |

Notes:

1 Reminder of Rocker same color as Visi

2 Aux Switch only available with screw terminals

### 7 TERMINAL

**A** Push in Stud

**5** 10-32 Screw (Bus Type)

### 8 ILLUMINATION

**Non-Illuminated**

**A** Non-Illuminated

### 9 ACTUATOR COLOR & LEGEND

|   | Actuator Visi <sup>1</sup> | Legend |
|---|----------------------------|--------|
| 1 | White                      | Black  |
| 2 | Black                      | White  |
| 3 | Red                        | White  |
| 4 | Green                      | White  |
| 5 | Blue                       | White  |
| 6 | Yellow                     | Black  |
| 7 | Gray                       | Black  |
| 8 | Orange                     | Black  |

### 10 LEGEND

**2** ON - OFF Vertical  
**3** ON - OFF Horizontal  
**6** Dual Vertical  
**7** Dual Horizontal

### 11 BEZEL COLOR

**A** White without Rockerguard  
**B** Black without Rockerguard  
**G** Gray without Rockerguard  
**1** White with Rockerguard  
**2** Black with Rockerguard  
**7** Gray with Rockerguard

### 12 AGENCY APPROVAL

**T** UL 489A Listed

|             |               |            |          |              |          |                           |          |                        |          |               |          |                        |                                 |                                   |          |                         |          |                          |
|-------------|---------------|------------|----------|--------------|----------|---------------------------|----------|------------------------|----------|---------------|----------|------------------------|---------------------------------|-----------------------------------|----------|-------------------------|----------|--------------------------|
| <b>M</b>    | <b>M</b>      | <b>2</b>   | <b>-</b> | <b>P</b>     | <b>-</b> | <b>D2</b>                 | <b>-</b> | <b>650</b>             | <b>-</b> | <b>5</b>      | <b>-</b> | <b>1</b>               | <b>B</b>                        | <b>B</b>                          | <b>-</b> | <b>B</b>                | <b>-</b> | <b>T</b>                 |
| 1<br>Series | 2<br>Actuator | 3<br>Poles |          | 4<br>Circuit |          | 5<br>Frequency<br>& Delay |          | 6<br>Current<br>Rating |          | 7<br>Terminal |          | 8<br>Actuator<br>Color | 9<br>Front<br>Panel<br>Hardware | 10<br>Legend<br>Plate/<br>Marking |          | 11<br>Brushing<br>Color |          | 12<br>Agency<br>Approval |

**1 SERIES****M****2 ACTUATOR**

**M** Paddle  
**T** Push-Pull

**3 POLES****2** Two**4 CIRCUIT/AUXILIARY SWITCH <sup>1</sup>**

**P** Series Trip Current (Parallel Pole)  
**with Auxiliary Switch, Silver Contacts**  
**Q** Series Trip Current (Parallel Pole) .110 x 0.20 Q.C  
**with Auxiliary Switch, Gold Contacts**  
**R** Series Trip Current (Parallel Pole) .110 x 0.20 Q.C

**5 FREQUENCY & TIME DELAY**

**D2** DC Short  
**D4** DC Medium

**6 CURRENT RATING (AMPERES)**

| CODE       | AMPERES |
|------------|---------|
| <b>631</b> | 31.000  |
| <b>635</b> | 35.000  |
| <b>640</b> | 40.000  |
| <b>645</b> | 45.000  |
| <b>650</b> | 50.000  |

**7 TERMINAL**

**A** Push in Stud  
**5** 10-32 Screw (Bus Type)

**8 ACTUATOR COLOR & LEGEND**

| Handle |        | Push Button |        |
|--------|--------|-------------|--------|
| 1      | White  | A           | White  |
| 2      | Black  | B           | Black  |
| 3      | Red    | C           | Red    |
| 4      | Green  | D           | Green  |
| 5      | Blue   | E           | Blue   |
| 6      | Yellow | F           | Yellow |
| 7      | Gray   | G           | Gray   |
| 8      | Orange | H           | Orange |

**9 FRONT PANEL HARDWARE****Handle**

**A** No outer Panel Hardware  
**B** Knurled Nut, Bright Nickel  
**C** Knurled Nut, Bright Nickel with Locking Ring  
**D** Knurled Nut, Black  
**E** Knurled Nut, Black with Locking Ring  
**F** Panel Dress, Bright Nickel  
**G** Panel Dress, Bright Nickel with Locking Ring  
**H** Panel Dress, Black  
**J** Panel Dress, Black with Locking Ring

**Push Button**

**1** No outer Panel Hardware  
**2** Knurled Nut, Bright Nickel

**10 LEGEND PLATE / BUTTON MARKING****Handle Actuator Legend Plate**

**B** ON - OFF Vertical  
**C** ON - OFF Horizontal

**Push-Pull Actuator Legend Plate**

**2** Rated Amps Horizontal  
**3** Rated Amps Line Side Down  
**4** Rated Amps Line Side Up


**11 BUSHING COLOR****B** Black**12 AGENCY APPROVAL****T** UL 489A Listed

## Notes:


1 Aux Switch only available with screw terminals

## Dimensional Specifications: in. [mm]



### PARALLEL POLE TERMINAL OPTIONS

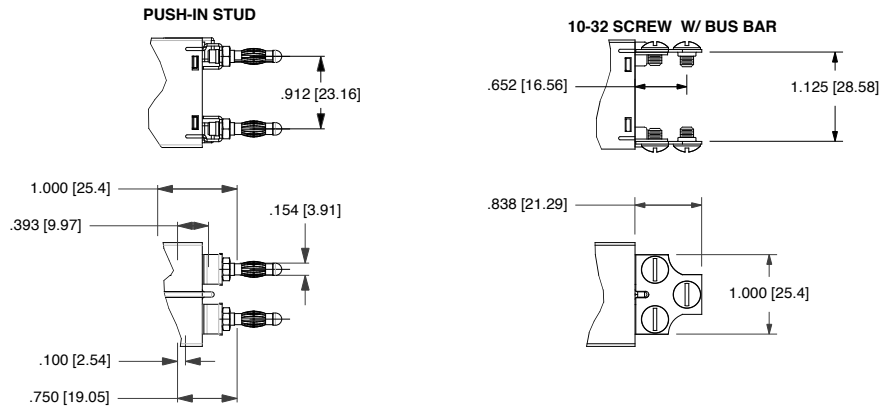


### ROCKER ACTUATOR DETAIL

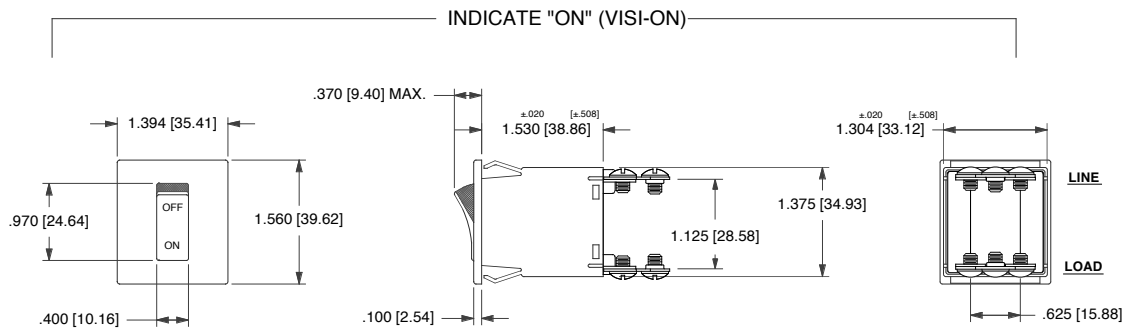


### INDICATE "OFF" (VISI-OFF) & SINGLE COLOR



### ROCKERGUARD CONFIGURATION

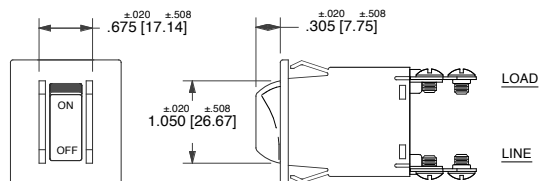

### PANEL CUT - OUT DETAIL (ROCKER)






| PANEL THICKNESS | DIM. A<br>+.005/+.13<br>-.009/-.00 |
|-----------------|------------------------------------|
| .062 [1.57]     | 1.385 [35.18]                      |
| .093 [2.36]     | 1.420 [36.07]                      |
| .125 [3.18]     | 1.460 [37.08]                      |


#### Notes:

- 1 All dimensions are in inches [millimeters].
- 2 Tolerance  $\pm 0.010$  [.25] unless otherwise specified.
- 3 Dimensions apply to both rocker styles.
- 4 I-o, on-off or dual legends available for vertical or horizontal mounting.
- 5 Notice that circuit breaker line and load terminal orientation on indicate "off" is opposite that of indicate "on".


### Dimensional Specifications: in. [mm]

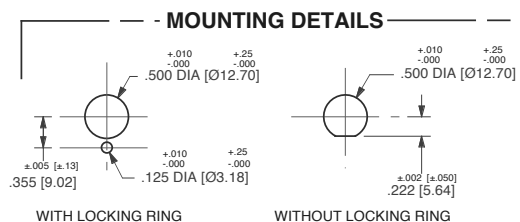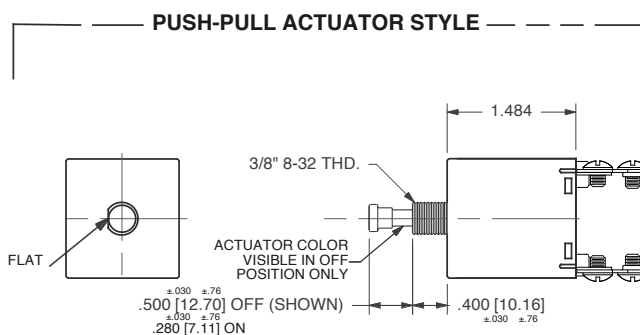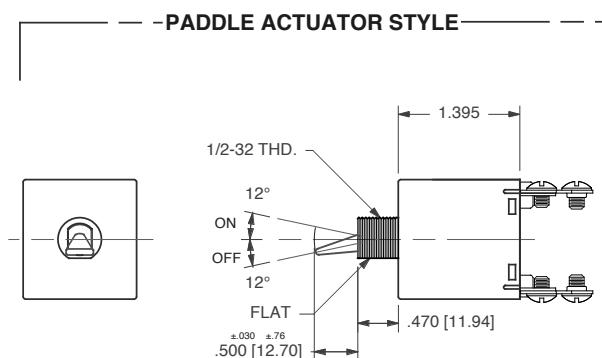



## LEGEND PLATES

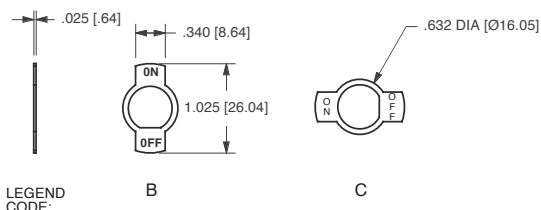



## PANEL HARDWARE

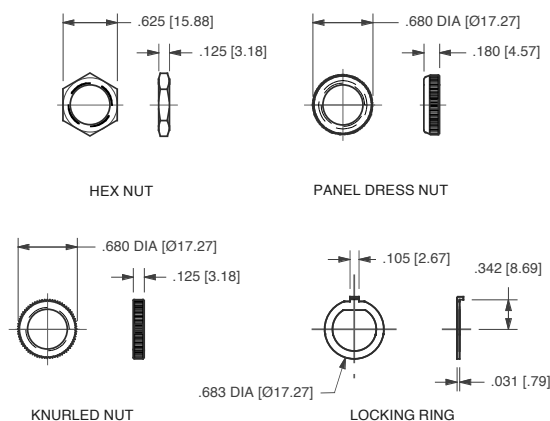


## MOUNTING DETAILS




## PANEL HARDWARE



## BUTTON MARKING ORIENTATION

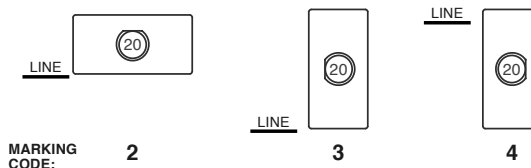

### .110QC AUXILIARY SWITCH TERMINALS



Notes:

- Notes:
- 1 All dimensions are in inches [millimeters].
  - 2 Tolerance  $\pm 0.010$  [25] unless otherwise specified.
  - 3 Dimensions apply to both rocker styles.
  - 4 I-o, on-off or dual legends available for vertical or horizontal mounting.
  - 5 Notice that circuit breaker line and load terminal orientation on indicate "off" is opposite that of indicate "on".

|          |            |          |          |           |          |                     |          |                  |          |            |          |                |                  |           |          |                |          |                    |
|----------|------------|----------|----------|-----------|----------|---------------------|----------|------------------|----------|------------|----------|----------------|------------------|-----------|----------|----------------|----------|--------------------|
| <b>M</b> | <b>G</b>   | <b>2</b> | <b>-</b> | <b>B</b>  | <b>-</b> | <b>34</b>           | <b>-</b> | <b>620</b>       | <b>-</b> | <b>1</b>   | <b>-</b> | <b>H</b>       | <b>C</b>         | <b>6</b>  | <b>-</b> | <b>7</b>       | <b>-</b> | <b>C</b>           |
| 1 Series | 2 Actuator | 3 Poles  |          | 4 Circuit |          | 5 Frequency & Delay |          | 6 Current Rating |          | 7 Terminal |          | 8 Illumination | 9 Actuator Color | 10 Legend |          | 11 Bezel Color |          | 12 Agency Approval |

### 1 SERIES M

### 2 ACTUATOR<sup>1</sup>

#### Non-Illuminated

#### single color

A Angled

B Flat

#### Two Color

#### Visi-Rocker

D Indicate ON

E Indicate OFF

#### Illuminated

#### single color

F Angled

G Flat

| STYLE      | INDICATE - "ON" (COILS) | INDICATE - "OFF" (COILS) | FLAT (CODES 8 & 9) | ANGLED (CODES 6 & 7) |
|------------|-------------------------|--------------------------|--------------------|----------------------|
| VERTICAL   |                         |                          |                    |                      |
| HORIZONTAL |                         |                          |                    |                      |

### 3 POLES

1 One 2 Two

### 4 CIRCUIT<sup>2</sup>

#### without Auxiliary Switch

A Switch Only (no coil), Maintained Contacts

B Series Trip (Current)

#### with Auxiliary Switch, Silver Contacts

M Series Trip (Current) Aux Switch .110 QC x .020 QC

P<sup>3</sup> Switch Only, Maintained Contacts .060 Dia, Round Solder Turret

Q<sup>3,4</sup> Switch Only, Maintained Contacts .058 Dia, Round Q.C.

R<sup>3,16</sup> Switch Only, Maintained Contacts .080 Dia x .020 Flat Q.C.

S<sup>3</sup> Series Trip (Current) .060 Dia, Round Solder Turret

T<sup>3,4</sup> Series Trip (Current) .058 Dia, Round Q.C.

U<sup>3,16</sup> Series Trip, Maintained Contacts .080 Dia x .020 Flat Q.C.

#### with Auxiliary Switch, Gold Contacts

2<sup>3,4</sup> Switch Only, Maintained Contacts .058 Dia, Round Q.C.

3<sup>3,16</sup> Switch Only, Maintained Contacts .080 Dia x .020 Flat Q.C.

4<sup>3,4</sup> Series Trip (Current) .058 Dia, Round Q.C.

5<sup>3,16</sup> Series Trip, Maintained Contacts .080 Dia x .020 Flat Q.C.

9 Series Trip (Current) Aux Switch .110 QC x .020 QC

#### Terminal Type:

.110 QC x .020 QC

.060 Dia, Round Solder Turret

.058 Dia, Round Q.C.

.080 Dia x .020 Flat Q.C.

.060 Dia, Round Solder Turret

.058 Dia, Round Q.C.

.080 Dia x .020 Flat Q.C.

### 5 FREQUENCY & DELAY

03 DC 50/60Hz, Switch Only

10 DC Instantaneous

12 DC Short

14 DC Medium

20 50/60Hz Instantaneous

22 50/60Hz Short

24 50/60Hz Medium

30 DC, 50/60Hz Instantaneous

32 DC, 50/60Hz Short

34 DC, 50/60Hz Medium

62 50/60Hz Short, High-inrush

64 50/60Hz Medium, High-inrush

72 DC, Short, High-inrush

74 DC, Medium, High-inrush

92 DC, 50/60Hz Short, High-inrush

94 DC, 50/60Hz Medium, High-inrush

| VOLTAGE     |           |       | FULL LOAD AMP RATING |                                  | GENERAL PURPOSE AMP RATING |                                  | TUNGSTEN LAMP RATING |                                  |
|-------------|-----------|-------|----------------------|----------------------------------|----------------------------|----------------------------------|----------------------|----------------------------------|
| MAX. RATING | FREQUENCY | PHASE | MAX. AMPS            | CHOOSE CURRENT COIL RATING CODE: | MAX. AMPS                  | CHOOSE CURRENT COIL RATING CODE: | MAX. AMPS            | CHOOSE CURRENT COIL RATING CODE: |
| 32          | DC        | -     | 15                   | 615                              | 25                         | 625                              | -                    | -                                |
| 50          | DC        | -     | -                    | -                                | 7.5                        | Consult Factory                  | -                    | -                                |
| 65          | DC        | -     | 15                   | 615                              | 25                         | 625                              | -                    | -                                |
| 125         | 50/60HZ   | 1     | 15                   | 615                              | 25                         | 625                              | 15                   | 615                              |
| 250         | 50/60HZ   | 1     | 12                   | 612                              | -                          | -                                | -                    | -                                |
| 250         | 50/60HZ   | 1     | 15                   | 615                              | 25                         | 625                              | -                    | -                                |

#### Notes:

- One actuator is located in the center of each multi-pole breaker.
- For Switch Only circuits, select Current Coil Rating from the above chart.
- One Auxiliary Switch is supplied per breaker. On two-pole breakers, standard Auxiliary Switch mounting is in pole one. Auxiliary Switch option limited to Series Trip & Switch Only circuits, & is not available in single pole illuminated breakers, or Back Connected Screw or Push-In Stud terminals.
- Mates with AMP .058" diameter pin receptacles: 60983-1 (gold plated) & 60983-2 (tin plated).
- For neon bulb applications at 120VAC @ 47K, 1/4 WATT and for 250VAC applications @ 150K, 1/4 WATT, external resistors must be supplied by customer.
- On Visi-Rocker breakers, Visi portion of rocker cannot be the same color as the bezel.
- For LED (DC or rectified AC) applications, LED is mounted in the center of the rocker actuator with electrical characteristics: 100 millicandela at 20mA; Maximum power dissipation = 75mW at 25°C; Maximum forward current = 25mA; Typical forward voltage = 2.1V at 20mA; Typical reverse current = 100uA at 3V. Customer supplies the proper external resistor limiting current to these values.
- Rocker color for LED's and green neon lamp must be clear, smoke gray, white translucent or match color of LED or neon lamp.
- Other colors available. Consult factory.
- TUV 20A, VDE 15A. UL Recognized and CSA Accepted to 30 amps.
- Screw Terminals or Push-In Stud recommended above 20 amps.
- TUV or VDE Certified must have I-O or Dual Legends.
- Legend required on Visi-Rocker breakers.
- 30 amp rating not available with delay's 30, 32, 34, 92 or 94.
- Screw Terminals are VDE certified only with use of ring terminal attached to wire.
- Terminal code A available with circuit codes A & B only.
- Printed circuit board available with UL recognized approval only.
- Auxiliary switch (flat Q.C.) available with UL recognized approvals only.

### 6 CURRENT RATING (AMPERES)

| CODE | AMPERES |     |       |     |                          |
|------|---------|-----|-------|-----|--------------------------|
| 020  | 0.020   | 225 | 0.250 | 420 | 2.000                    |
| 025  | 0.025   | 230 | 0.300 | 522 | 2.250                    |
| 030  | 0.030   | 235 | 0.350 | 425 | 2.500                    |
| 035  | 0.035   | 240 | 0.400 | 527 | 2.750                    |
| 040  | 0.040   | 245 | 0.450 | 430 | 3.000                    |
| 045  | 0.045   | 250 | 0.500 | 435 | 3.500                    |
| 050  | 0.050   | 255 | 0.550 | 440 | 4.000                    |
| 055  | 0.055   | 260 | 0.600 | 445 | 4.500                    |
| 060  | 0.060   | 265 | 0.650 | 450 | 5.000                    |
| 065  | 0.065   | 270 | 0.700 | 455 | 5.500                    |
| 070  | 0.070   | 275 | 0.750 | 460 | 6.000                    |
| 075  | 0.075   | 280 | 0.800 | 465 | 6.500                    |
| 080  | 0.080   | 285 | 0.850 | 470 | 7.000                    |
| 085  | 0.085   | 290 | 0.900 | 475 | 7.500                    |
| 090  | 0.090   | 295 | 0.950 | 480 | 8.000                    |
| 090  | 0.095   | 410 | 1.000 | 485 | 8.500                    |
| 210  | 0.100   | 512 | 1.250 | 490 | 9.000                    |
| 215  | 0.150   | 415 | 1.500 | 495 | 9.500                    |
| 220  | 0.200   | 517 | 1.750 | 610 | 10.000                   |
|      |         |     |       |     | 630 <sup>12</sup> 30.000 |

### 7 TERMINAL

- |                 |                               |                 |                       |
|-----------------|-------------------------------|-----------------|-----------------------|
| 1               | Push-On 0.250 Tab (Q.C.)      | A <sup>14</sup> | Push-In Stud          |
| 2 <sup>10</sup> | Screw 8-32 with Upturned Lugs | P <sup>15</sup> | Printed Circuit Board |
| 3 <sup>10</sup> | Screw 8-32 (Bus Type)         |                 |                       |

### 8 ROCKER ILLUMINATION

#### Non-Illuminated

#### Neon<sup>5</sup>

without resistor, 120VAC/250VAC

#### LED<sup>7,8</sup>

without resistor

with resistor, 4-8 VDC

with resistor, 9-16 VDC

| A | Neon   | Green Glow <sup>8</sup> |
|---|--------|-------------------------|
| B | Red    | Green                   |
| D | Blue   | Amber                   |
| E | Yellow | K                       |
| F | Gray   | L                       |
|   |        | M                       |

### 9 ACTUATOR & LEGEND COLOR

#### Solid Color

| Actuator                 | Legend                                                  |
|--------------------------|---------------------------------------------------------|
| 1 White                  | Black                                                   |
| 2 Black                  | White                                                   |
| 3 Red                    | White                                                   |
| 4 Green                  | White                                                   |
| 5 Blue                   | White                                                   |
| 6 Yellow                 | Black                                                   |
| 7 Gray                   | Black                                                   |
| 8 Orange                 | Black                                                   |
| Visi-Rocker <sup>6</sup> | Visi & Legend (remainder of rocker same color as bezel) |
| 1 White                  |                                                         |
| 2 Black                  |                                                         |
| 3 Red                    |                                                         |
| 4 Green                  |                                                         |
| 5 Blue                   |                                                         |
| 6 Yellow                 |                                                         |
| 7 Gray                   |                                                         |
| 8 Orange                 |                                                         |
| Illuminated <sup>8</sup> | Actuator                                                |
| A Clear                  | Legend                                                  |
| B Red Transparent        | White                                                   |
| C Green Transparent      | White                                                   |
| D Amber Transparent      | White                                                   |
| E Smoke Gray Transparent | White                                                   |
| F White Translucent      | Black                                                   |

### 10 LEGEND<sup>11</sup>

- |   |                     |   |                  |
|---|---------------------|---|------------------|
| 1 | No Legend           | 4 | I - O Vertical   |
| 2 | ON - OFF Vertical   | 5 | I - O Horizontal |
| 3 | ON - OFF Horizontal | 6 | Dual Vertical    |
|   |                     | 7 | Dual Horizontal  |

### 11 BEZEL COLOR / STYLE<sup>9</sup>

| Color | without Rockerguard | with Rockerguard |
|-------|---------------------|------------------|
| White | A                   | 1                |
| Black | B                   | 2                |
| Gray  | G                   | 7                |

### 12 AGENCY APPROVAL<sup>10</sup>

- |   |                                             |
|---|---------------------------------------------|
| C | UL Recognized & CSA Accepted                |
| D | VDE Certified, UL Recognized & CSA Accepted |
| E | TUV Certified, UL Recognized & CSA Accepted |

|          |            |          |          |           |          |                     |          |                  |          |            |          |                |                  |           |          |                |          |                    |
|----------|------------|----------|----------|-----------|----------|---------------------|----------|------------------|----------|------------|----------|----------------|------------------|-----------|----------|----------------|----------|--------------------|
| <b>M</b> | <b>A</b>   | <b>1</b> | <b>-</b> | <b>B</b>  | <b>-</b> | <b>14</b>           | <b>-</b> | <b>620</b>       | <b>-</b> | <b>1</b>   | <b>-</b> | <b>A</b>       | <b>1</b>         | <b>6</b>  | <b>-</b> | <b>2</b>       | <b>-</b> | <b>J</b>           |
| 1 Series | 2 Actuator | 3 Poles  |          | 4 Circuit |          | 5 Frequency & Delay |          | 6 Current Rating |          | 7 Terminal |          | 8 Illumination | 9 Actuator Color | 10 Legend |          | 11 Bezel Color |          | 12 Agency Approval |

### 1 SERIES M

### 2 ACTUATOR <sup>1</sup>

**Non-Illuminated single color**  
**A** Angled  
**B** Flat

**Two Color Visi-Rocker**  
**D** Indicate ON  
**E** Indicate OFF

**Illuminated single color**  
**F** Angled  
**G** Flat

| STYLE      | INDICATE "ON" (CODES 1 & 2) | INDICATE "OFF" (CODES 3 & 4) | FLAT (CODES 5 & 6) | ANGLED (CODES 7 & 8) |
|------------|-----------------------------|------------------------------|--------------------|----------------------|
| VERTICAL   |                             |                              |                    |                      |
| HORIZONTAL |                             |                              |                    |                      |

### 3 POLES

**1** One

### 4 CIRCUIT <sup>2</sup>

**without Auxiliary Switch**

**B** Series Trip (Current)

**with Auxiliary Switch, Silver Contacts**

**M** Series Trip (Current) Aux Switch

**S** <sup>3</sup> Series Trip (Current)

**T** <sup>3,4</sup> Series Trip (Current)

**U** <sup>3,16</sup> Series Trip, Maintained Contacts

**with Auxiliary Switch, Gold Contacts**

**4** <sup>3,4</sup> Series Trip (Current)

**5** <sup>3,16</sup> Series Trip, Maintained Contacts

**9** Series Trip (Current) Aux Switch

**Terminal Type:**

**.110 QC x .020 QC**

**.060 Dia, Round Solder Turret**

**.058 Dia, Round Q.C.**

**.080 Dia x .020 Flat Q.C.**

**.058 Dia, Round Q.C.**

**.080 Dia x .020 Flat Q.C.**

**.110 QC x .020 QC**

### 5 FREQUENCY & DELAY

**10** DC Instantaneous

**12** DC Short

**14** DC Medium

**72** DC, Short, High-inrush

**74** DC, Medium, High-inrush

### 6 CURRENT RATING (AMPERES)

| CODE | AMPERES |     |       |     |        |
|------|---------|-----|-------|-----|--------|
| 020  | 0.020   | 225 | 0.250 | 420 | 2.000  |
| 025  | 0.025   | 230 | 0.300 | 522 | 2.250  |
| 030  | 0.030   | 235 | 0.350 | 425 | 2.500  |
| 035  | 0.035   | 240 | 0.400 | 527 | 2.750  |
| 040  | 0.040   | 245 | 0.450 | 430 | 3.000  |
| 045  | 0.045   | 250 | 0.500 | 435 | 3.500  |
| 050  | 0.050   | 255 | 0.550 | 440 | 4.000  |
| 055  | 0.055   | 260 | 0.600 | 445 | 4.500  |
| 060  | 0.060   | 265 | 0.650 | 450 | 5.000  |
| 065  | 0.065   | 270 | 0.700 | 455 | 5.500  |
| 070  | 0.070   | 275 | 0.750 | 460 | 6.000  |
| 075  | 0.075   | 280 | 0.800 | 465 | 6.500  |
| 080  | 0.080   | 285 | 0.850 | 470 | 7.000  |
| 085  | 0.085   | 290 | 0.900 | 475 | 7.500  |
| 090  | 0.090   | 295 | 0.950 | 480 | 8.000  |
| 090  | 0.095   | 410 | 1.000 | 485 | 8.500  |
| 210  | 0.100   | 512 | 1.250 | 490 | 9.000  |
| 215  | 0.150   | 415 | 1.500 | 495 | 9.500  |
| 220  | 0.200   | 517 | 1.750 | 610 | 10.000 |

#### Notes:

- One actuator is located in the center of each multi-pole breaker.
- One Auxiliary Switch is supplied per breaker. Auxiliary Switch option limited to Series Trip & Switch Only circuits, and is not available in single pole illuminated breakers, or with Back Connected Screw or Push-In Stud terminals.
- Mates with AMP .058" diameter pin receptacles: 60983-1 (gold plated) & 60983-1 (tin plated).
- For neon bulb applications at 120VAC @ 47K, 1/4 WATT and for 250VAC applications @ 150K, 1/4 WATT, external resistors must be supplied by customer.
- For LED (DC or rectified AC) applications, LED is mounted in the center of the rocker actuator with electrical characteristics as follows: 100 millicandela at 20mA; Maximum power dissipation = 75mW at 25°C; Maximum forward current = 25mA; Typical forward voltage = 2.1V at 20mA; Typical reverse current = 100uA at 3V. Customer supplies the proper external resistor limiting current to these values.
- On Visi-Rocker breakers, Visi portion of rocker cannot be the same color as the bezel.
- Rocker color for LED's and green neon lamp must be clear, smoke gray, white translucent or match color of LED or neon lamp.
- Other colors available. Consult factory.
- UL Recognized, CSA Accepted, UL489A Listed, and TUV Certified to 30 amps. Screw Terminals recommended above 20 amps.
- UL489A Listed must have ON-OFF or Dual legends.
- TUV Certified approvals must have I - O or Dual legends.
- Terminal code A available with circuit codes A & B only.
- Printed circuit board available with UL recognized approval only.
- Auxiliary switch (flat Q.C.) available with UL recognized approvals only.

### 7 TERMINAL

**1** Push-On 0.250 Tab (Q.C.)

**2** Screw 8-32 with Upturned Lugs

**3** Screw 8-32 (Bus Type)

**A** <sup>11</sup> Push-In Stud

**P** <sup>12</sup> Printed Circuit Board

### 8 ROCKER ILLUMINATION

**Non-Illuminated**

**Neon** <sup>4</sup> without resistor, 120VAC/250VAC

**LED** <sup>7, 8</sup> without resistor

with resistor, 4-8 VDC

with resistor, 9-16 VDC

**A** Neon

**B** Red

**D** Green

**E** Blue

**F** Yellow

Green Glow <sup>8</sup>

**C** Green

**G** Amber

**H** Black

**J** White

**K** White

**L** White

**M** Black

### 9 ACTUATOR & LEGEND COLOR

**Solid Color**

**1**

**2**

**3**

**4**

**5**

**6**

**7**

**8**

**Visi-Rocker** <sup>6</sup>

**1**

**2**

**3**

**4**

**5**

**6**

**7**

**8**

**Illuminated** <sup>7</sup>

**A**

**B**

**C**

**D**

**E**

**F**

Actuator

White

Black

Red

Green

Blue

Yellow

Gray

Orange

Visi & Legend (remainder of rocker same color as bezel)

White

Black

Red

Green

Blue

Yellow

Gray

Orange

Actuator

Clear

Red Transparent

Green Transparent

Amber Transparent

Smoke Gray Transparent

White Translucent

Legend

Black

White

White

White

White

Black

Black

Black

Legend

White

White

White

White

White

Black

### 10 LEGEND <sup>10</sup>

**1** No Legend (Single Color or Illuminated Rocker Options Only)

**2** ON - OFF Vertical

**3** ON - OFF Horizontal

**4** I - O Vertical

**5** I - O Horizontal

**6** Dual Vertical

**7** Dual Horizontal

### 11 BEZEL COLOR / STYLE <sup>8</sup>

**Color**

**White**

**Black**

**Gray**

without Rockerguard

**A**

**B**

**G**

with Rockerguard

**1**

**2**

**7**

### 12 AGENCY APPROVAL <sup>9</sup>

**J** UL489A Listed & TUV Certified



**M** UL Recognized & CSA Accepted

**N** TUV Certified, UL Recognized & CSA Accepted




**T** UL489A Listed

## Circuit &amp; Terminal Diagrams: in. [mm]

## SERIES TRIP

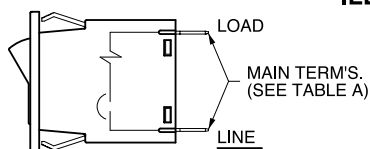SERIES TRIP W/  
ILLUMINATED ROCKER

## SWITCH ONLY

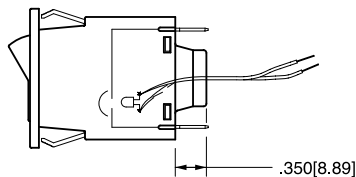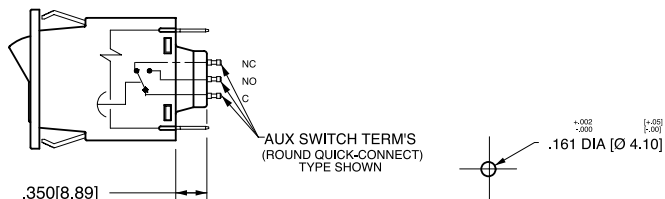SWITCH ONLY W/  
ILLUMINATED ROCKERSERIES TRIP W/  
AUXILIARY SWITCH

PUSH-IN STUD  
MATING HOLE

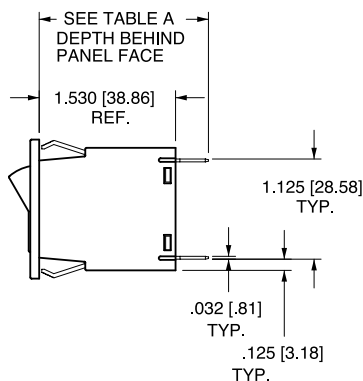


TABLE - A

| TERMINAL DESCRIPTION |                           | DEPTH BEHIND<br>PANEL FACE |
|----------------------|---------------------------|----------------------------|
| MAIN                 | TAB (Q.C.)                | 1.900 [48.26]              |
|                      | SCREW (#8-32)**           | 1.940 [49.28]              |
|                      | PUSH-IN STUD              | 2.530 [64.26]              |
| *AUX.<br>SWITCH      | DOUBLE SOLDER TURRET TYPE | 2.045 [51.94]              |
|                      | ROUND Q.C. TYPE           | 2.035 [51.69]              |
|                      | FLAT QUICK CONNECT        | 2.139 [54.33]              |
|                      | FLAT SOLDER LUG           | 2.022 [51.36]              |





\* AUX. SWITCH IS NOT AVAILABLE ON SINGLE POLE ILLUMINATED UNITS.  
WHEN CALLED FOR ON MULTI-POLE UNITS, ONLY ONE AUX. SWITCH  
IS NORMALLY SUPPLIED, MOUNTED AS SHOWN ON CLA-8003.

\*\* RECOMMENDED TIGHTENING TORQUE 12-15 IN LBS [1.4-2.7 NM]

## Notes:





- 1 All dimensions are in inches [millimeters].
- 2 Tolerance  $\pm .020$  [.51] unless otherwise specified.
- 3 Schematic shown represents current trip circuit.

## TERMINAL DIMENSIONAL DETAIL

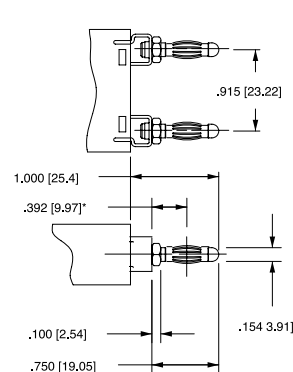
TAB (Q.C.)  
TERMINALSCREW TERMINAL  
#8-32 WITH  
UPTURNED LUGSSCREW TERMINAL  
#8-32  
BUSPUSH-IN STUD  
TERMINAL

\*CENTERLINE OF  
PUSH-IN STUD  
CONTACT AREA

## AUXILIARY SWITCH TERMINALS





DOUBLE SOLDER  
TURRET TYPEROUND  
QUICK-CONNECT  
TYPE

## .110 QC







\*AVAILABLE THROUGH SPECIAL  
CATALOG PART NUMBER

## Dimensional Specifications: in. [mm]

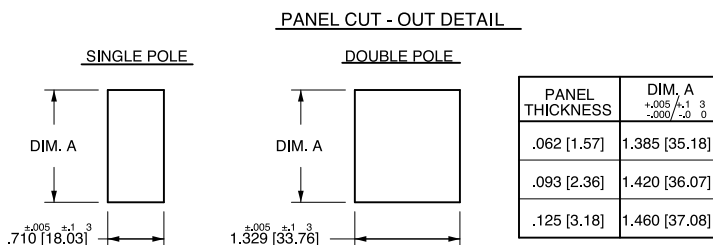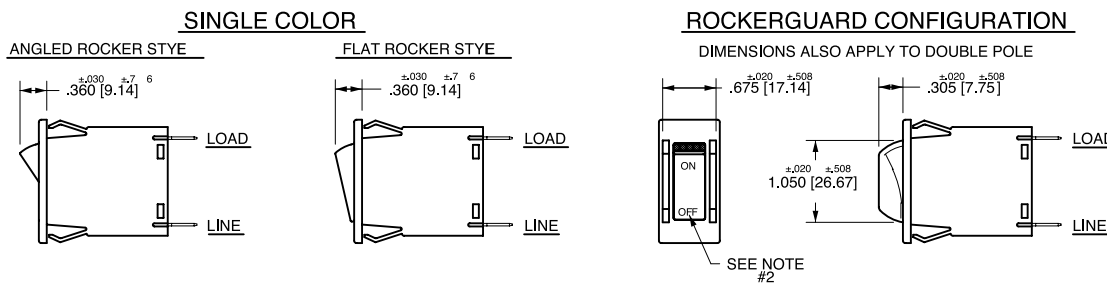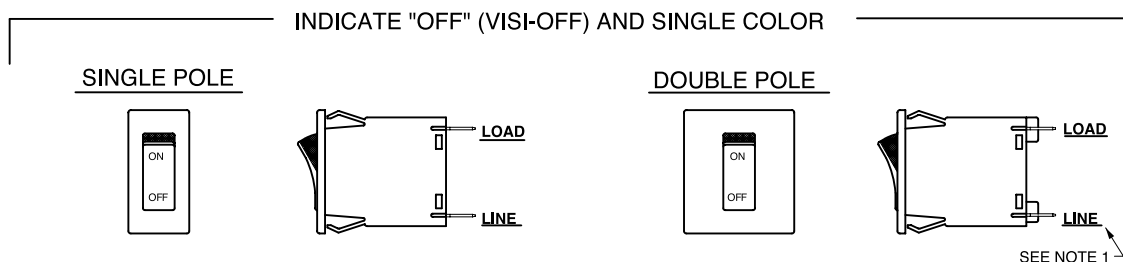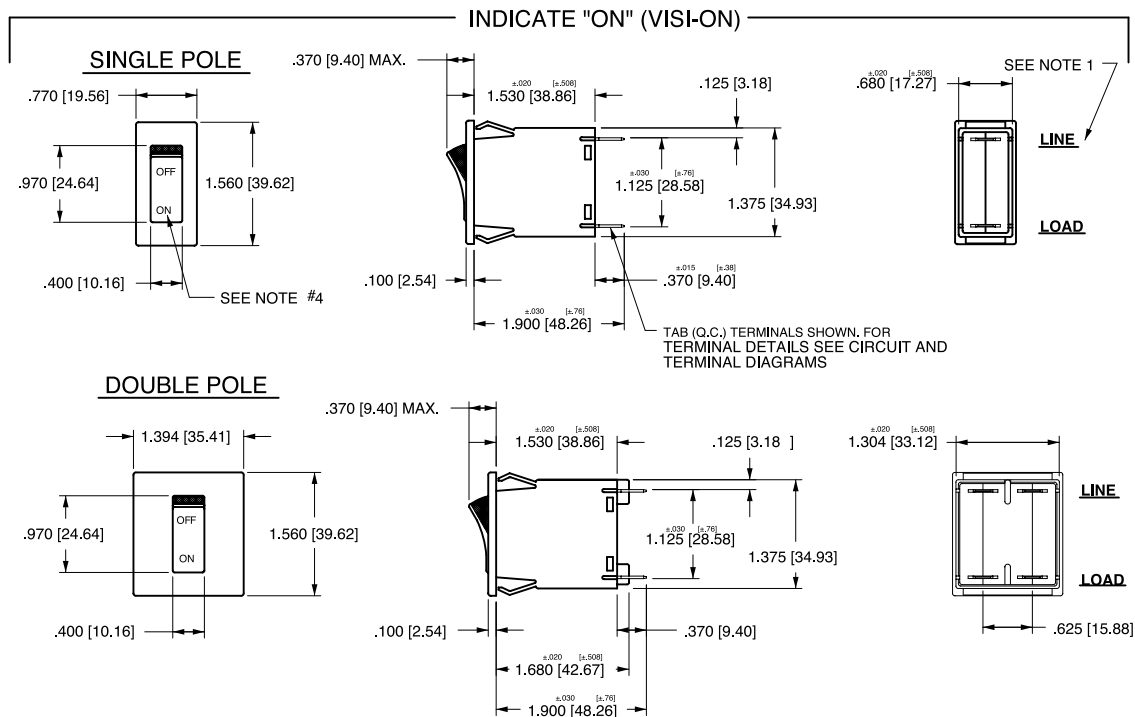


### Notes:

- 1 Dimensions apply to all variations shown. Notice that circuit breaker line & load terminal orientation on indicate OFF is opposite of indicate ON.
- 2 I-O, ON-OFF or dual legends available for vertical or horizontal mounting. For pole orientation with horizontal legend, rotate front view clockwise 90°.
- 3 All dimensions are in inches [millimeters].
- 4 Tolerance  $\pm 0.20$  [5.1] unless otherwise specified.

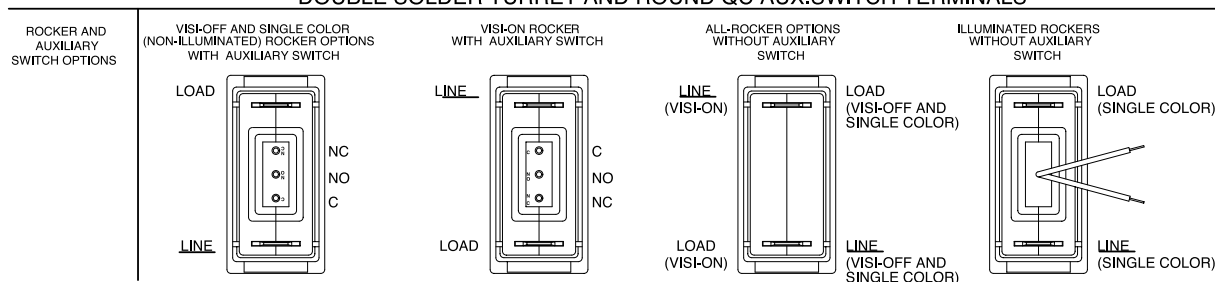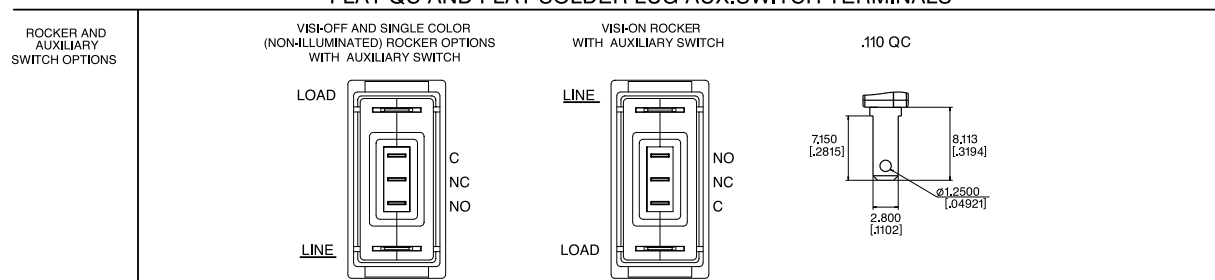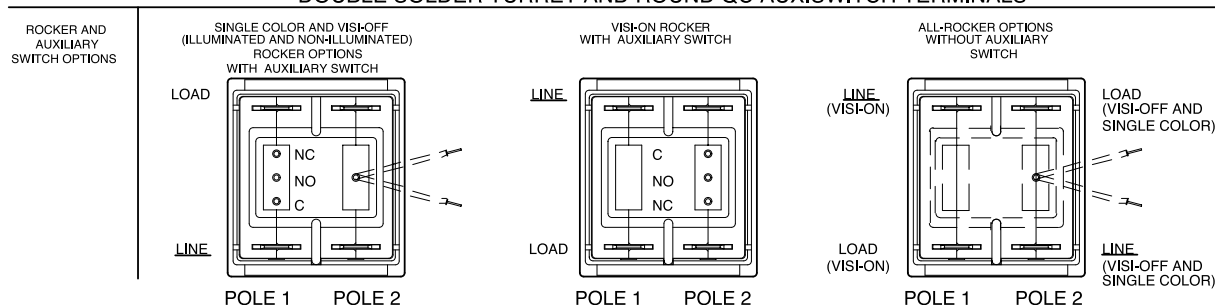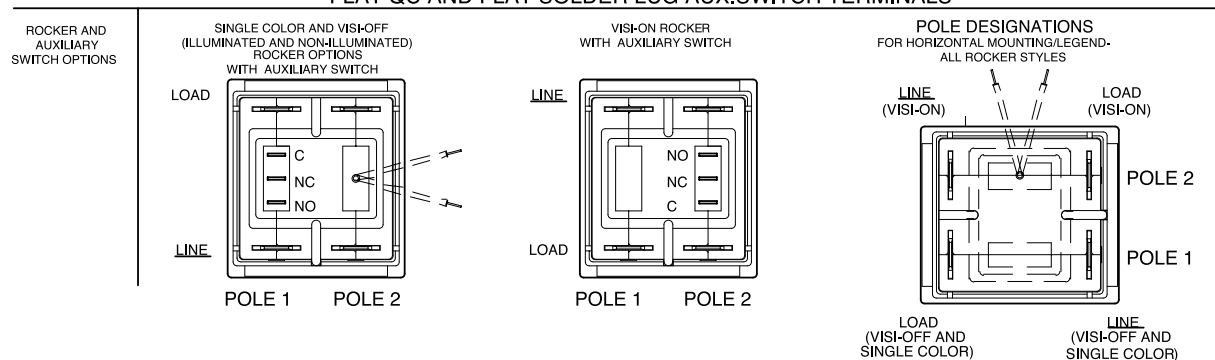**ONE POLE****SINGLE POLE / ROCKER BREAKERS SHOWN WITH  
DOUBLE SOLDER TURRET AND ROUND QC AUX.SWITCH TERMINALS****SINGLE POLE / ROCKER BREAKERS SHOWN WITH  
FLAT QC AND FLAT SOLDER LUG AUX.SWITCH TERMINALS****TWO POLE****DOUBLE POLE / ROCKER BREAKERS SHOWN WITH  
DOUBLE SOLDER TURRET AND ROUND QC AUX.SWITCH TERMINALS****DOUBLE POLE / ROCKER BREAKERS SHOWN WITH  
FLAT QC AND FLAT SOLDER LUG AUX.SWITCH TERMINALS**

|          |            |          |          |           |          |                     |          |                  |          |            |          |                  |                        |                 |          |                  |          |                    |
|----------|------------|----------|----------|-----------|----------|---------------------|----------|------------------|----------|------------|----------|------------------|------------------------|-----------------|----------|------------------|----------|--------------------|
| <b>M</b> | <b>M</b>   | <b>1</b> | <b>-</b> | <b>B</b>  | <b>-</b> | <b>34</b>           | <b>-</b> | <b>260</b>       | <b>-</b> | <b>1</b>   | <b>-</b> | <b>1</b>         | <b>B</b>               | <b>B</b>        | <b>-</b> | <b>C</b>         | <b>-</b> | <b>B</b>           |
| 1 Series | 2 Actuator | 3 Poles  |          | 4 Circuit |          | 5 Frequency & Delay |          | 6 Current Rating |          | 7 Terminal |          | 8 Actuator Color | 9 Front Panel Hardware | 10 Legend Plate |          | 11 Bushing Color |          | 12 Agency Approval |

**1 SERIES****M****2 ACTUATOR <sup>1</sup>**

|                                          |                  |                                                                                   |          |                      |                                                                                   |
|------------------------------------------|------------------|-----------------------------------------------------------------------------------|----------|----------------------|-----------------------------------------------------------------------------------|
| <b>Handle</b>                            | <b>Paddle</b>    |  | <b>N</b> | <b>Baton</b>         |  |
| <b>Push Button</b>                       | <b>Push-Pull</b> |  | <b>U</b> | <b>Push To Reset</b> |  |
| <b>Push Button with Snap-In Mounting</b> | <b>Push-Pull</b> |  | <b>W</b> | <b>Push To Reset</b> |  |

**3 POLES**

1 One 2 Two

**4 CIRCUIT <sup>2</sup>****without Auxiliary Switch**

**A** Switch Only (no coil), Maintained Contacts  
**B** Series Trip (Current)

**with Auxiliary Switch, Silver Contacts**

**M** Series Trip (Current) Aux Switch .110 QC x .020 QC  
**P**<sup>3</sup> Switch Only, Maintained Contacts .060 Dia, Round Solder Turret  
**Q**<sup>3,4</sup> Switch Only, Maintained Contacts .058 Dia, Round Q.C.  
**R**<sup>3,13</sup> Switch Only, Maintained Contacts .080 Dia x .020 Flat Q.C.  
**S**<sup>3</sup> Series Trip (Current) .060 Dia, Round Solder Turret  
**T**<sup>3,4</sup> Series Trip (Current) .058 Dia, Round Q.C.  
**U**<sup>3,13</sup> Series Trip, Maintained Contacts .080 Dia x .020 Flat Q.C.

**with Auxiliary Switch, Gold Contacts**

**2**<sup>3,4</sup> Switch Only, Maintained Contacts .058 Dia, Round Q.C.  
**3**<sup>3,13</sup> Switch Only, Maintained Contacts .080 Dia x .020 Flat Q.C.  
**4**<sup>3,4</sup> Series Trip (Current) .058 Dia, Round Q.C.  
**5**<sup>3,13</sup> Series Trip, Maintained Contacts .080 Dia x .020 Flat Q.C.  
**9** Series Trip (Current) Aux Switch .110 QC x .020 QC

**Terminal Type:**

.110 QC x .020 QC  
.060 Dia, Round Solder Turret  
.058 Dia, Round Q.C.  
.080 Dia x .020 Flat Q.C.  
.060 Dia, Round Solder Turret  
.058 Dia, Round Q.C.  
.080 Dia x .020 Flat Q.C.

**5 FREQUENCY & DELAY**

|           |                           |           |                                 |
|-----------|---------------------------|-----------|---------------------------------|
| <b>03</b> | DC 50/60Hz, Switch Only   | <b>32</b> | DC, 50/60Hz Short               |
| <b>10</b> | DC Instantaneous          | <b>34</b> | DC, 50/60Hz Medium              |
| <b>12</b> | DC Short                  | <b>62</b> | 50/60Hz Short, High-inrush      |
| <b>14</b> | DC Medium                 | <b>64</b> | 50/60Hz Medium, High-inrush     |
| <b>20</b> | 50/60Hz Instantaneous     | <b>72</b> | DC, Short, High-inrush          |
| <b>22</b> | 50/60Hz Short             | <b>74</b> | DC, Medium, High-inrush         |
| <b>24</b> | 50/60Hz Medium            | <b>92</b> | DC, 50/60Hz Short, High-inrush  |
| <b>30</b> | DC, 50/60Hz Instantaneous | <b>94</b> | DC, 50/60Hz Medium, High-inrush |

**6 CURRENT RATING (AMPERES)**

| CODE       | AMPERES |            |       |            |        |            |                     |
|------------|---------|------------|-------|------------|--------|------------|---------------------|
| <b>020</b> | 0.020   | <b>225</b> | 0.250 | <b>420</b> | 2.000  | <b>710</b> | 10.500              |
| <b>025</b> | 0.025   | <b>230</b> | 0.300 | <b>522</b> | 2.250  | <b>611</b> | 11.000              |
| <b>030</b> | 0.030   | <b>235</b> | 0.350 | <b>425</b> | 2.500  | <b>711</b> | 11.500              |
| <b>035</b> | 0.035   | <b>240</b> | 0.400 | <b>527</b> | 2.750  | <b>612</b> | 12.000              |
| <b>040</b> | 0.040   | <b>245</b> | 0.450 | <b>430</b> | 3.000  | <b>712</b> | 12.500              |
| <b>045</b> | 0.045   | <b>250</b> | 0.500 | <b>435</b> | 3.500  | <b>613</b> | 13.000              |
| <b>050</b> | 0.050   | <b>255</b> | 0.550 | <b>440</b> | 4.000  | <b>614</b> | 14.000              |
| <b>055</b> | 0.055   | <b>260</b> | 0.600 | <b>445</b> | 4.500  | <b>615</b> | 15.000              |
| <b>060</b> | 0.060   | <b>265</b> | 0.650 | <b>450</b> | 5.000  | <b>616</b> | 16.000              |
| <b>065</b> | 0.065   | <b>270</b> | 0.700 | <b>455</b> | 5.500  | <b>617</b> | 17.000              |
| <b>070</b> | 0.070   | <b>275</b> | 0.750 | <b>460</b> | 6.000  | <b>618</b> | 18.000              |
| <b>075</b> | 0.075   | <b>280</b> | 0.800 | <b>465</b> | 6.500  | <b>620</b> | 20.000              |
| <b>080</b> | 0.080   | <b>285</b> | 0.850 | <b>470</b> | 7.000  | <b>622</b> | 22.000              |
| <b>085</b> | 0.085   | <b>290</b> | 0.900 | <b>475</b> | 7.500  | <b>624</b> | 24.000              |
| <b>090</b> | 0.090   | <b>295</b> | 0.950 | <b>480</b> | 8.000  | <b>625</b> | 25.000              |
| <b>090</b> | 0.095   | <b>410</b> | 1.000 | <b>485</b> | 8.500  | <b>630</b> | 30.000 <sup>9</sup> |
| <b>210</b> | 0.100   | <b>512</b> | 1.250 | <b>490</b> | 9.000  |            |                     |
| <b>215</b> | 0.150   | <b>415</b> | 1.500 | <b>495</b> | 9.500  |            |                     |
| <b>220</b> | 0.200   | <b>517</b> | 1.750 | <b>610</b> | 10.000 |            |                     |

**7 TERMINAL**

**1** Push-On 0.250 Tab (Q.C.) **A**<sup>11</sup> Push-In Stud  
**2**<sup>10</sup> Screw 8-32 with Upturned Lugs **P**<sup>12</sup> Printed Circuit Board  
**3**<sup>10</sup> Screw 8-32 (Bus Type)

**8 ACTUATOR COLOR & LEGEND <sup>5</sup>**

| Gloss Handle | Push-Button | Actuator Color |
|--------------|-------------|----------------|
| <b>1</b>     | <b>A</b>    | White          |
| <b>2</b>     | <b>B</b>    | Black          |
| <b>3</b>     | <b>C</b>    | Red            |
| <b>4</b>     | <b>D</b>    | Green          |
| <b>5</b>     | <b>E</b>    | Blue           |
| <b>6</b>     | <b>F</b>    | Yellow         |
| <b>8</b>     | <b>H</b>    | Orange         |

**9 FRONT PANEL HARDWARE <sup>6</sup>**

| No outer Panel Hardware         | Handle   | Push-Button |
|---------------------------------|----------|-------------|
| <b>Knurled Nut</b>              | <b>A</b> | <b>1</b>    |
| Bright nickel                   | <b>B</b> | <b>2</b>    |
| Bright nickel with locking ring | <b>C</b> |             |
| Black                           | <b>D</b> |             |
| Black with locking ring         | <b>E</b> |             |
| <b>Panel Dress Nut</b>          | <b>F</b> |             |
| Bright nickel                   | <b>G</b> |             |
| Bright nickel with locking ring | <b>H</b> |             |
| Black                           | <b>J</b> |             |
| Black with locking ring         |          |             |

**10 LEGEND PLATE / BUTTON MARKING****Handle Actuator Legend Plate (Actuator Styles M & N)**

**A** No Legend Plate  
**B** ON - OFF Vertical  
**C** ON - OFF Horizontal  
**D** I - O Vertical  
**E** I - O Horizontal

**Push-Pull Actuator Button Cap (Actuator Styles T & V)**

**1** No Marking  
**2** Rated Amps Horizontal  
**3** Rated Amps Line Side Down  
**4** Rated Amps Line Side Up

**Push-to-Reset Actuator Button (Actuator Styles U & W)**

**1** No Marking

**11 BUSHING COLOR <sup>7</sup>**

**B** Black

**12 AGENCY APPROVAL <sup>8</sup>**

**C** UL Recognized & CSA Accepted  
**D** VDE Certified, UL Recognized & CSA Accepted  
**E** TUV Certified, UL Recognized & CSA Accepted

| Voltage    |           |       | Full Load Amp Rating |                                 | General Purpose Amps |                                 | Tungsten Lamp Rating |                                 | Poles Breaking |
|------------|-----------|-------|----------------------|---------------------------------|----------------------|---------------------------------|----------------------|---------------------------------|----------------|
| Max Rating | Frequency | Phase | Max Amps             | Choose Current Coil Rating Code | Max Amps             | Choose Current Coil Rating Code | Max Amps             | Choose Current Coil Rating Code |                |
| 32         | DC        | -     | 15                   | 615                             | 25                   | 625                             | -                    | -                               | 1              |
| 50         | DC        | -     | -                    | -                               | 7.5                  | Consult Factory                 | -                    | -                               | 1              |
| 65         | DC        | 1     | 15                   | 615                             | 25                   | 625                             | -                    | -                               | 2              |
| 125        | 50/60Hz   | 1     | 15                   | 615                             | 25                   | 625                             | 15                   | 615                             | 1              |
| 250        | 50/60Hz   | 1     | 12                   | 612                             | -                    | -                               | -                    | -                               | 1              |
| 250        | 50/60Hz   | 1     | 15                   | 615                             | 25                   | 625                             | -                    | -                               | 2              |

**Notes:**

- One actuator is located in the center of each multi-pole breaker. Actuator codes V & W limited to single pole breakers only.
- Switch Only circuits are not available with Push-To-Reset actuators. For Switch Only circuits, select Current Coil Rating from the above chart.
- One Auxiliary Switch is supplied per breaker. On two-pole breakers, standard Auxiliary Switch mounting is in pole one. Auxiliary Switch option limited to Series Trip and Switch Only circuits. Not available with back connect screw or push-in stud terminals.
- Mates with AMP .058" diameter pin receptacles including 60983-1 (gold plated) and 60983-2 (tin plated).
- Actuator color is only visible in the OFF position on Push-Pull actuators.
- All units except snap-in mounting have one hex nut installed on bushing for use behind the panel.
- Other colors available. Consult factory.
- TUV 20A, VDE 15A. UL Recognized and CSA Accepted to 30 amps. Screw Terminals or Push-In Stud recommended above 20 amps.
- 30 amp rating not available with delay's 30, 32, 34, 92 or 94.
- Screw Terminals are VDE certified only with use of ring terminal attached to wire.
- Terminal code A available with circuit codes A & B only.
- Printed circuit board available with UL recognized approval only.
- Auxiliary switch (flat Q.C.) available with UL recognized approvals only.

|          |            |          |           |                     |                  |            |                  |                        |                 |                  |                    |
|----------|------------|----------|-----------|---------------------|------------------|------------|------------------|------------------------|-----------------|------------------|--------------------|
| <b>M</b> | <b>M</b>   | <b>1</b> | <b>B</b>  | <b>14</b>           | <b>620</b>       | <b>1</b>   | <b>1</b>         | <b>B</b>               | <b>B</b>        | <b>B</b>         | <b>J</b>           |
| 1 Series | 2 Actuator | 3 Poles  | 4 Circuit | 5 Frequency & Delay | 6 Current Rating | 7 Terminal | 8 Actuator Color | 9 Front Panel Hardware | 10 Legend Plate | 11 Bushing Color | 12 Agency Approval |

**1 SERIES****M****2 ACTUATOR <sup>1</sup>****Handle****M**

Paddle

**Push Button****T**

Push-Pull

**Push Button with****Snap-In Mounting****V**

Push-Pull

**N**

Baton

**U <sup>8</sup>**

Push To Reset

**W <sup>8</sup>**

Push To Reset

**3 POLES****1** One**4 CIRCUIT****without Auxiliary Switch****B** Series Trip (Current)**with Auxiliary Switch, Silver Contacts****M** Series Trip (Current) Aux Switch**S <sup>3</sup>** Series Trip (Current)**T <sup>3,4</sup>** Series Trip (Current)**U <sup>3,13</sup>** Series Trip, Maintained Contacts**with Auxiliary Switch, Gold Contacts****4 <sup>2,3</sup>** Series Trip (Current)**5 <sup>3,12</sup>** Series Trip, Maintained Contacts**9** Series Trip (Current) Aux Switch**Terminal Type:****M** .110 QC x .020 QC**S <sup>3</sup>** .060 Dia, Round Solder Turret**T <sup>3,4</sup>** .058 Dia, Round Q.C.**U <sup>3,13</sup>** .080 Dia x .020 Flat Q.C.**4 <sup>2,3</sup>** .058 Dia, Round Q.C.**5 <sup>3,12</sup>** .080 Dia x .020 Flat Q.C.**9** .110 QC x .020 QC**5 FREQUENCY & DELAY****10** DC Instantaneous**72** DC, Short, High-inrush**12** DC Short**74** DC, Medium, High-inrush**14** DC Medium**6 CURRENT RATING (AMPERES)**

| CODE       | AMPERES |            |       |            |        |
|------------|---------|------------|-------|------------|--------|
| <b>020</b> | 0.020   | <b>225</b> | 0.250 | <b>420</b> | 2.000  |
| <b>025</b> | 0.025   | <b>230</b> | 0.300 | <b>522</b> | 2.250  |
| <b>030</b> | 0.030   | <b>235</b> | 0.350 | <b>425</b> | 2.500  |
| <b>035</b> | 0.035   | <b>240</b> | 0.400 | <b>527</b> | 2.750  |
| <b>040</b> | 0.040   | <b>245</b> | 0.450 | <b>430</b> | 3.000  |
| <b>045</b> | 0.045   | <b>250</b> | 0.500 | <b>435</b> | 3.500  |
| <b>050</b> | 0.050   | <b>255</b> | 0.550 | <b>440</b> | 4.000  |
| <b>055</b> | 0.055   | <b>260</b> | 0.600 | <b>445</b> | 4.500  |
| <b>060</b> | 0.060   | <b>265</b> | 0.650 | <b>450</b> | 5.000  |
| <b>065</b> | 0.065   | <b>270</b> | 0.700 | <b>455</b> | 5.500  |
| <b>070</b> | 0.070   | <b>275</b> | 0.750 | <b>460</b> | 6.000  |
| <b>075</b> | 0.075   | <b>280</b> | 0.800 | <b>465</b> | 6.500  |
| <b>080</b> | 0.080   | <b>285</b> | 0.850 | <b>470</b> | 7.000  |
| <b>085</b> | 0.085   | <b>290</b> | 0.900 | <b>475</b> | 7.500  |
| <b>090</b> | 0.090   | <b>295</b> | 0.950 | <b>480</b> | 8.000  |
| <b>090</b> | 0.095   | <b>410</b> | 1.000 | <b>485</b> | 8.500  |
| <b>210</b> | 0.100   | <b>512</b> | 1.250 | <b>490</b> | 9.000  |
| <b>215</b> | 0.150   | <b>415</b> | 1.500 | <b>495</b> | 9.500  |
| <b>220</b> | 0.200   | <b>517</b> | 1.750 | <b>610</b> | 10.000 |

**7 TERMINAL <sup>4</sup>****1** Push-On 0.250 Tab (Q.C.)**2** Screw 8-32 with Upturned Lugs**3** Screw 8-32 (Bus Type)**A <sup>10</sup>**

Push-In Stud

**P <sup>11</sup>**

Printed Circuit Board

**8 ACTUATOR COLOR & LEGEND <sup>5</sup>****Gloss Handle****1****2****3****4****5****6****8****Push-Button****A****B****C****D****E****F****H****Actuator Color**

White

Black

Red

Green

Blue

Yellow

Orange

**9 FRONT PANEL HARDWARE <sup>6</sup>**

No outer Panel Hardware

**Knurled Nut**

Bright nickel

Bright nickel with locking ring

Black

Black with locking ring

**Panel Dress Nut**

Bright nickel

Bright nickel with locking ring


Black

Black with locking ring

**Handle****A****B****C****D****E****F****G****H****J****Push-Button****1****2****10 LEGEND PLATE / BUTTON MARKING****Handle Actuator Legend Plate (Actuator Styles M & N)****A** No Legend Plate**B** ON - OFF Vertical**C** ON - OFF Horizontal**D** I - O Vertical**E** I - O Horizontal**Push-Pull Actuator Button Cap (Actuator Styles T & V)****1 <sup>8</sup>** No Marking**2** Rated Amps Horizontal**3** Rated Amps Line Side Down**4** Rated Amps Line Side Up**Push-to-Reset Actuator Button (Actuator Styles U & W)****1 <sup>8</sup>** No Marking**11 BUSHING COLOR <sup>7</sup>****B** Black**12 AGENCY APPROVAL <sup>9</sup>****J** UL489A Listed, TUV Certified**M** UL Recognized, CSA Accepted**N** UL Recognized, TUV Certified**T** UL489A Listed

- One actuator is located in the center of each multi-pole breaker. Actuator codes V & W limited to single pole breakers only.
- One Auxiliary Switch is supplied per breaker. On two-pole breakers, standard Auxiliary Switch mounting is in pole one. Auxiliary Switch option limited to Series Trip and Switch Only circuits. Not available with Back Connected Screw or Push-in Stud terminals.
- Mates with AMP .058" diameter pin receptacles including 60983-1 (gold plated) and 60983-3 (tin plated).
- Screw terminals or Push-in Stud recommended above 20 amps.
- Actuator color is only visible in the OFF position on Push-Pull actuators.
- All units have one hex nut installed on bushing for use behind the panel.
- Other colors available. Consult factory.
- Not available with UL489A Listed breakers.
- UL Recognized, CSA Accepted and UL Listed to 30 amps.
- Terminal code A available with circuit codes A & B only.
- Printed circuit board available with UL recognized approval only.
- Auxiliary switch (flat Q.C.) available with UL recognized approvals only.

## Circuit & Terminal Diagrams: in. [mm]

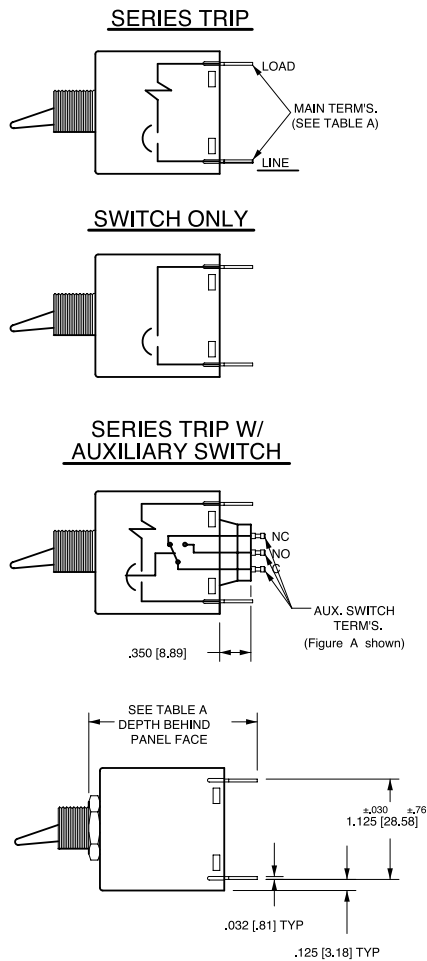

| TABLE A              |                           |                              |
|----------------------|---------------------------|------------------------------|
| TERMINAL DESCRIPTION |                           | DEPTH BEHIND<br>PANEL FACE * |
| MAIN                 | TAB (Q.C.)                | 1.890 [48.00]                |
|                      | SCREW (#8-32)             | 1.930 [49.03]                |
|                      | PUSH-IN STUD              | 2.520 [64.00]                |
| AUX. **<br>SWITCH    | DOUBLE SOLDER TURRET TYPE | 2.035 [51.69]                |
|                      | ROUND Q.C. TYPE           | 2.025 [51.44]                |
|                      | FLAT QUICK-CONNECT        | 2.129 [54.08]                |
|                      | FLAT SOLDER LUG           | 2.012 [51.10]                |

\*DEPTH INCLUDES BEHIND PANEL HEX NUT AS SUPPLIED ON ALL UNITS.

\*\* WHEN CALLED FOR ON MULTI-POLE UNITS, ONLY ONE AUX. SWITCH IS NORMALLY SUPPLIED, MOUNTED AS SHOWN IN FIG. A

### MULTI-POLE IDENTIFICATION SCHEME

SOLDER TURRET AND ROUND  
QC AUX SWITCH TERMINALS




FIG. A

FLAT QC AND SOLDER LUG  
AUX SWITCHTERMINALS





FIG. B


Notes:

- 1 All dimensions are in inches [millimeters].
- 2 Tolerance ±.020 [.51] unless otherwise specified.

### TERMINAL DIMENSIONAL DETAIL

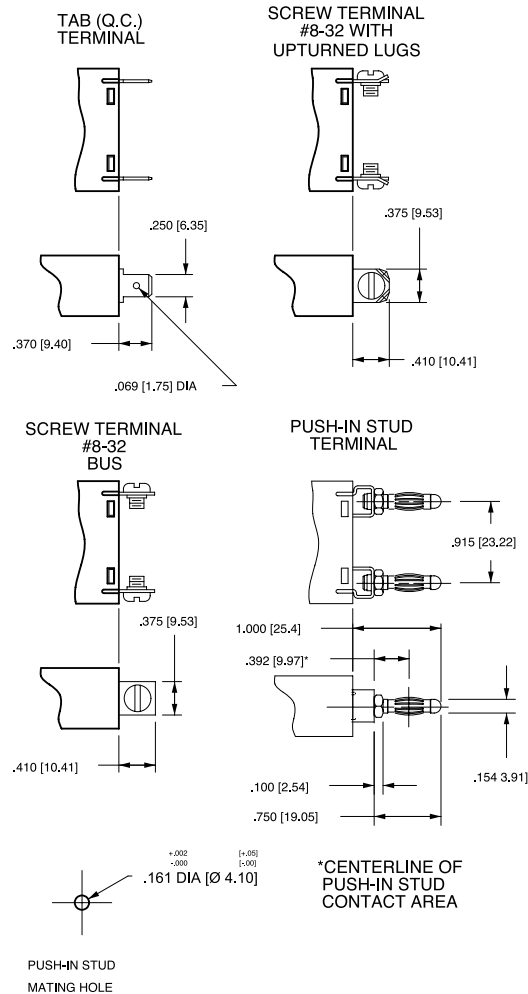

### AUXILIARY SWITCH TERMINALS

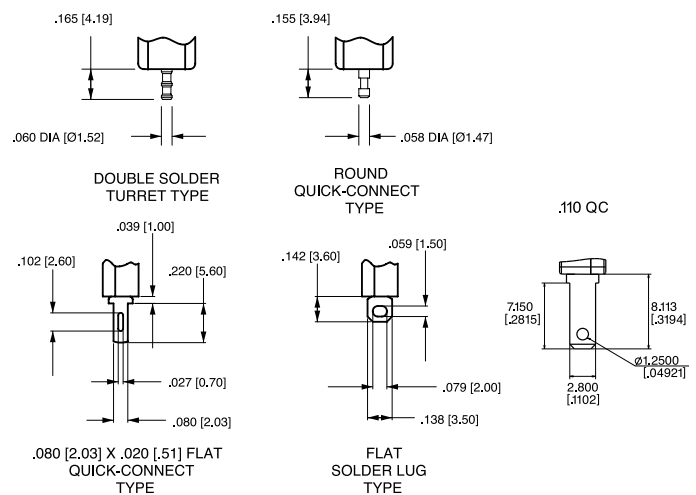





## Dimensional Specifications: in. [mm]

### PADDLE ACTUATOR STYLE


#### SINGLE POLE

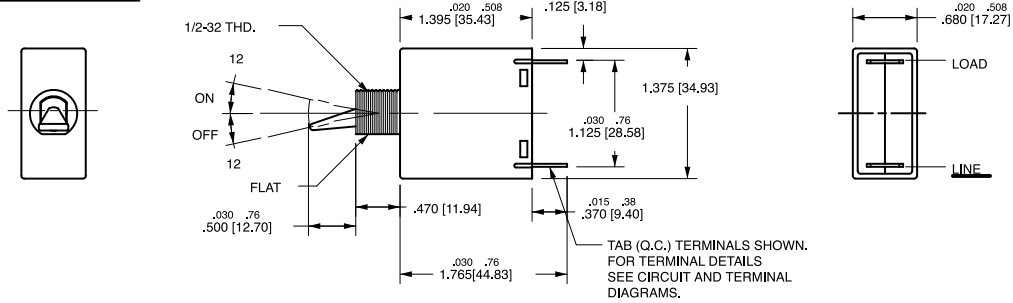


#### DOUBLE POLE

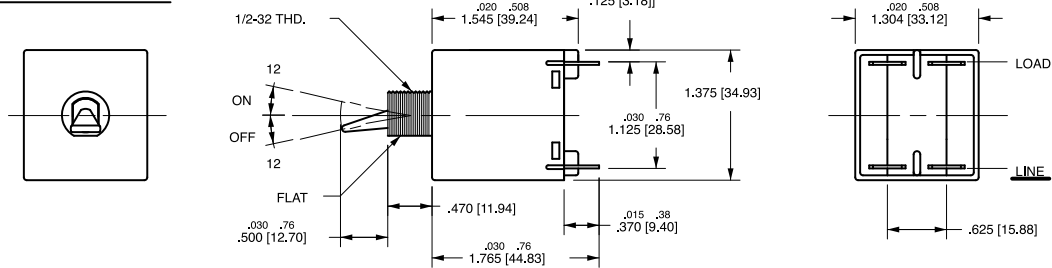


### BATON ACTUATOR STYLE

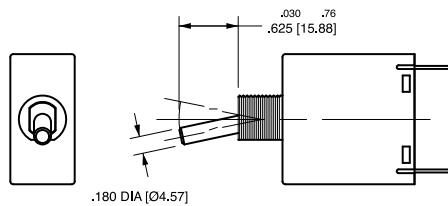


### MOUNTING DETAILS

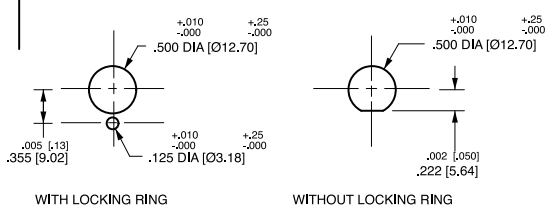

### LEGEND PLATES

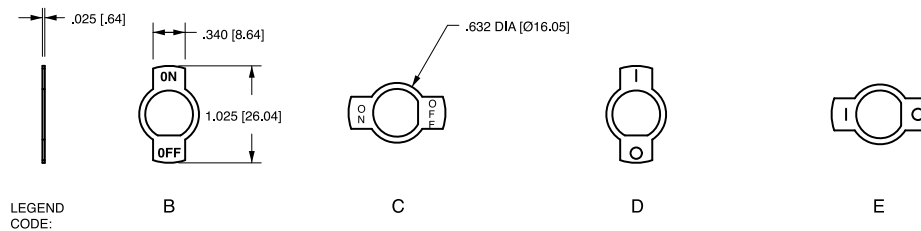


### PANEL HARDWARE

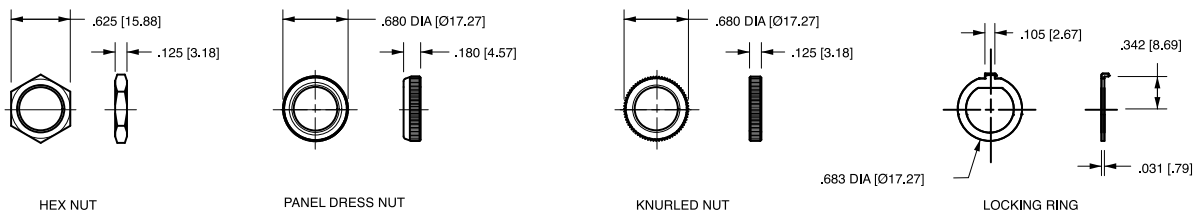

#### Notes:

- 1 All dimensions are in inches [millimeters].
- 2 Tolerance  $\pm 0.020$  [.51] unless otherwise specified.

## Circuit & Terminal Diagrams: in. [mm]

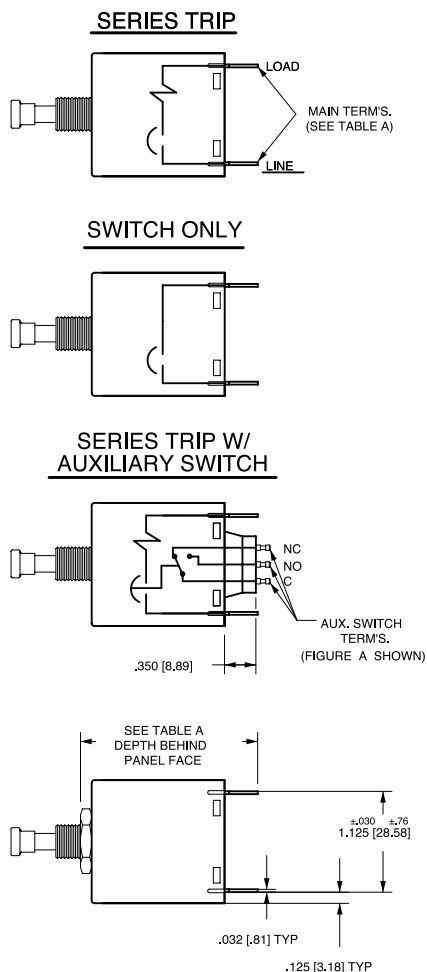

| TABLE A              |                           |                           |
|----------------------|---------------------------|---------------------------|
| TERMINAL DESCRIPTION |                           | DEPTH BEHIND PANEL FACE * |
| MAIN                 | TAB (Q.C.)                | 1.952 [49.57]             |
|                      | SCREW (#8-32)             | 1.992 [50.60]             |
|                      | PUSH-IN STUD              | 2.582 [65.58]             |
| AUX. **<br>SWITCH    | DOUBLE SOLDER TURRET TYPE | 2.097 [53.26]             |
|                      | ROUND Q.C TYPE            | 2.087 [53.01]             |
|                      | FLAT QUICK-CONNECT        | 2.191 [55.65]             |
|                      | FLAT SOLDER LUG           | 2.074 [52.68]             |

\*DEPTH INCLUDES BEHIND PANEL HEX NUT AS SUPPLIED ON ALL UNITS.

\*\*WHEN CALLED FOR ON MULTI-POLE UNITS, ONLY ONE AUX. SWITCH IS NORMALLY SUPPLIED, MOUNTED AS SHOWN IN FIG. A

### MULTI-POLE IDENTIFICATION SCHEME

SOLDER TURRET AND ROUND QC AUX SWITCH TERMINALS




FIG. A

FLAT QC AND SOLDER LUG AUX SWITCHTERMINALS





FIG. B


Notes:

- 1 All dimensions are in inches [millimeters].
- 2 Tolerance  $\pm .020$  [.51] unless otherwise specified.

### TERMINAL DIMENSIONAL DETAIL

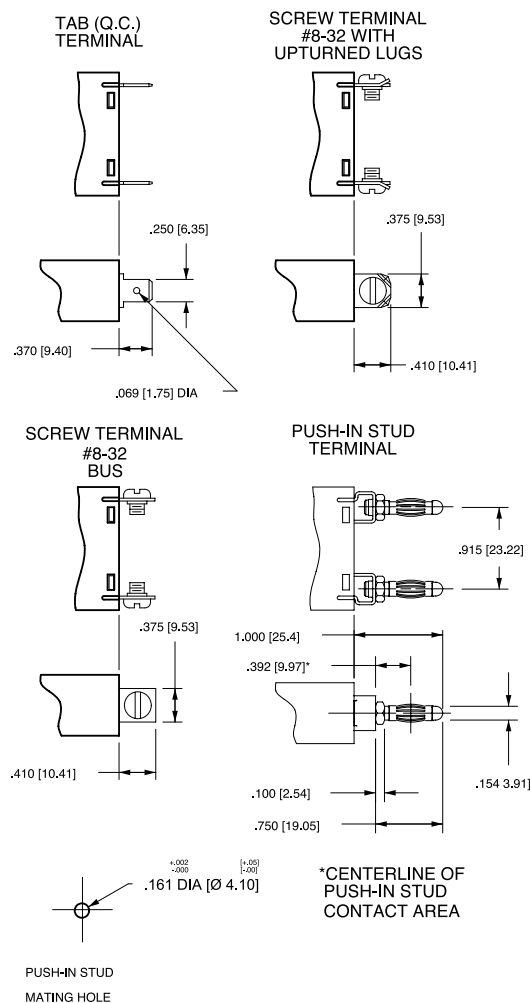


### AUXILIARY SWITCH TERMINALS

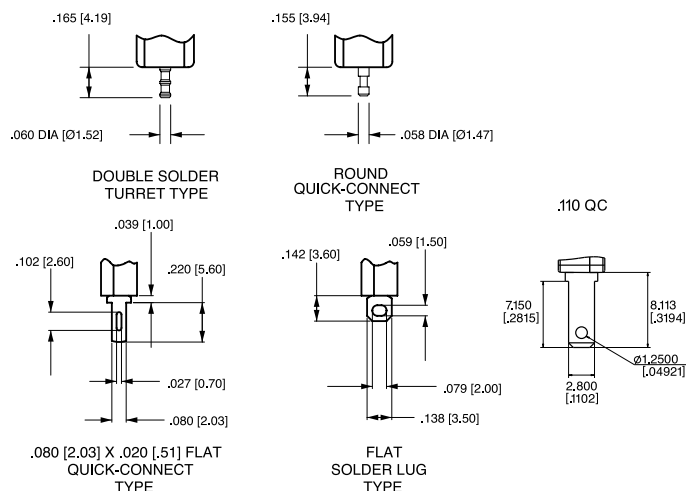

\*AVAILABLE THROUGH SPECAL CATALOG PART NUMBER

## Dimensional Specifications: in. [mm]

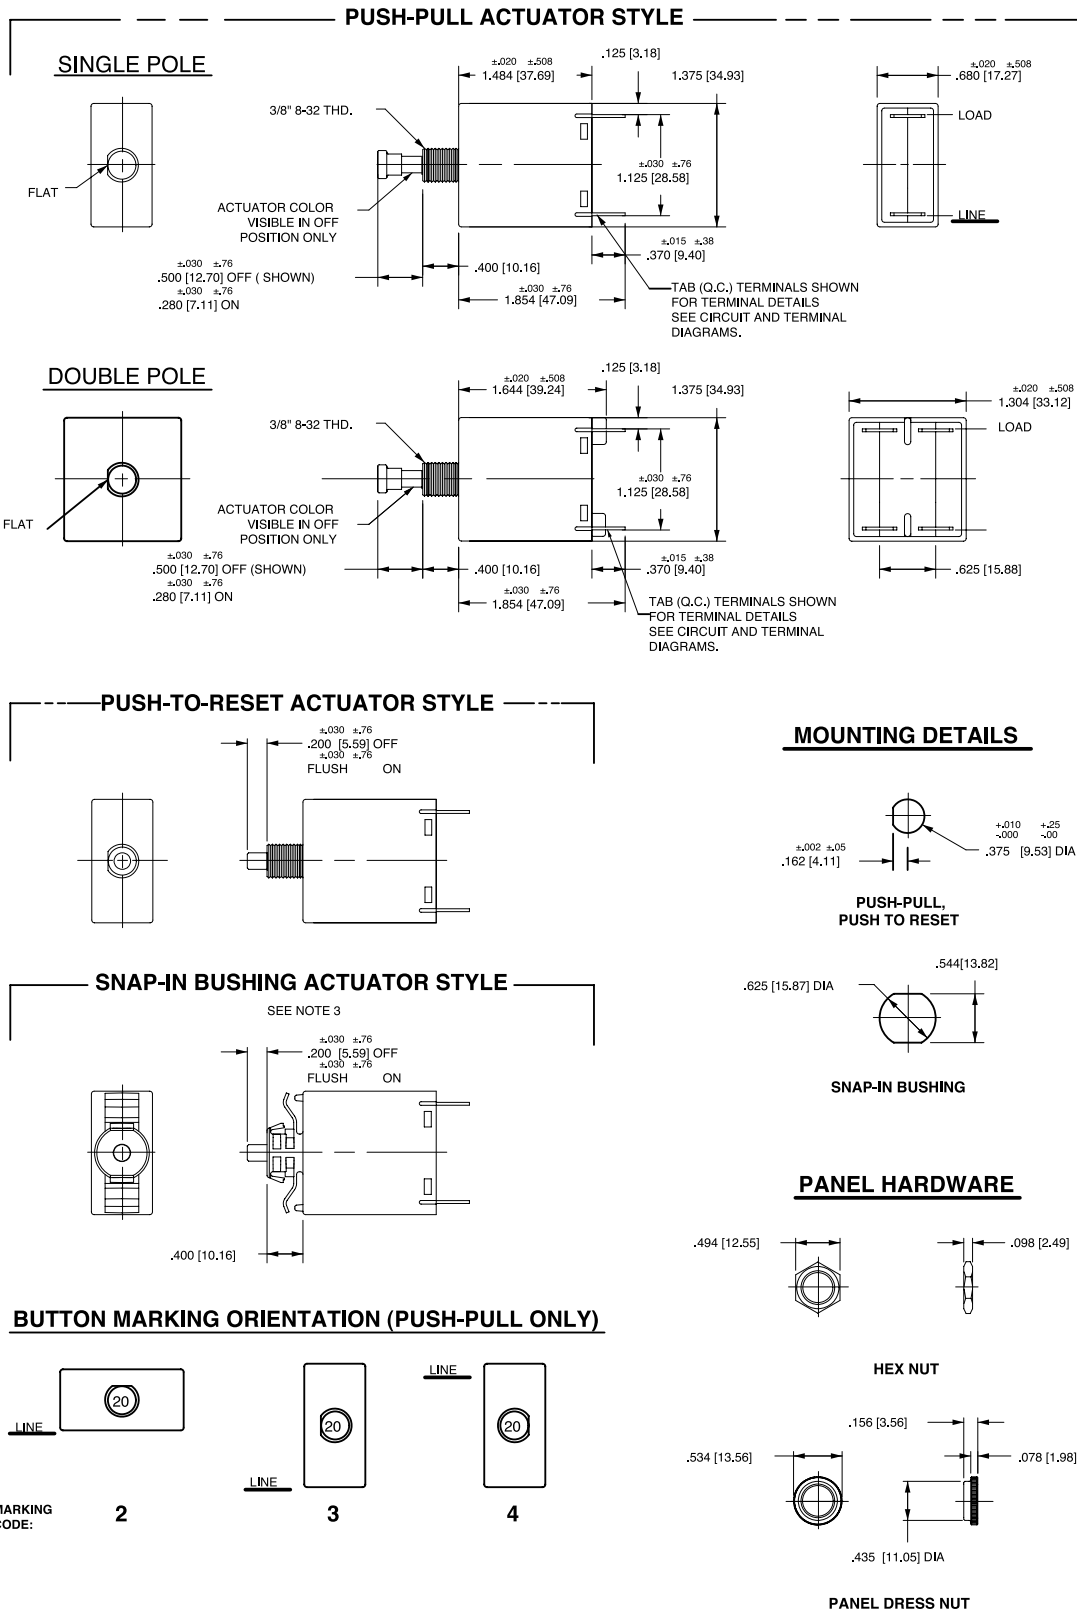

**Notes:**

- 1 All dimensions are in inches [millimeters].
- 2 Tolerance  $\pm 0.20$  [.51] unless otherwise specified.
- 3 Available with Push-Pull or Push-to-Reset Actuators




| M, MS-SERIES TIME DELAY VALUES |                          |         |             |             |             |             |             |             |             |             |
|--------------------------------|--------------------------|---------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| TRIP<br>TIME<br>SECONDS        | PERCENT OF RATED CURRENT |         |             |             |             |             |             |             |             |             |
|                                | Delay                    | 100%    | 135%        | 150%        | 200%        | 400%        | 600%        | 800%        | 1000%       | 1200%       |
|                                | 10, 20, 30               | No Trip | May Trip    | .100 Max    | .100 Max    | .100 Max    | .100 Max    | .100 Max    | .100 Max    | .100 Max    |
|                                | 12, 22, 32, 62, 72, 92   | No Trip | .300 - 7.00 | .200 - 5.00 | .100 - 2.00 | .030 - .500 | .008 - .300 | .006 - .150 | .005 - .100 | .005 - .100 |
|                                | 14, 24, 34, 64, 74, 94   | No Trip | 3.00 - 70.0 | 2.00 - 40.0 | 1.00 - 15.0 | .100 - 4.00 | .008 - 2.00 | .006 - .800 | .005 - .350 | .005 - .160 |

## Notes:


- 1 Delay Curves 12, 14, 22, 24, 32, 34, 62, 64, 72, 74, 92, 94: Breakers to hold 100% and must trip at 135% of rated current and greater within the time limit shown in this curve.
- 2 Delay Curves 10, 20, 30: Breakers to hold 100% and must trip at 150% of rated current and greater within the time limit shown in this curve.
- 3 All Curves: Curve data shown represents breaker response at ambient temperature of 77°F (25°C) with no preloading. Breakers are mounted in standard wall-mount position.
- 4 The minimum inrush pulse tolerance handling capability is 12 times the rated current on standard delays and 18 times the rated current on high inrush delays. These values are based on a 60 Hz 1/2 cycle, 8.33 ms pulse. High inrush delays should be specified for applications with high initial surge currents of short duration, such as switching power supplies, highly capacitive loads and transformer loads.

## Dual Rated AC/DC


## Instantaneous

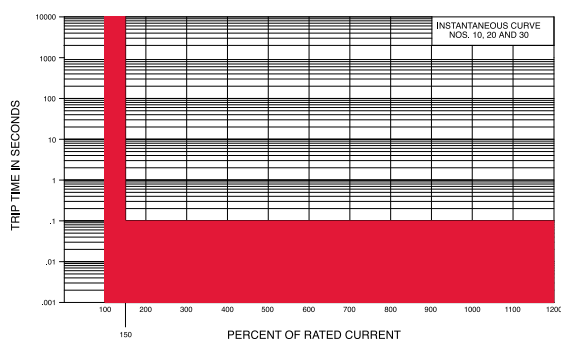


## Short

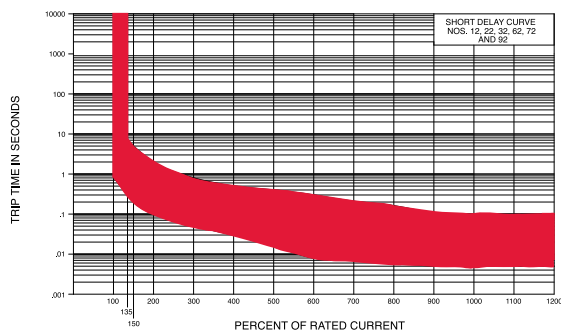


## Short D2

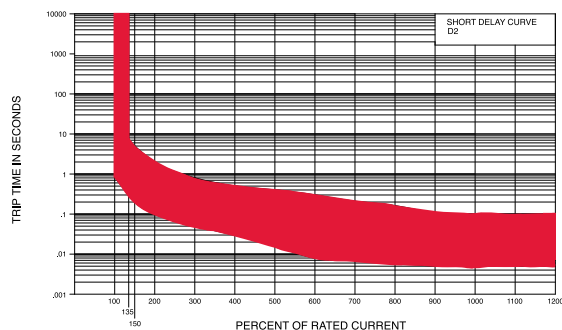

## Medium

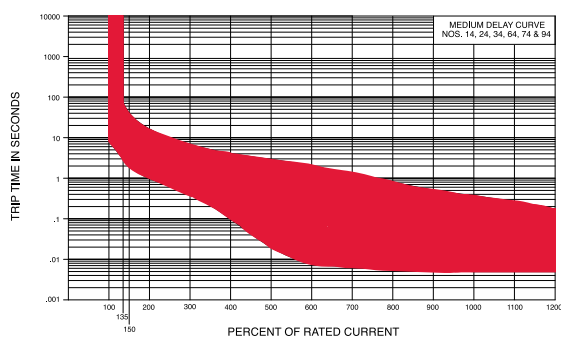

## Medium D4

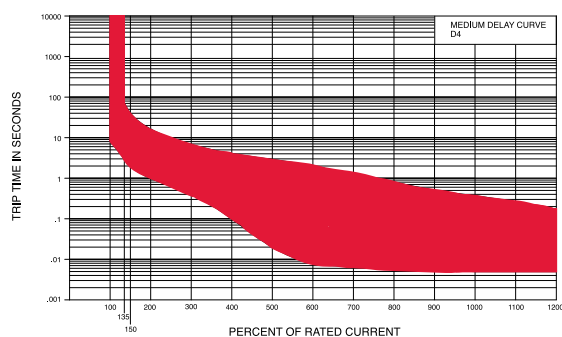

## Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit [www.carlingtech.com/findarep](http://www.carlingtech.com/findarep).



## About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With four ISO registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit [www.carlingtech.com/company-profile](http://www.carlingtech.com/company-profile).

To view all of Carling's environmental, quality, health & safety certifications please visit [www.carlingtech.com/environmental-certifications](http://www.carlingtech.com/environmental-certifications)

## **Worldwide Headquarters**

Carling Technologies, Inc.  
60 Johnson Avenue, Plainville, CT 06062  
**Phone:** 860.793.9281 **Fax:** 860.793.9231  
**Email:** sales@carlingtech.com

**Northern Region Sales Office:** nrsm@carlingtech.com  
**Southeast Region Sales Office:** sersm@carlingtech.com  
**Midwest Region Sales Office:** mrsm@carlingtech.com  
**West Region Sales Office:** wrsm@carlingtech.com  
**Latin America Sales Office:** larsm@carlingtech.com

## **Asia-Pacific Headquarters**

Carling Technologies, Asia-Pacific Ltd.,  
Suite 1607, 16/F Tower 2, The Gateway,  
Harbour City, 25 Canton Road,  
Tsimshatsui, Kowloon, Hong Kong  
**Phone:** Int + 852-2737-2277 **Fax:** Int + 852-2736-9332  
**Email:** sales@carlingtech.com.hk

**Shenzhen, China:** shenzhen@carlingtech.com  
**Shanghai, China:** shanghai@carlingtech.com  
**Pune, India:** india@carlingtech.com  
**Kaohsiung, Taiwan:** taiwan@carlingtech.com  
**Yokohama, Japan:** japan@carlingtech.com

## **Europe | Middle East | Africa Headquarters**

Carling Technologies LTD  
4 Airport Business Park, Exeter Airport,  
Clyst Honiton, Exeter, Devon, EX5 2UL, UK  
**Phone:** Int + 44 1392.364422 **Fax:** Int + 44 1392.364477  
**Email:** ltd.sales@carlingtech.com

**Germany:** gmbh@carlingtech.com  
**France:** sas@carlingtech.com



**Carling Technologies®**

Innovative Designs. Powerful Solutions.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Carling Technologies:

[MD1-B-34-410-1-A13-2-C](#) [MD1-B-34-420-1-A13-2-C](#) [MD1-B-34-430-1-A13-2-C](#) [MD1-B-34-440-1-A13-2-C](#) [MD1-B-34-450-1-A13-2-C](#) [MD1-B-34-460-1-A13-2-C](#) [MA1-B-10-430-1-A22-B-T](#) [MA1-B-24-465-1-A26-B-C](#) [MA1-9-14-630-1-A26-2-J](#) [MA1-9-22-275-1-A26-2-D](#) [MA1-A-03-612-1-A11-A-C](#) [MA1-A-03-615-1-A25-B-C](#) [MA1-B-10-450-1-A22-B-J](#) [MA1-B-10-460-1-A16-2-J](#) [MA1-B-10-460-1-A16-2-N](#) [MA1-B-10-460-2-A36-B-E](#) [MA1-B-10-475-1-A22-2-J](#) [MA1-B-10-610-1-A22-2-J](#) [MA1-B-10-610-1-A22-B-J](#) [MA1-B-10-615-1-A22-B-J](#) [MA1-B-10-615-3-A22-2-J](#) [MA1-B-10-615-A-A16-B-J](#) [MA1-B-10-620-1-A22-B-J](#) [MA1-B-10-620-1-A26-7-J](#) [MA1-B-10-620-A-A16-B-J](#) [MA1-B-10-625-1-A22-B-J](#) [MA1-B-10-630-1-A33-B-J](#) [MA1-B-10-630-A-A16-B-J](#) [MA1-B-12-450-1-A26-2-E](#) [MA1-B-12-450-1-A26-2-J](#) [MA1-B-12-610-1-A26-2-J](#) [MA1-B-12-610-2-A22-2-C](#) [MA1-B-12-616-1-A26-2-J](#) [MA1-B-12-620-2-A22-2-C](#) [MA1-B-12-630-1-A36-2-J](#) [MA1-B-12-630-2-A22-B-T](#) [MA1-B-14-210-1-A27-B-J](#) [MA1-B-14-260-1-A12-B-T](#) [MA1-B-14-410-1-A16-2-J](#) [MA1-B-14-410-1-A27-B-M](#) [MA1-B-14-410-1-A87-2-D](#) [MA1-B-14-430-1-A26-2-J](#) [MA1-B-14-430-2-A26-2-M](#) [MA1-B-14-440-1-A26-7-J](#) [MA1-B-14-445-1-A12-B-T](#) [MA1-B-14-450-1-A12-B-T](#) [MA1-B-14-450-1-A16-B-C](#) [MA1-B-14-450-1-A26-2-E](#) [MA1-B-14-450-2-A22-B-C](#) [MA1-B-14-480-1-A26-7-J](#) [MA1-B-14-485-1-A12-B-T](#) [MA1-B-14-490-1-A12-B-T](#) [MA1-B-14-610-1-A16-1-J](#) [MA1-B-14-610-1-A22-2-J](#) [MA1-B-14-610-1-A22-2-M](#) [MA1-B-14-610-2-A22-2-C](#) [MA1-B-14-610-3-A26-2-N](#) [MA1-B-14-614-1-A12-B-T](#) [MA1-B-14-615-2-A26-2-M](#) [MA1-B-14-616-3-A26-2-J](#) [MA1-B-14-616-3-A36-2-C](#) [MA1-B-14-620-1-A26-2-C](#) [MA1-B-14-620-2-A26-2-J](#) [MA1-B-14-620-3-A16-2-J](#) [MA1-B-14-620-3-A26-2-J](#) [MA1-B-14-620-A-A16-2-J](#) [MA1-B-14-625-1-A16-2-J](#) [MA1-B-14-625-1-A87-2-C](#) [MA1-B-14-625-2-A17-B-J](#) [MA1-B-14-625-3-A16-2-J](#) [MA1-B-14-625-3-A26-2-J](#) [MA1-B-14-625-3-A36-B-J](#) [MA1-B-14-630-1-A27-2-J](#) [MA1-B-14-630-2-A21-B-M](#) [MA1-B-14-630-3-A16-2-J](#) [MA1-B-20-517-1-A16-B-E](#) [MA1-B-22-275-1-A26-2-D](#) [MA1-B-22-410-1-A17-A-E](#) [MA1-B-22-410-1-A27-B-E](#) [MA1-B-22-425-1-A17-A-E](#) [MA1-B-22-425-1-A27-B-E](#) [MA1-B-22-440-2-A36-B-E](#) [MA1-B-22-517-1-A16-B-E](#) [MA1-B-22-630-1-A26-2-C](#) [MA1-B-22-630-1-A36-B-C](#) [MA1-B-24-260-1-A26-2-C](#) [MA1-B-24-410-1-A26-B-C](#) [MA1-B-24-410-1-A26-B-E](#) [MA1-B-24-420-1-A26-B-C](#) [MA1-B-24-460-1-A26-2-C](#) [MA1-B-24-460-1-A26-2-D](#) [MA1-B-24-460-1-A26-A-C](#) [MA1-B-24-460-1-A26-B-C](#) [MA1-B-24-460-3-A26-B-C](#) [MA1-B-24-465-1-A26-B-D](#) [MA1-B-24-610-1-A26-2-C](#) [MA1-B-24-610-3-A26-2-E](#) [MA1-B-24-612-1-A27-B-E](#) [MA1-B-24-614-1-A16-A-E](#) [MA1-B-24-615-1-A21-2-C](#)