

preliminary

Schottky Diode

$$V_{RRM} = 200 \text{ V}$$


$$I_{FAV} = 300 \text{ A}$$

$$V_F = 0.91 \text{ V}$$

High Performance Schottky Diode
 Low Loss and Soft Recovery
 Single Diode


Part number

DSA300I200NA

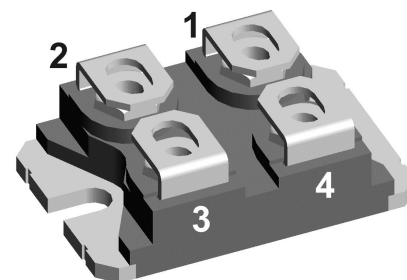

Backside: Isolated

 E72873



Features / Advantages:

- Very low V_f
- Extremely low switching losses
- Low I_{rm} values
- Improved thermal behaviour
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching

Applications:

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Package: SOT-227B (minibloc)

- Isolation Voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Base plate: Copper internally DCB isolated
- Advanced power cycling


Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Schottky				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				200	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				200	V
I_R	reverse current, drain current	$V_R = 200\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			3	mA
		$V_R = 200\text{ V}$	$T_{VJ} = 150^{\circ}\text{C}$			30	mA
V_F	forward voltage drop	$I_F = 300\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			1.03	V
		$I_F = 600\text{ A}$				1.29	V
		$I_F = 300\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			0.91	V
		$I_F = 600\text{ A}$				1.22	V
I_{FAV}	average forward current	$T_C = 95^{\circ}\text{C}$ rectangular $d = 0.5$	$T_{VJ} = 150^{\circ}\text{C}$			300	A
V_{F0}	threshold voltage	} for power loss calculation only		$T_{VJ} = 150^{\circ}\text{C}$		0.57	V
r_F	slope resistance					1.03	mΩ
R_{thJC}	thermal resistance junction to case					0.15	K/W
R_{thCH}	thermal resistance case to heatsink				0.1		K/W
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$				830	W
I_{FSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}; V_R = 0\text{ V}$	$T_{VJ} = 45^{\circ}\text{C}$			4.80	kA
C_J	junction capacitance	$V_R = 24\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		2.22		nF

Package SOT-227B (minibloc)				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal ¹⁾				150	A
T_{VJ}	virtual junction temperature			-40		150	°C
T_{op}	operation temperature			-40		125	°C
T_{stg}	storage temperature			-40		150	°C
Weight					30		g
M_D	mounting torque			1.1		1.5	Nm
M_T	terminal torque			1.1		1.5	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	10.5	3.2			mm
$d_{Spb/Apb}$		terminal to backside	8.6	6.8			mm
V_{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	3000			V
		t = 1 minute		2500			V

¹⁾ I_{RMS} is typically limited by the pin-to-chip resistance (1); or by the current capability of the chip (2). In case of (1) and a product with multiple pins for one chip-potential, the current capability can be increased by connecting the pins as one contact.

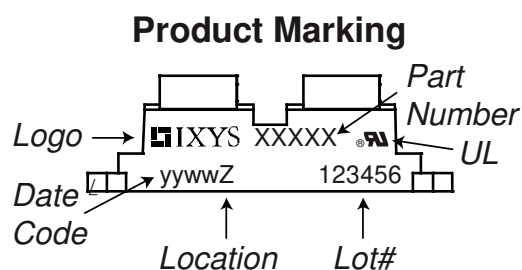

Part description

D = Diode
 S = Schottky Diode
 A = low VF
 300 = Current Rating [A]
 I = Single Diode
 200 = Reverse Voltage [V]
 NA = SOT-227B (minibloc)


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSA300I200NA	DSA300I200NA	Tube	10	511258


Similar Part	Package	Voltage class
DSA300I45NA	SOT-227B (minibloc)	45
DSA300I100NA	SOT-227B (minibloc)	100

Equivalent Circuits for Simulation


* on die level

$T_{VJ} = 150^{\circ}\text{C}$

		Schottky	
$V_{0\max}$	threshold voltage	0.57	V
$R_{0\max}$	slope resistance *	0.21	mΩ

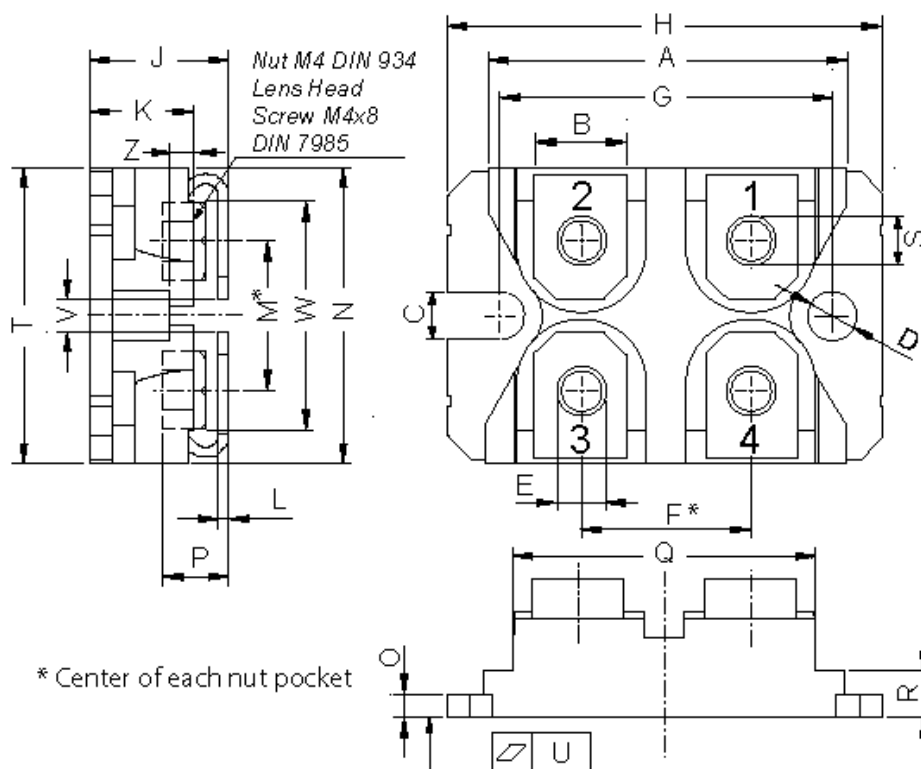Outlines SOT-227B (minibloc)


Dim.	Millimeter		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.167
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106



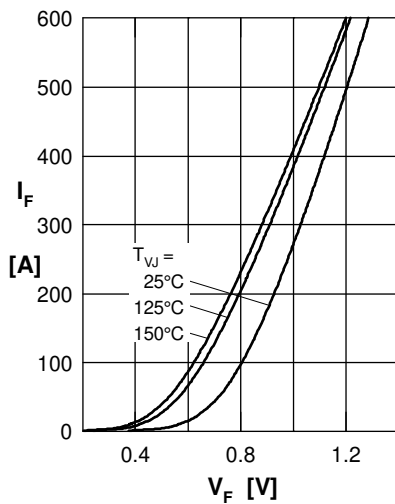
Schottky


Fig. 1 Max. forward voltage drop characteristics

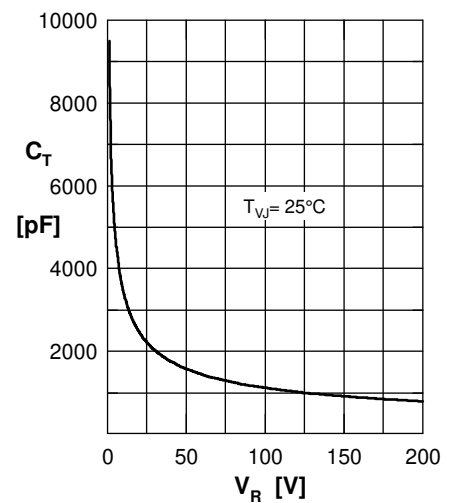
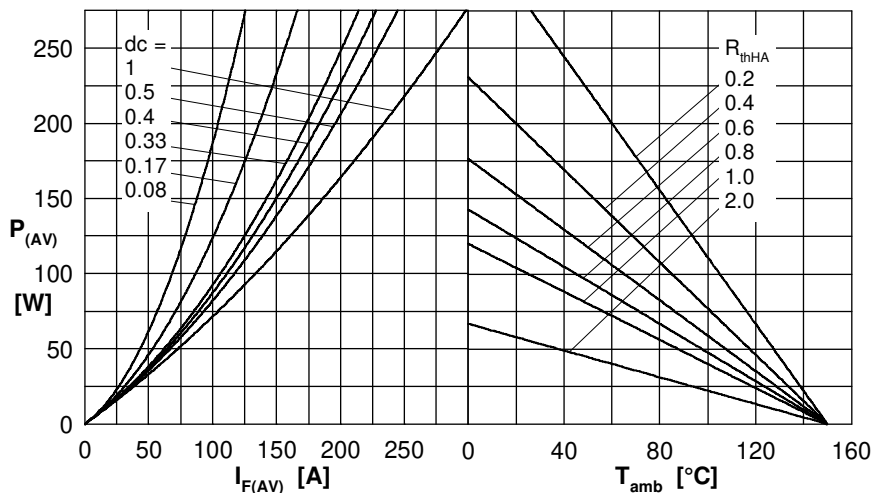
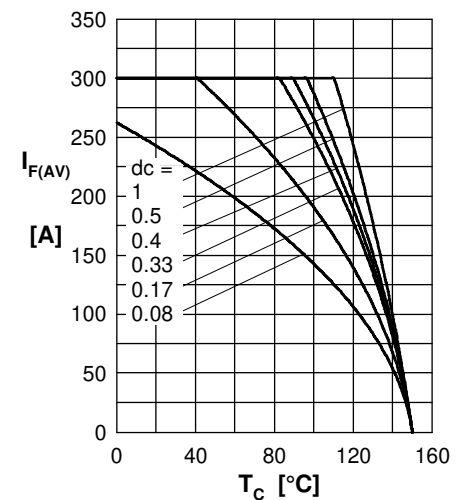
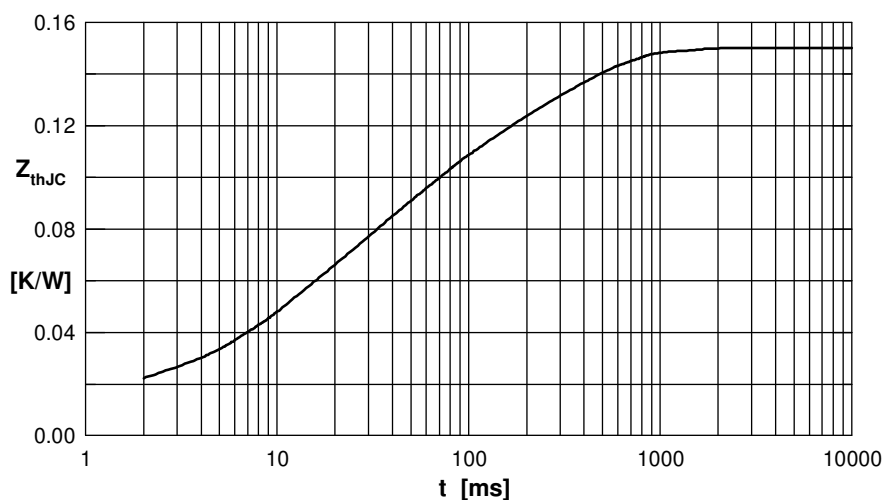
 Fig. 2 Typ. reverse current I_R vs. reverse voltage V_R

 Fig. 3 Typ. junction capacitance C_T vs. reverse voltage V_R

 Fig. 4a Power dissipation versus direct output current
 Fig. 4b and ambient temperature

 Fig. 5 Average forward current $I_{F(AV)}$ vs. case temp. T_C


Fig. 6 Transient thermal impedance junction to case

R_{thi} [K/W]	t_i [s]
0.017	0.01
0.013	0.00001
0.02	0.01
0.05	0.045
0.05	0.3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[DSA300I200NA](#)