

POWR-GARD® Blocks & Holders

LF SERIES CLASS J FUSE BLOCKS

600 V



Description

The Littelfuse 600 V Class J blocks offer generous space savings and enhanced value over previous generations, such as indication, snap-to-release DIN-rail mounting and universal mounting holes.

Features/Benefits

- Space-saving design—up to 45 % smaller
- Universal mounting holes for easy replacement
- Indication offered on all versions except 200–600 A
- One hand release from DIN rail for ferrule style fuses
- Reinforced fuse clips are standard on all Class J blocks
- Covers available for 100 A and lower to enhance safety
- Both hex and slot set screw options available on 30 A and 60 A box lugs

Specifications

Voltage Ratings
Ampere Ratings
Leakage Current
Materials:
Base
Fuse Clip
Box Lug
Pressure Plate
Screw
Flammability Rating
Approvals

600 V
 0–600 A
 <0.6 mA at 600 V

Thermoplastic
 Tin plated copper alloy
 Aluminum
 Zinc plated steel
 Zinc plated steel
 UL 94 V-0
 UL Listed (File: E14721)
 CSA Certified (File: LR7316)
 RoHS Compliant, Lead (Pb) Free
 REACH Compliant

Environmental

Recommended Fuses

Time Delay

Series: JTD_ID
 Series: JTD

Fast Acting

Series: JLS

For information about touch-safe Class J fuse holders, visit:
Littelfuse.com/lfpsj

Web Resources

For sample requests, downloadable CAD drawings, fuse block cover datasheet and other technical information, visit:
Littelfuse.com/fuseblocks
Littelfuse.com/lfj

Ordering Information (Class J 600 V)

AMPERE RATING	POLES	ORDERING NUMBER					TORQUE	TERMINAL	WIRE RANGE	WIRE TYPE		BASE TEMP RATING	DIN RAIL	INDICATION	COVER ORDERING NUMBER*
		BASE PART NUMBER	TERMINAL SUFFIX												
			BOX LUG HEX	BOX LUG SLOT	PRESSURE PLATE	SCREW									
30	1	LFJ600301	CID-HX	CID	PID	SID	2.8 N-m (25 in-lbs)	C	6–14 AWG	CU Only		125 °C	•	•	LFJ60030FBC
	2	LFJ600302	CID-HX	CID	PID	SID		P	10–14 AWG						
	3	LFJ600303	CID-HX	CID	PID	SID		S	10–22 AWG						
60	1	LFJ600601	CID-HX	CID	—	—	5.6 N-m (50 in-lbs)	2–4 AWG		CU-AL		125 °C	•	•	LFJ60060FBC
	2	LFJ600602	CID-HX	CID	—	—	2.8 N-m (25 in-lbs)	6–14 AWG							
	3	LFJ600603	CID-HX	CID	—	—		6–14 AWG							
100	1	LFJ601001	CID	—	—	—	13.6 N-m (120 in-lbs)	2/0–6 AWG		CU-AL	Solid / Stranded	130 °C	—	•	LFJ60100FBC**
	3	LFJ601003	CID	—	—	—	4.5 N-m (40 in-lbs)	8 AWG							
							4.0 N-m (35 in-lbs)	10–14 AWG							
200	1	LFJ602001	C	—	—	—	31.1 N-m (275 in-lbs)	250 kcmil-6		CU-AL		130 °C	—	—	—
	3	LFJ602003	C	—	—	—		250 kcmil-6							
400	1	LFJ604001	C	—	—	—	31.1 N-m (275 in-lbs)	(2) 350 kcmil-1/0		CU-AL		130 °C	—	—	—
	3	LFJ604003	C	—	—	—		(2) 350 kcmil-1/0							
600	1	LFJ606001	C	—	—	—	42.4 N-m (375 in-lbs)	(2) 500 kcmil-4		CU-AL		130 °C	—	—	—
	3	LFJ606003	C	—	—	—		(2) 500 kcmil-4							

Note: Reinforcing springs standard on all Class J fuse blocks.

*Covers sold individually. One cover needed for each pole.


**Cover is not compatible with 70–100 A JLS series fuses

POWR-GARD® Blocks & Holders


LF SERIES CLASS J FUSE BLOCKS

Dimensions mm (inches)


600 V 30 A

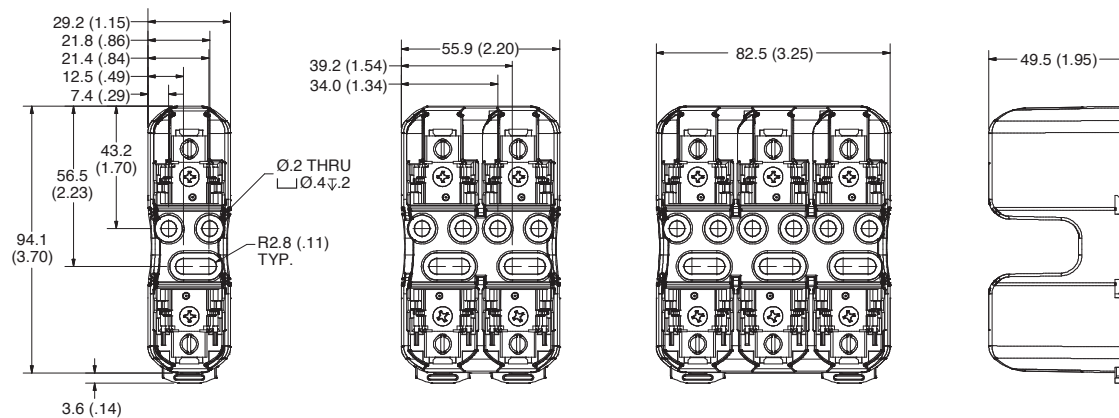

600 V 60 A

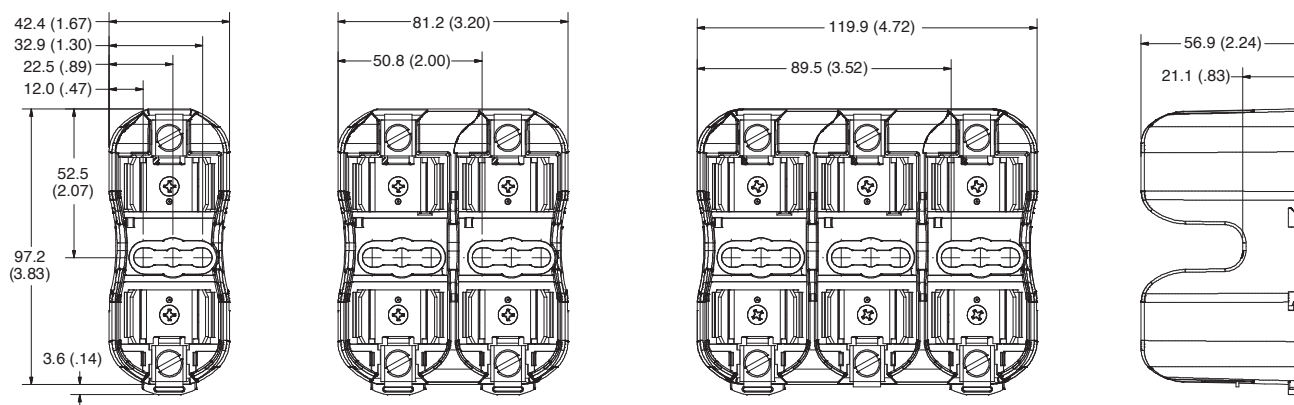

600 V 100 A

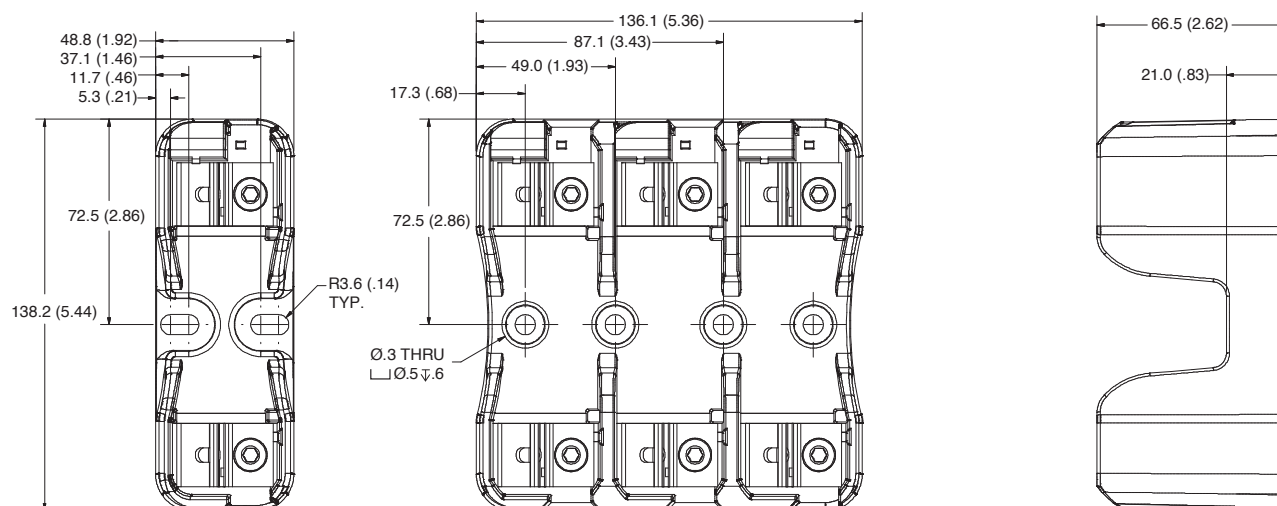


POWR-GARD® Blocks & Holders


LF SERIES CLASS J FUSE BLOCKS

Dimensions mm (inches)


600 V 200 A

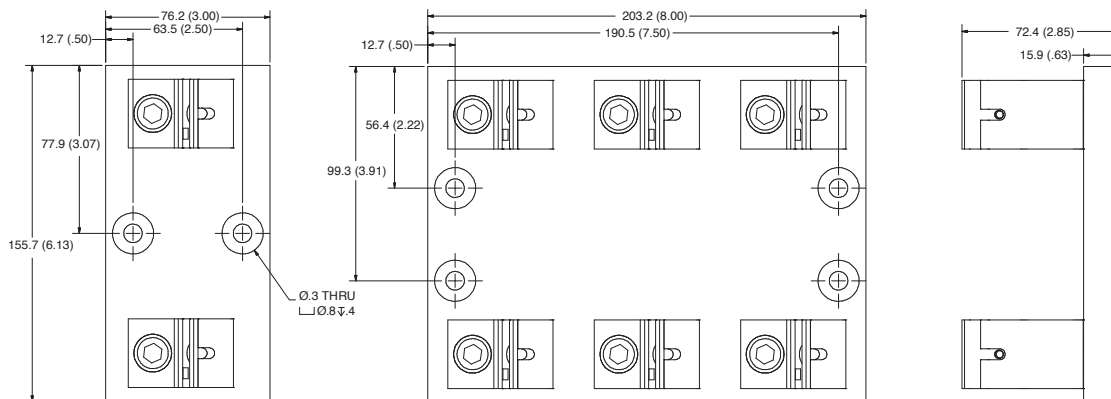

600 V 400 A

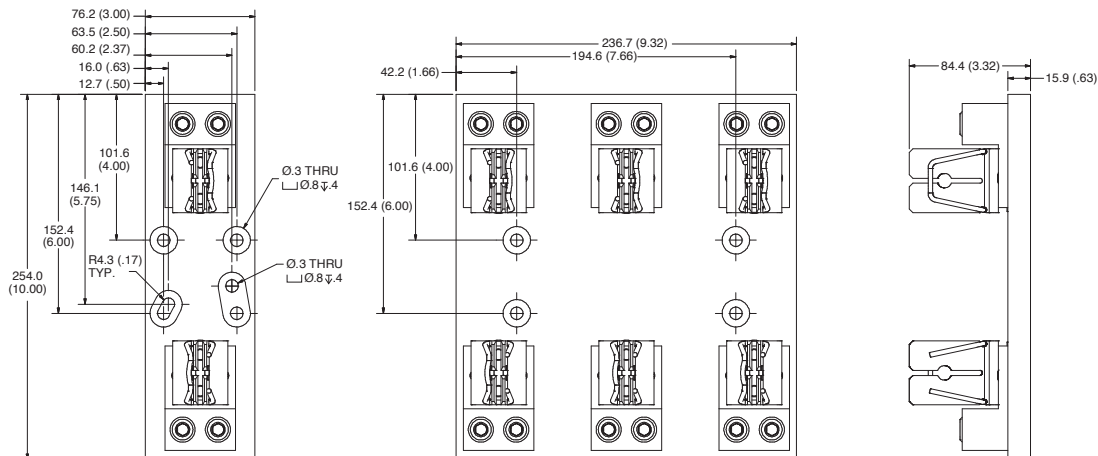

600 V 600 A

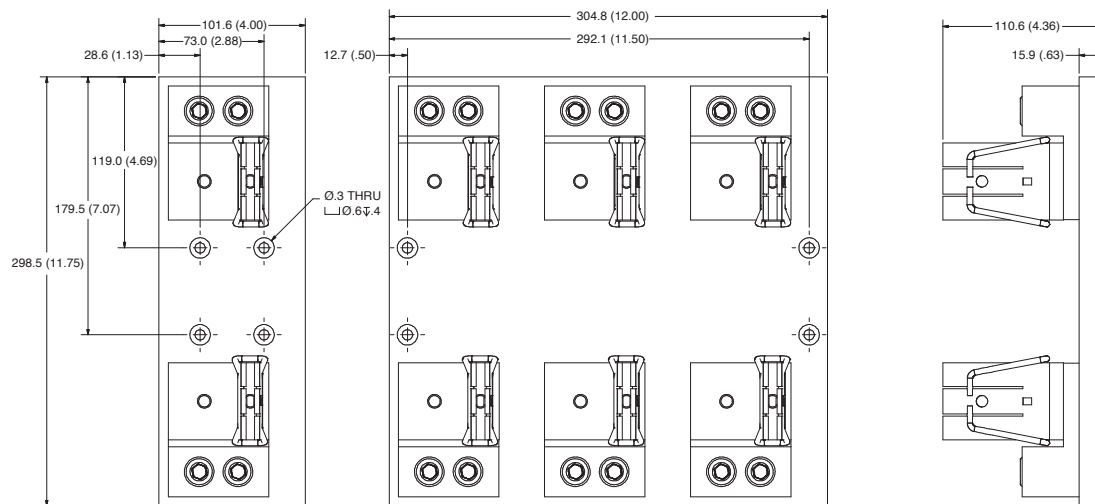

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. **Read complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.**

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[LFJ602001C](#) [LFJ600601CID](#) [LFJ600602CID](#) [LFJ604003C](#) [LFJ604001C](#) [LFJ600301CID](#) [LFJ600303PID](#)
[LFJ600603CID](#) [LFJ601003CID](#) [LFJ600301PID](#) [LFJ600303SID](#) [LFJ602003C](#) [LFJ600301SID](#) [LFJ606003C](#)
[LFJ600302CID](#) [LFJ600302PID](#) [LFJ601001CID](#) [LFJ600302SID](#) [LFJ606001C](#) [LFJ600303CID](#) [LF3J2PAK](#) [LF6J2PAK](#)
[LF6J3PAK](#) [LF3J3PAK](#) [LFJ600303CID-HX](#) [LFJ600603CID-HX](#) [LFJ600301CID-HX](#) [LFJ600302CID-HX](#)
[LFJ600601CID-HX](#) [LFJ600602CID-HX](#)