



155100 Series Twist-Lock In-Line Holders for 3AG/AB Fuses

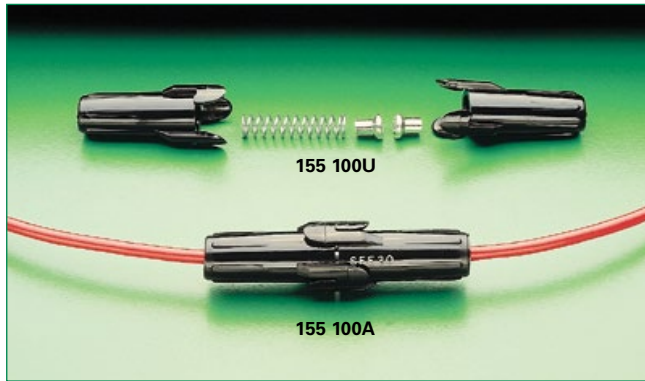

Dimensions

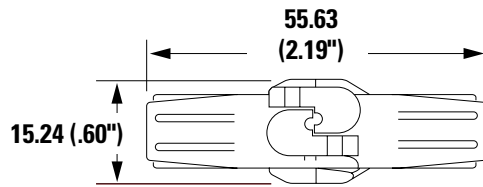

Product Characteristics

Compatible Fuses	For low voltage 3AG/AB or SFE Fuse Applications
Electrical	Intended for use at 32 volts or less with fuses rated up to 20 amperes when the proper spring is installed for fuse size.
Molded Parts	Black Thermoplastic (UL94 V-2). Body halves have a .14" diameter hole for insulated wire.
Ambient Temperature	-40°C to +75°C.
Contact Rivet	Brass. Nickel plating. Designed to accommodate #14 AWG stranded wire.
Assembled	Supplied with 19" loop of #14 AWG red vinyl insulated wire, SFE fuse (listed) with a spring in different lengths depending of the fuse size.
Unassembled	For assembly to #14 AWG wire.
Options	150 215 is similar to 155 120A except no fuse is supplied. It is intended for use with 3AG fuses rated up to 20 amperes.
In-Line Fuseholder	Supplied with a spring in different lengths depending of the fuse size.

* Please refer to Fuseology section for information on proper fuseholder re-rating.

Additional Information



Datasheet



Resources



Samples

Ordering Information

Unassembled			Assembled			Packaging
Ordering Number	Catalog Number	For Fuse Size	Ordering Number	Catalog Number	Fuse Installed	
-	155 100	All below	01550100Z*	-	-	Bulk Pack (100 Pcs)
01550104ZXU	155 104U	¼" × 5/8"	01550104ZXA	155 104A	SFE 4	Bulk Pack (100 Pcs - Assembled) (100 Pcs- Unassembled)
01550106ZXU	155 106U	¼" × ¾"	01550106ZXA	155 106A	SFE 6	Bulk Pack (100 Pcs - Assembled) (100 Pcs- Unassembled)
01550109ZXU	155 109U	¼" × 7/8"	01550109ZXA	155 109A	SFE 9	Bulk Pack (100 Pcs - Assembled) (100 Pcs- Unassembled)
01550114ZXU	155 114U	¼" × 1 1/16"	01550114ZXA	155 114A	SFE 14	Bulk Pack (100 Pcs - Assembled) (100 Pcs- Unassembled)
01550120ZXU	155 120U	¼" × 1 ¼"	01550120ZXA	155 120A	SFE 20	Bulk Pack (100 Pcs - Assembled) (100 Pcs- Unassembled)
-	-	¼" × 1 1/16" ¼" × 1 ¼"	01500215Z	-	-	Bulk Pack (100 Pcs)

* Supplied with 8" loop of #14 AWG red vinyl insulated wire and two springs in different lengths to accommodate SFE sized fuses. (Fuse not included)

** Fuseholders with specific wire sizes and lengths are available on special order.

Warning: Electrical Shock. Power must be disconnected prior to handling fuse.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[01550104ZXA](#) [01550109ZXA](#) [01550120ZXA](#) [01550109ZXU](#) [01550120ZXU](#) [01550106ZXU](#) [01550106ZXA](#)
[01550114ZXA](#) [01550114ZXU](#) [01550100Z](#) [01550104ZXU](#) [01500215Z](#) [01550120HXU](#) [01550100LXN](#) [01550106HXU](#)
[01550100XBP](#)