

281/282 Series Panel Mount Fuseholders for MICRO™/TR3 Fuses

281 Series Panel Mount




Front of Panel Mounting
with Push-On / Rear Retaining Nut

Dimensions units in inch (mm)

0281 0001

Front of Panel Mounting with Push-On / Rear Retaining Nut

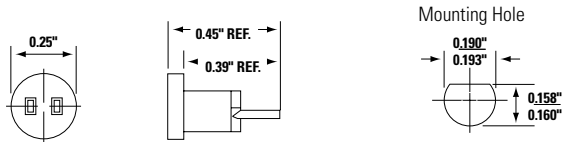

282 Series Panel Mount - Sealed/Moisture Resist Knob

Note: These products are shipped unassembled and without fuse device




Rear of Panel Mounting
with Threaded Knurled /
Front Retaining Nut

Front of Panel Mounting
with Threaded Hex /
Rear Retaining Nut

Dimensions units in inch (mm)


0282 0002 and 0282 0008

Rear of Panel Mounting with Threaded Knurled / Front Retaining Nut

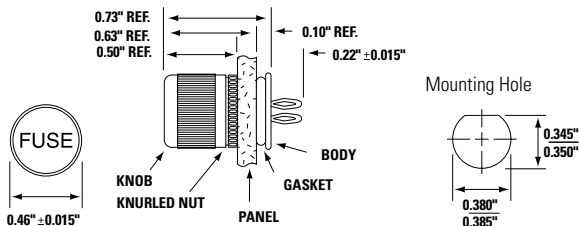

0282 0001 and 0282 0007

Front of Panel Mounting with Threaded Hex / Rear Retaining Nut

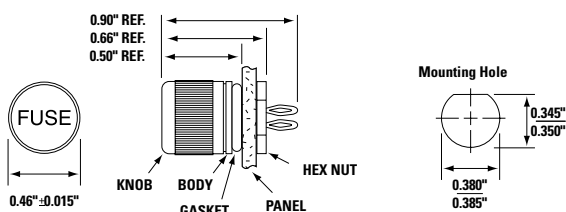

Product Characteristics

Compatible Fuses	MICRO™/TR3
Description	Panel mount holder designed for Littelfuse MICRO™/TR3 type and other fuse series with .025" diameter leads rated to 5 amps
Electrical Specs	Rated at 5 amperes for any voltage up to 125
Mounting Specs	Maximum panel thickness is .09"
Ambient Temp.	-40 °C to +125 °C
Retaining Hardware	"Push-On" retaining nut
Molded Material	Black Thermoset
Terminal Material	Beryllium copper with silver plating

Product Characteristics

Compatible Fuses	MICRO™/TR3
Description	RF-shielded and drip-proof screw-on knob design enables use of Littelfuse MICRO™/TR3 fuses when presence of moisture exists at front of panel-s1
Electrical Specs	Rated at 5 amperes for any voltage up to 125
Mounting Specs	Front panel mount, maximum panel thickness: .093" Rear panel mount, maximum panel thickness: .125"
Ambient Temp.	-40 °C to +125 °C
Mounting Gasket Options	Neoprene (282001, 282002) or Conductive Silicone (282007, 282008)
Retaining Hardware Options	Threaded Hex Nut (282002, 282008) or Threaded Knurled Nut (282001, 282007)
Molded Material	Black thermoset
Housing, Knob and Nut Material	Aluminum, untreated
Terminal Material	Beryllium copper with silver plating
Knob Seal	Buna "N" O-ring inside the knob

Note: Refer to [Fuseology](#) for information on proper fuseholder re-rating.

Additional Information



**Datasheet
281 Series**



**Resources
281 Series**



**Samples
281 Series**



**Datasheet
282 Series**



**Resources
282 Series**



**Samples
282 Series**

Ordering Information

Ordering Number	Packing
02810001H	Bulk (100 Pieces)

Ordering Number		Gasket Type	Packing
Rear Mounting (Threaded Knurled Nut)	Front Mounting (Threaded Hex Nut)		
02820002Z	02820001Z	Neoprene	Bulk (100 Pieces)
02820008Z	02820007Z	Conductive Silicone	Bulk (100 Pieces)

Note: These products are shipped unassembled and without fuse device

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[282001-2](#) [02820002ZXA](#) [02820001ZXA](#)