

M Series Half-inch Rotary Switches

Features/Benefits

- Multi-pole and multi-positions
- Panel and PCB mounting
- Stainless steel actuator
- Non-shorting contacts
- RoHS Compliant
- IP67 (F option only)

Typical Applications

- Test equipment
- Industrial equipment
- Medical equipment



Models Available

Specifications

CONTACT RATING: Q contact material: Carry-6 AMPS continuous. Switch-250 mA max. @ 125 V AC or 28 DC. Non-shorting contacts standard. See page K-16 for additional ratings.

ELECTRICAL LIFE: 10,000 make-and-break cycles at 150 mA, 125 V AC or 28 DC.

CONTACT RESISTANCE: Below 20 mΩ typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE: 10^{10} Ω min.

DIELECTRIC STRENGTH: 600 Vrms min. @ sea level.

OPERATING & STORAGE TEMPERATURE: -30°C to 85°C.

OPERATING TORQUE: 4-7 ounces-inches typ. initial.

SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

NOTE: Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

Materials

HOUSING AND BUSHING: Zinc alloy, bright zinc plated, with clear chromate finish.

ACTUATOR: Zinc alloy, nickel plated or stainless steel.

BASE: Diallylphthalate (DAP) or melamine phenolic, with insert molded terminals.

ROTOR: Glass filled polyester (UL 94V-0).

MOVABLE CONTACTS:
Non-shorting: Q contact material: Copper alloy, silver plated. See page K-16 for additional contact materials.

STATIONARY CONTACT & ALL TERMINALS: Q contact material: Copper alloy, silver plated. All terminals insert molded. All terminals present regardless of number of switch positions. See page K-16 for additional contact materials.

CONTACT SPRING: Music wire, phosphate coated.

STOP PIN: Stainless steel.

STOP RING: Brass.

HARDWARE: Nut: Brass, nickel plated; Lockwasher: Steel, nickel plated.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages K-14 thru K-17. For additional options not shown in catalog, consult Customer Service Center.

<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 2px;"></div> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 2px;"></div> </div>			
Switch Function MA00 SP, 10 pos., 36° MA02 SP, 2 pos., 36° MA03 SP, 3 pos., 36° MA04 SP, 4 pos., 36° MA05 SP, 5 pos., 36° MA06 SP, 6 pos., 36° MA10 SP, 10 pos., 36° MB00 DP, 5 pos., 36° MB03 DP, 3 pos., 36° MB04 DP, 4 pos., 36° MB05 DP, 5 pos., 36° MC00 SP, 12 pos., 30° MC03 SP, 3 pos., 30° MC07 SP, 7 pos., 30° MC12 SP, 12 pos., 30° MD00 DP, 6 pos., 30° MD06 DP, 6 pos., 30° ME00 SP, 10 pos., 36° ME04 SP, 4 pos., 36° MF00 DP, 5 pos., 36° MG00 SP, 12 pos., 30° MH00 DP, 6 pos., 30°		Actuator & Bushing L1 .650" long, flatted L2 Screwdriver slot, flush L3 .650" long, round S1 .650" long, flatted S2 Screwdriver slot, flush S3 .650" long, round S6 .785" long, slot	
		Short/Non-short N Non-shorting contacts	
		Terminations Z Solder lug C PC Thru-hole	
		Contact Material Q Silver G Gold over silver	
		Seal D No seal F Splashproof shaft & panel seal (IP67)	



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change



K

Rotary


M Series

Half-inch Rotary Switches


SWITCH FUNCTION

36° INDEXING			
NO. POLES	MODEL NO. WITH STOP PINS	MODEL NO. WITH STOP RINGS	SWITCH FUNCTION
SP	MA00	ME00	10 Positions No Stops
	MA02	—	2 Positions
	MA03	—	3 Positions
	MA04	ME04	4 Positions
	MA05	—	5 Positions
	MA06	—	6 Positions
	MA10	—	10 Positions
DP	MB00	MF00	5 Positions No Stops
	MB03	—	3 Positions
	MB04	—	4 Positions
	MB05	—	5 Positions


SP MODELS 36° INDEXING SCHEMATIC




DP MODELS 36° INDEXING SCHEMATIC



SP MODELS 30° INDEXING SCHEMATIC






DP MODELS 30° INDEXING SCHEMATIC



30° INDEXING			
NO. POLES	MODEL NO. WITH STOP PINS	MODEL NO. WITH STOP RINGS	SWITCH FUNCTION
SP	MC00	MG00	12 Positions No Stops
	MC03	—	3 Positions
	MC07	—	7 Positions
	MC12	—	12 Positions
DP	MD00	MH00	6 Positions No Stops
	MD06	—	6 Positions

All models  with all options when ordered with S1-S6 stainless steel actuator options.

NOTE: Number of positions or stops preset at factory (NOTE: MX00 models have full 360 rotation with no stops. Stop pins or stop rings supplied for user-selectable stops, see above). All terminals present regardless of number of switch positions. Hardware is available separately, see section "Technical Data and Additional Hardware".

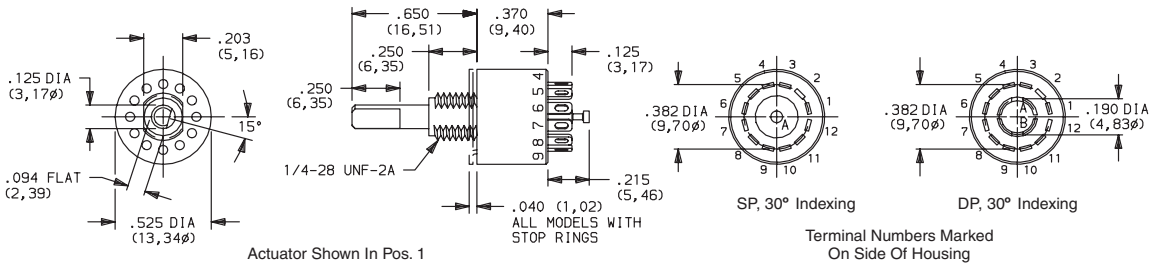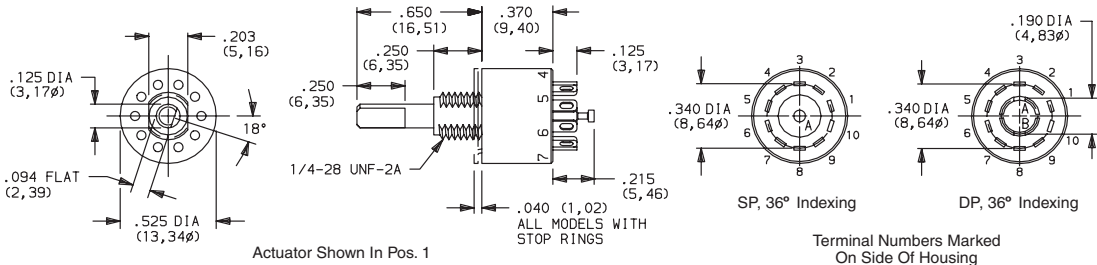


Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

M Series Half-inch Rotary Switches


ACTUATOR (ZINC ALLOY)




L1 .650" LONG, FLATTED

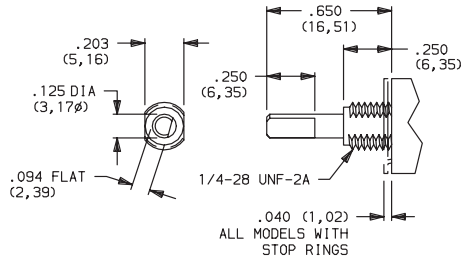

L2 SCREWDRIVER SLOT, FLUSH

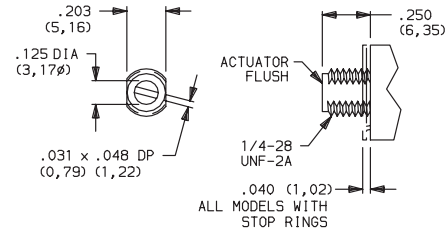

L3 .650" LONG, ROUND

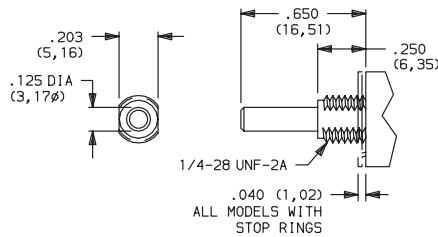


All actuators shown in pos. 1


ACTUATOR (STAINLESS STEEL)




S1 .650" LONG, FLATTED

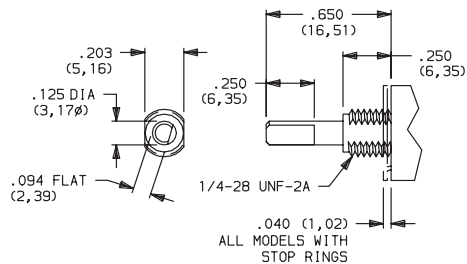


S2 SCREWDRIVER SLOT, FLUSH

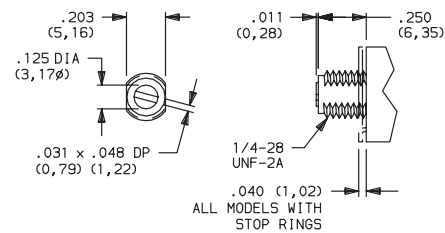

S3 .650" LONG, ROUND

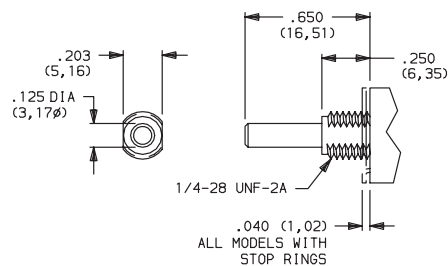

S6 .785" LONG, SLOT

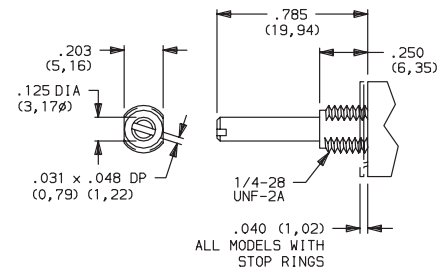

All actuators shown in pos. 1

All models  when ordered with stainless steel actuators.



Third Angle
Projection

Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

M Series Half-inch Rotary Switches

SHORTING/NON-SHORTING CONTACTS



N NON-SHORTING CONTACTS




Break-before-make

TERMINATIONS




Z SOLDER LUG



C PC THRU-HOLE

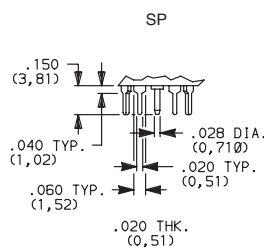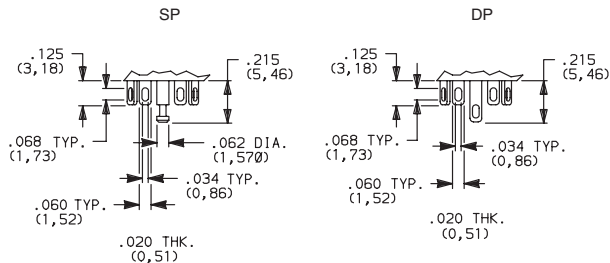



PANEL MOUNTING

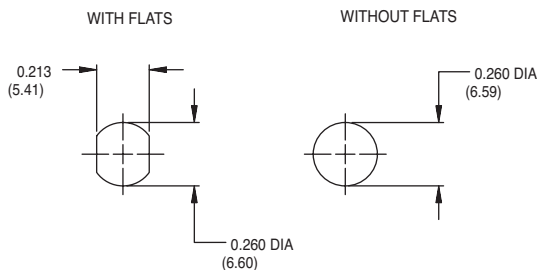

PC MOUNTING 36° INDEXING

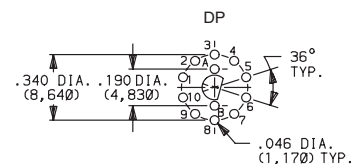

PC MOUNTING 30° INDEXING

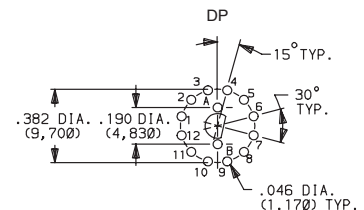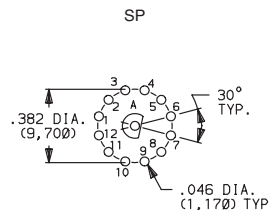

Hardware: All models, one mounting nut and lockwasher supplied standard. MA00 thru MD00 models: two stop pins and adhesive mylar washer supplied. ME00 thru MH00 models: two stop rings supplied. Hardware is available separately, see section "Technical Data and Additional Hardware".

* Will withstand 12 in. - lbs of torque with no distortion.

NOTE: Q contact material standard. Terminal numbers marked on side of housing. All terminals insert molded. All terminals present regardless of number of switch positions.

Actuators and schematics shown in pos. 1.

CONTACT MATERIAL



OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING	RATING	
Q	SILVER ^{1, 2}	SILVER ²	POWER	CARRY: 6 AMPS CONTINUOUS. SWITCH: 250 mA @ 125 V AC or 28 V DC.
G	GOLD OVER SILVER ^{3, 4}	GOLD ⁴	LOW LEVEL/DRY CIRCUIT OR POWER	0.4 VA MAX. @ 20 V AC or DC MAX. or, CARRY: 6 AMPS CONTINUOUS. SWITCH: 250 mA @ 125 V AC or 28 V DC.

* Note: See Technical Data section of this catalog for RoHS compliant and compatible definition and specifications.


¹ MOVABLE CONTACTS: Non-shortng: Copper alloy, silver plated.

² STATIONARY CONTACTS & ALL TERMINALS: Copper alloy, silver plated.

³ MOVABLE CONTACTS: Non-shortng: Copper alloy, with gold plate over nickel plate, over silver plate.

⁴ STATIONARY CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate over silver plate.

NOTE: Any models supplied with Q, G contact material are RoHS compliant.

All models  when ordered with S1-S6 stainless steel actuator options.



Third Angle
Projection

Dimensions are shown: Inch (mm)

Specifications and dimensions subject to change




M Series Half-inch Rotary Switches

SEAL 

D NO EPOXY SEAL

F SPLASHPROOF SHAFT AND PANEL SEAL
IP67 approved

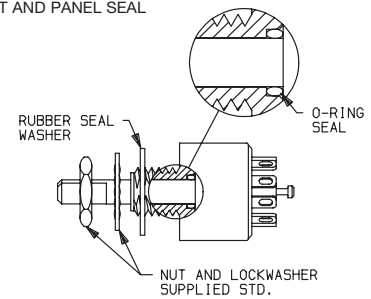

Setting Stops With Stop Pins

MA00, MB00, MC00 & MD00 Models Only:




The number of switch positions or stops are adjustable by means of stop pins provided with each switch. Switches are normally shipped with stop pins and hardware in bulk, not installed. Without stop pins, switches have full 360° rotation and no stops. Note that all two pole models begin to repeat when actuated 180° or more.

To set stops, refer to figures 1 & 2. Orient switch so that terminal no. 1 is as shown. Turn actuator to position 1, using flats on bushing and terminal no. 1 as reference. Install CCW stop pin in hole designated 'X'. Install second stop pin in hole number corresponding to the number of positions desired. Note that two pole models will begin to repeat when actuated 180° or more. To retain stop pins, use adhesive mylar washer included; see figure 3.

All models except MX00 models have number of switch positions or stops pre-set at factory and are not adjustable.

Hardware:

Two stop pins, mounting nut, and lockwasher supplied standard.

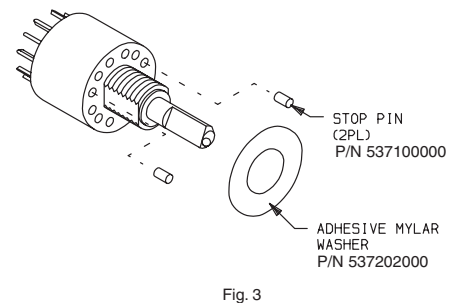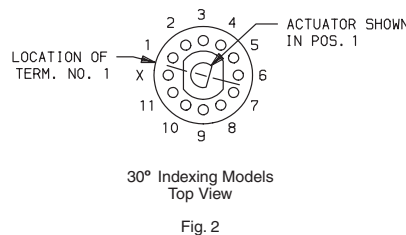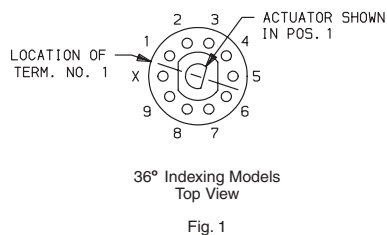

Setting Stops With Stop Rings

ME00, MF00, MG00 & MH00 Models Only:

The number of switch positions or stops are adjustable by means of stop rings provided with each switch. These models are normally shipped with stop rings and hardware in bulk, not installed. Without stop rings, switches have full 360° rotation and no stops. Note that all two pole models begin to repeat when actuated 180° or more.




To set stops refer to figures 4 & 5. Orient switch so that terminal no. 1 is as shown. Turn actuator to pos. 1 using flats on bushing and terminal no. 1 as reference. See figure 6 and install inner stop ring with short tab in hole designated 'X'. Install outer stop ring with long tab in hole number corresponding to the number of positions desired. Note that all two pole models begin to repeat when actuated 180° or more. Use mounting nut and lockwasher to retain stop rings.

All MEXX, MFXX, MGXX & MHXX Models (Except MX00 models):

Number of switch positions or stops are preset at factory, but are user adjustable.

Hardware:

Two stop rings, mounting nut and lockwasher supplied standard.

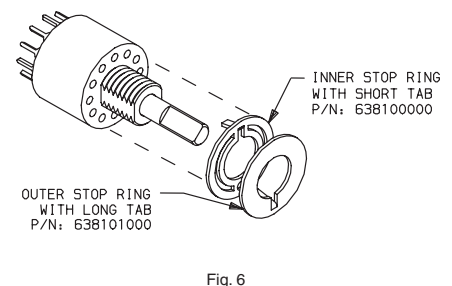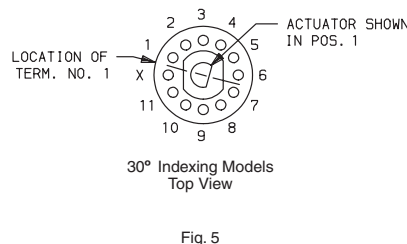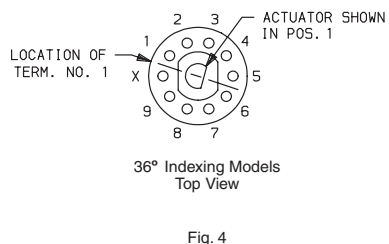

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Switches:

MA05L1NZQD	MA00L3NZQD	MG00L1NCQD	MA00L1NCQD	MF00L1NZQD	MB00S2NZGF	MG00L1NZQD
MC00L1NCQD	MA04S1NZQF	MA05S1NZGF	MA05L2NCQD	MB03L1NZQF	MB05S1NZQD	MB03L1NZQD
MA04S6NCGD	MB00L2NZQD	MD00L1NZQF	MF00L1NZGD	ME00L1NCQD	MB00L1NZQD	MD00L1NZQD
MH00L1NZQD	MA00L1NZQD	ME00L1NZQD	MB00L1NCQD	MA00L1NCGF	MA00L1NCQF	MA00L1NZGD
MA00L2NCQD	MA00L3NCGD	MA00L3NCGF	MA00L3NCQD	MA00L3NZGD	MA00S1NCGF	MA00S1NCQD
MA00S1NZGD	MA00S1NZQD	MA00S2NCGD	MA00S3NCQD	MA00S3NCQF	MA00S3NZGF	MA00S3NZQD
MA00S3NZQF	MA02L2NZQD	MA02L3NZQD	MA02S1NZGD	MA02S1NZGF	MA02S3NCQD	MA02S3NZQD
MA03L1NCGF	MA03L1NCQD	MA03L1NZGD	MA03L1NZQD	MA03S1NCGD	MA03S1NZGF	MA03S3NZQD
MA04L1NCGD	MA04L1NCQD	MA04L1NZQD	MA04L2NCQD	MA04L2NZGF	MA04L2NZQD	MA04S1NCGD
MA04S1NCGF	MA04S1NZGF	MA04S2NCGF	MA04S3NCQD	MA04S3NZGD	MA04S3NZQD	MA04S3NZQF
MA05L1NCGD	MA05L1NCQD	MA05L1NZGD	MA05L1NZGF	MA05S1NCGF	MA05S1NCQD	MA05S3NCGF
MA06L1NZGF	MA06L1NZQD	MA06S1NCGD	MA06S2NCGD	MA06S2NZQF	MA06S3NCQD	MA10L1NCQF
MA10L3NCGD	MA10L3NCQD	MA10S1NCGD	MA10S2NCGD	MA10S3NCQD	MA10S3NCQF	MA10S3NZQD
MA10S6NCGD	MB00L1NCGD	MB00L1NZGD	MB00L1NZQF	MB00L3NCGD	MB00L3NCQD	MB00S1NCQD
MB00S3NZQD	MB03L1NCQD					