

314/324 Series Lead-free 3AB, Fast-Acting Fuse



Description

The 3AB Fast-Acting Fuse with ceramic body construction permits higher interrupting ratings and voltage ratings. Ideal for applications where high current loads are expected.

Features

- In accordance with UL Standard 248-14
- Available in cartridge and axial lead format and with various forming dimensions
- RoHS compliant and Lead-free
- UL Listed and Recognized to UL/CSA/NMX 248-1 and UL/CSA/NMX 248-14
- Conforms to DENAN's Appendix 3
- Conforms to EN 60127-1 and EN 60127-7 (15A, 20A only)

Agency Approvals

Agency	Agency File Number	Ampere Range
	E10480	0.375A - 15A
	29862	0.375A - 20A
	E10480	20A - 40A
	314 Series: NBK030805-E10480A NBK030805-E10480C NBK030805-E10480E NBK260106-JP1021A 324 Series: NBK030805-E10480B NBK030805-E10480D NBK030805-E10480F NBK260106-JP1021B	1A - 3.5A 4A - 5A 6A - 15A 20A - 30A 1A - 3.5A 4A - 5A 6A - 15A 20A - 30A
	SU05001-6003 SU05001-6001 SU05001-7006 SU05001-8002 SU05001-8003 SU05001-6002	3A 4-6A 7-10A 12-15A 20A 25-30A
	N/A	0.375A - 30A
	J 50440217	*15A/*20A

* - Approved for axial leaded version only.

Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

Electrical Characteristics for Series

% of Ampere Rating	Ampere Rating	Opening Time
100%	0.375 - 40	4 hours, Minimum
135%	0.375 - 30	1 hour, Maximum
200%	0.375 - 12	15 secs., Maximum
	15 - 30	30 secs., Maximum
250%	40	30 secs., Maximum

Additional Information



**Datasheet
314 Series**



**Resources
314 Series**



**Samples
314 Series**



**Accessories
314 & 324
Series**



**Datasheet
324 Series**



**Resources
324 Series**



**Samples
324 Series**

For recommended fuse accessories for this product series, see ["Recommended Accessories" section](#).

Electrical Specification by Item

Amp Code	Ampere Rating (A)	Voltage Rating (V)	Interrupting Rating*	Nominal Cold Resistance (Ohms)	Nominal Melting I²t (A² sec)***	Agency Approvals						
									  			
.375	0.375	250	35 A @ 250 VAC 10 kA @ 125 VAC 10 kA @ 125 VDC	0.820	0.210	x	x	-	-	-	x	-
.500	0.5	250		0.500	0.639	x	x	-	-	-	x	-
.750	0.75	250		0.250	2.061	x	x	-	-	-	x	-
001.	1	250	100 A @ 250 VAC	0.189	0.690	x	x	-	-	x	x	-
002.	2	250	10 kA @ 125 VAC	0.0700	5.700	x	x	-	-	x	x	-
003.	3	250	10 kA @ 125 VDC	0.0432	14.6	x	x	x	-	x	x	-
004.	4	250	750 A @ 250 VAC 10 kA @ 125 VAC 10 kA @ 125 VDC	0.0470	10.4	x	x	x	-	x	x	-
005.	5	250		0.0300	26.0	x	x	x	-	x	x	-
006.	6	250		0.0240	45.0	x	x	x	-	x	x	-
007.	7	250		0.0187	71.0	x	x	x	-	x	x	-
008.	8	250		0.0153	105	x	x	x	-	x	x	-
010.	10	250		0.0105	206	x	x	x	-	x	x	-
010.*	10	280		0.0105	206	-	-	-	x	-	x	-
012.	12	250		0.00760	570	x	x	x	-	x	x	-
015.	15	250		0.00505	292	x	x	x	-	x	x	x****
015.*	15	280		0.00505	292	-	-	-	x	-	x	-
020.	20	250		0.00355	631	-	x	x	x	x	x	x****
020.*	20	280	1000 A @ 250 VAC 200 A @ 300 VAC 10 kA @ 125 VAC 10 kA @ 125 VDC	0.00355	631	-	-	-	x	-	x	-
025.	25	250	100 A @ 250 VAC 1000 A @ 75 VDC 400 A @ 125 VAC 400 A @ 125 VDC	0.00235	1450	-	-	x	x	x	x	-
025.**	25	280		0.00235	1450	-	-	-	x	-	x	-
030.	30	250		0.00182	2490	-	-	x	x	x	x	-
040.	40	250	1000 A @ 250 VAC 400 A @ 150 VDC	0.0014	22925	-	-	-	x	-	x	-

* 350A@280VAC interrupting rating available for 10A, 15A and 20A.


** 50A@280VAC for 25A. Add suffix '280'. Example: 0324020.MX280P.

***t test at 10x rated current

****A Approved for axial leaded versions only, and interrupting rating is 750A@250Vac for 15A, 1000A@250Vac for 20A

+ - Interrupting Rating may differ based on Agency Approval. See Agency Approval certificate for more details.


Temperature Re-rating Curve

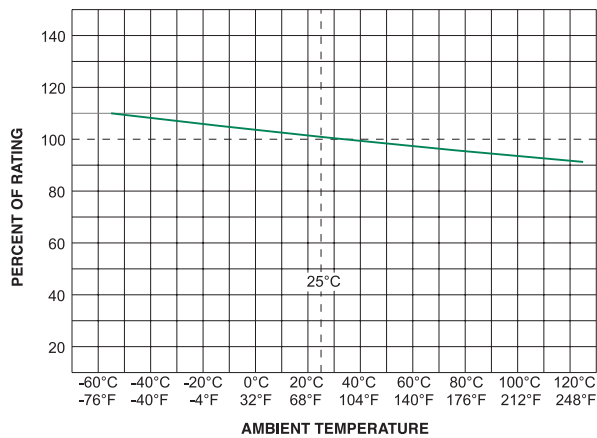


Note:

Derating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

Average Time Current Curves

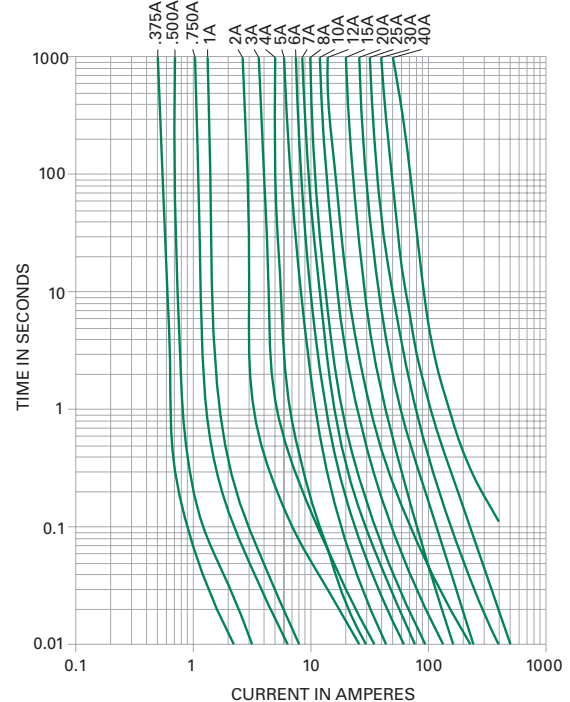

Soldering Parameters - Wave Soldering

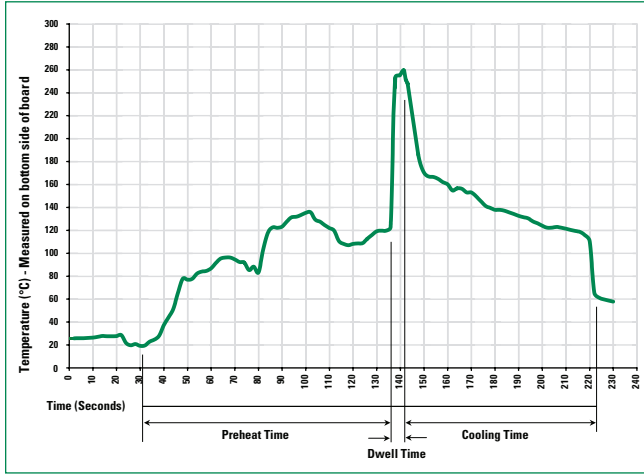

Recommended Process Parameters:

Wave Parameter	Lead-Free Recommendation
Preheat: (Depends on Flux Activation Temperature)	(Typical Industry Recommendation)
Temperature Minimum:	100°C
Temperature Maximum:	150°C
Preheat Time:	60-180 seconds
Solder Pot Temperature:	260°C Maximum
Solder Dwell Time:	2-5 seconds

Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350°C +/- 5°C
Heating Time: 5 seconds max.


Note: These devices are not recommended for IR or Convection Reflow process.

Product Characteristics

Materials	Body: Ceramic Cap: Nickel-plated Brass Leads: Tin-plated Copper
Terminal Strength	MIL-STD-202, Method 211, Test Condition A
Solderability	MIL-STD-202 Method 208
Product Marking	Cap1: Brand logo, current and voltage ratings Cap2: Series and agency approval marks


Operating Temperature	-55°C to +125°C
Thermal Shock	MIL-STD-202, Method 107, Test Condition B (5 cycles, -65°C to +125°C)
Vibration	MIL-STD-202, Method 201
Humidity	MIL-STD-202, Method 103, Test Condition A (High RH (95%) and Elevated temperature (40°C) for 240 hours)
Salt Spray	MIL-STD-202, Method 101, Test Condition B

Dimensions

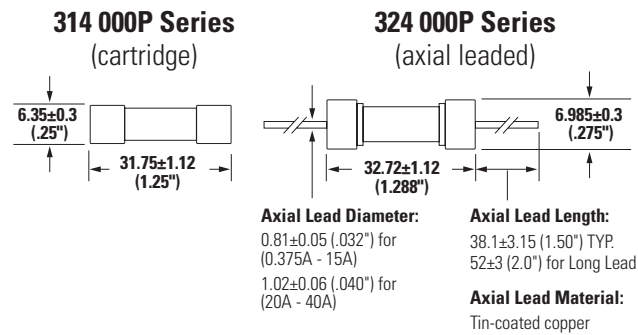

Measurements displayed in millimeters (inches)

Part Numbering System

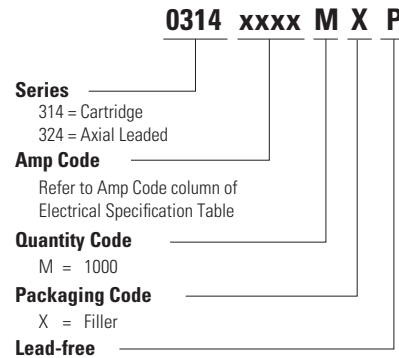

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Taping Width
314 Series				
Bulk	N/A	5	VX	N/A
Bulk	N/A	100	HX	N/A
Bulk	N/A	1000	MX	N/A
Bulk	N/A	1000	MX52L (long lead)	N/A
Bulk	N/A	1000	MXCC	N/A
Bulk	N/A	1000	MX52LE (long lead)	N/A
324 Series				
Bulk	N/A	5	VX	N/A
Bulk	N/A	100	HX	N/A
Bulk	N/A	1000	MX	N/A
Bulk	N/A	1000	MX280	N/A
Bulk	N/A	1000	MX52L	N/A
Bulk	N/A	1000	MXF24	N/A

Recommended Accessories

Accessory Type	Series	Description	Max Application Voltage	Max Application Amperage
Holder	155100	Twist-Lock In-Line Fuseholder	32	20
	342	Traditional Panel Mount Fuseholder	250	20
	346	Panel Mount Flip-Top Shock-Safe Fuseholder	250	15
	345	Shock-Safe Fuseholder with PC Mount, Solder Mount and Panel Mount options	250	20
Block	354	Low Profile OMNI-BLOK® Fuse Block	600	30
	359	High Current Screw Terminal Fuse Block		30
Clip	122	High Current Traditional PC Board Fuse Clip	1000	30
	101	Rivet/Eyelet Type Fuse Clip	1000	15

Notes:

1. Do not use in applications above rating.
2. Please refer to fuseholder data sheet for specific re-rating information.
3. Please contact factory for applications greater than the max voltage and amperage shown.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[0324.125MXP](#) [0324025.HXP](#) [0324030.MXP](#) [0324010.HXP](#) [0324.375MXP](#) [0314006.HXP](#) [0314030.HXP](#)
[0314004.HXP](#) [0324.125HXP](#) [0314020.HXP](#) [0324001.MXP](#) [0314006.MXP](#) [0314015.HXP](#) [0324006.HXP](#)
[0324030.HXP](#) [0314.500HXP](#) [0314008.MXP](#) [0324003.MXP](#) [0324006.MXP](#) [0314007.MXP](#) [0314012.HXP](#)
[0314025.MXP](#) [0324007.MXP](#) [0324008.HXP](#) [0324005.HXP](#) [0324025.MXP](#) [0314.125MXP](#) [0324.500HXP](#)
[0324002.MXP](#) [0314.375HXP](#) [0324010.MXP](#) [0314.750HXP](#) [0314.750MXP](#) [0314012.MXP](#) [0324012.HXP](#)
[0314004.MXP](#) [0314010.HXP](#) [0324005.MXP](#) [0324003.HXP](#) [0314025.HXP](#) [0314030.MXP](#) [0314.125HXP](#)
[0324.500MXP](#) [0314025.MX52LP](#) [0324040.MXP](#) [0324012.MXP](#) [0324008.MXP](#) [0324004.HXP](#) [0324015.HXP](#)
[0324001.HXP](#) [0314010.MXP](#) [0314001.MXP](#) [0324.750MXP](#) [0324020.MXP](#) [0324.750HXP](#) [0314.375MXP](#)
[0314005.MXP](#) [0324.250MXP](#) [0324004.MXP](#) [0314.250HXP](#) [0324015.MXP](#) [0314003.HXP](#) [0314008.HXP](#)
[0314.250MXP](#) [0314015.MXP](#) [0314020.MXP](#) [0314001.HXP](#) [0314007.HXP](#) [0324007.HXP](#) [0314.500MXP](#)
[0314002.HXP](#) [0314002.MXP](#) [0324002.HXP](#) [0314003.MXP](#) [0314005.HXP](#) [0324.250HXP](#) [0324.375HXP](#)
[0324020.HXP](#) [0314010.MXANP](#) [0314015.MXANP](#) [0314012.MXANP](#) [0324025.MX280P](#) [0324020.MX280P](#)
[0314002.VXP](#) [0314003.VXP](#) [0314015.VXP](#) [0314.500VXP](#) [0314001.VXP](#) [0314012.VXP](#) [0314010.VXP](#)
[0314008.VXP](#) [0314005.VXP](#) [0314004.VXP](#) [0314006.VXP](#) [0314025.VXP](#) [0314030.VXP](#) [0314020.VXP](#)
[0314.750VXP](#) [0324003.VXP](#) [0324007.VXP](#)