

SAM Series Multiway Switches


NEW

Features/Benefits

- Multi-directional switches
2-way & 4-way
- Actuation force 5.3N or 6N
- Footprint 20.7x18.0 mm (2-way) &
26.2x26.2 mm (4-way)
- Momentary action - SPDT

Typical Applications

- Automotive
- Industrial
- Avionics
- Joystick switch

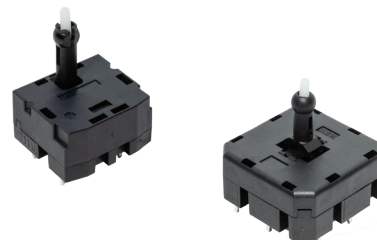

Specifications

FUNCTION: Momentary action.

CONTACT ARRANGEMENT: SPDT per switching circuit

SWITCHING MODE: Non-Shorting

TERMINALS: THT - Through Hole Terminals

Mechanical

P/N	Force (N)	Operating Life (Cycles*)	Travel (mm)
SAM-H2-LR10SPA	6.0±2.0	30,000	1.00±0.4
SAM-H2-LR14SPA	5.3±2.0	30,000	1.25±0.4
SAM-H2-MR14SPA	5.3±2.0	30,000	1.25±0.4
SAM-H4-MR11SPA	6.0±2.0	30,000	1.00±0.4

Notes: * per direction

Electrical

RATING: 15A @ 14V DC

INITIAL CONTACT RESISTANCE: <20mΩ per switching circuit

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC

INSULATION RESISTANCE: >100MΩ

BOUNCE TIME: <10ms

Environmental

OPERATING TEMPERATURE: -40°C to +85°C

STORAGE TEMPERATURE: -40°C to +85°C

SEALING LEVEL: IP30

Process

SOLDERING: Wave compatible

TERMINALS: Silver plated

Materials

HOUSING: Polyamide UL94 HB

COVER: PBT+ASA UL94 HB

ACTUATOR: Polyamide UL94 HB

TERMINAL: Copper alloy, silver plated

CONTACT: Silver alloy

Packaging


720 pieces per box for SAM-H2-LR10SPA & SAM-H2-LR14SPA

540 pieces per box for SAM-H2-MR14SPA

264 pieces per box for SAM-H4-MR11SPA

How To Order

The Build-A Switch concept allows you to mix and match options to create the switch you need. Below is a complete listing of options shown in catalog. To order, simply select desired option from each category and place in the appropriate box.



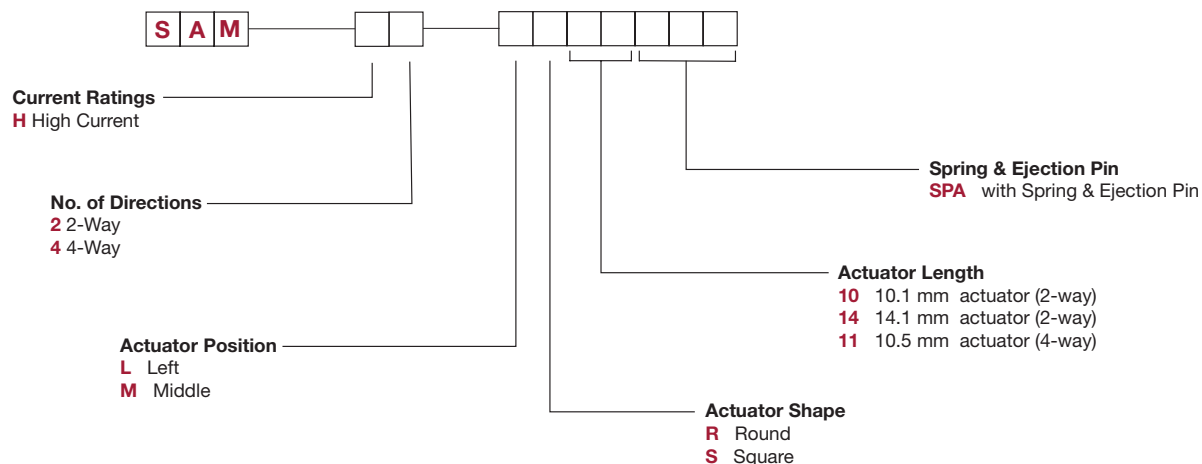


First Angle
Projection




NEW

SAM Series Multiway Switches

SAM-H2-LR10SPA

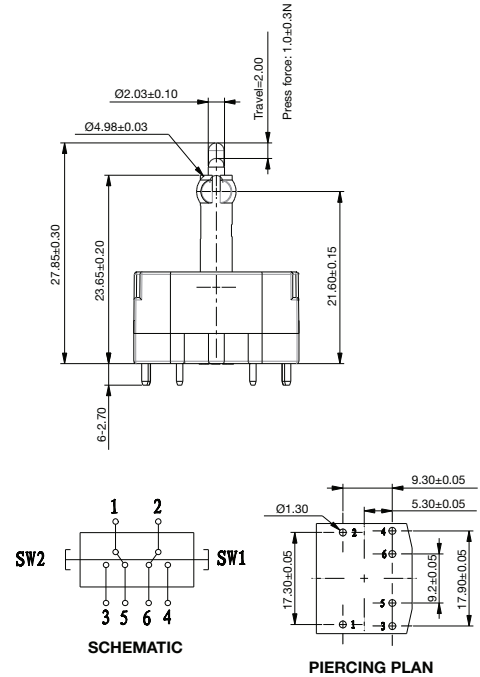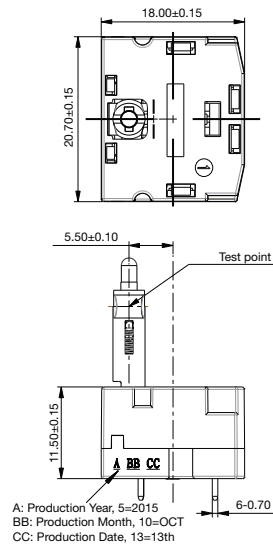

SAM-H2-LR14SPA

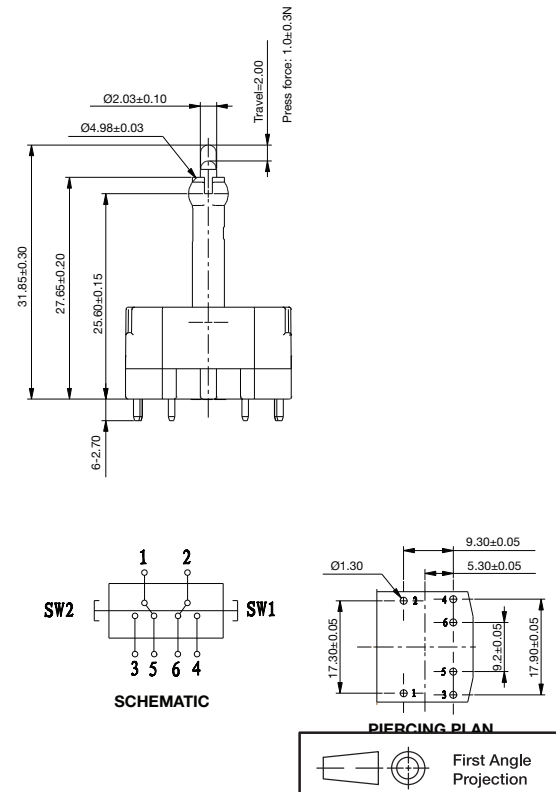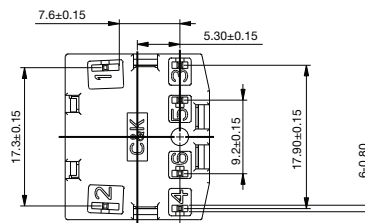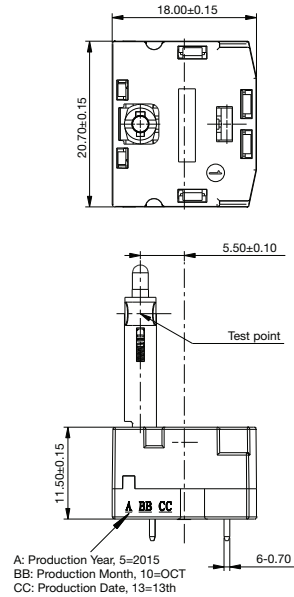


C

Navigation


SAM Series Multiway Switches

NEW

SAM-H2-MR14SPA

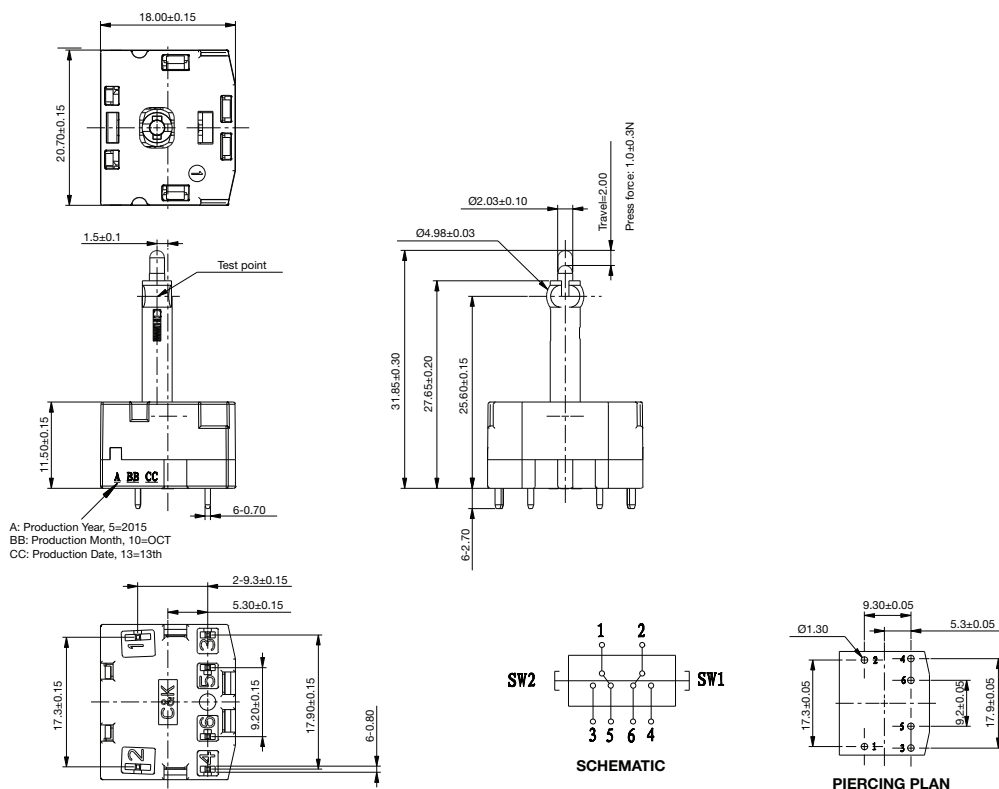

SAM-H4-MR11SPA

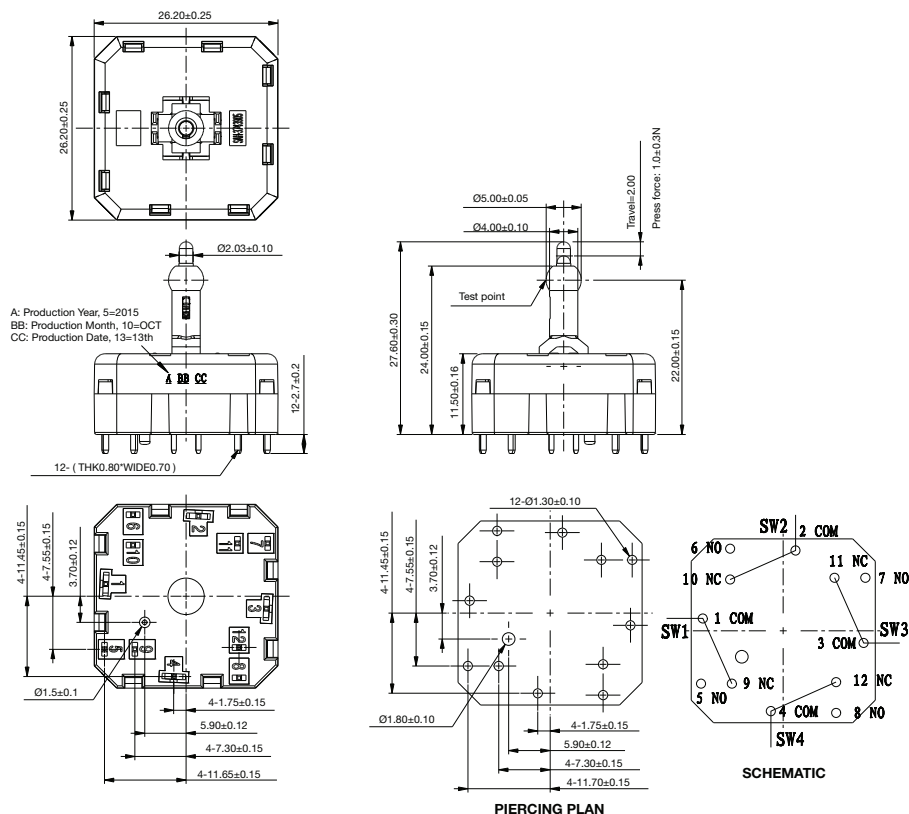

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[C&K Switches:](#)

[SAM-H2-LR10SPA](#) [SAM-H2-LR14SPA](#) [SAM-H2-MR14SPA](#) [SAM-H4-MR11SPA](#)