

SMT LEDs ~ Right Angle ~ LED + Socket Assembly




SMF-HM1530XD-509

T5mm Socket Fault Indicator


Relampable

Mating Option

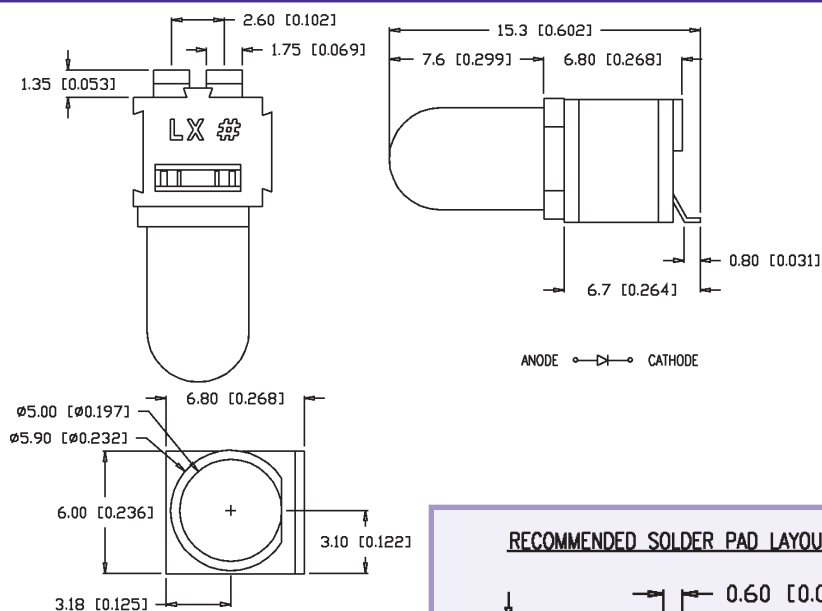

ANODE CATHODE

RECOMMENDED SOLDER PAD LAYOUT

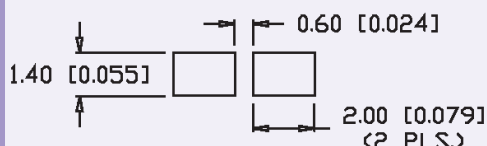

Features/Options

- Uses Standard LEDs on SMT Boards and Eliminates Through Hole Assembly
- Right Angle or Straight Up SMT Socket
- Single Unit or Mated (Up to 5 Units)
- Install Socket Via SMT Assembly Then Install LED of Your Choice
- Replace LEDs as Needed

Applications/Uses

- Panel or Fault Indicators
- Backlighting or Edgelighting Panels
- Light Bars and Bar Graphs
- Decorative Line Lights



SMF-HM1530-509 Package Style - Standard Brightness

T5mm Socket Fault Indicator
Relampable Mating Option

Lumex Part Number	Die Material	Emitted Color	Peak (nm)	Lens	Axial Intensity @ If=20mA	V _f Typ @ If=20mA	V _f Max @ If=20mA	View Angle° 2θ	Reflow Profile Pg. 134
SMF-HM1530GD-509	GaP	Green	565	Green Diffused	30	2.2	2.6	60	Figure 1
SMF-HM1530ID-509	GaAsP	High Intensity Red	635	Red Diffused	40	2.0	2.5	60	Figure 1
SMF-HM1530SRD-509	GaAlAs	Super Red	660	Red Diffused	250	1.7	2.2	60	Figure 1
SMF-HM1530YD-509	GaAsP	Yellow	585	Yellow Diffused	30	2.1	2.5	60	Figure 1

SMS-LXU1530 - Socket Only

Sold Separately

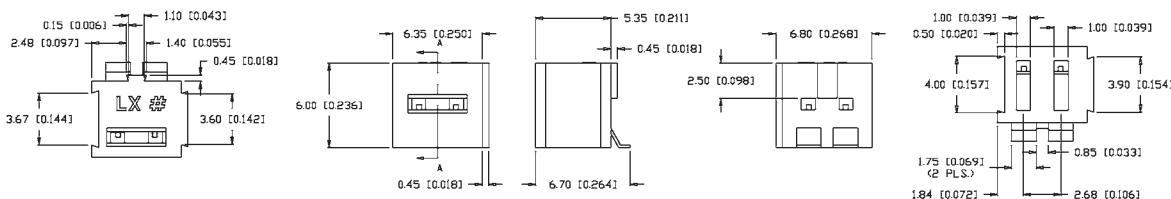

USA/Canada 1-800-278-5666
Asia +886-3-5821124



www.lumex.com



USA/Canada 1-847-359-8904
Asia +886-3-5821154

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

[SMF-HM1530SRD-509](#)