


# CGHV60040D

40 W, 6.0 GHz, GaN HEMT Die

## Description

The CGHV60040D is a gallium nitride (GaN) High Electron Mobility Transistor (HEMT). GaN has superior properties compared to silicon or gallium arsenide, including higher breakdown voltage, higher saturated electron drift velocity, and higher thermal conductivity. GaN HEMTs offer greater power density and wider bandwidths compared to Si and GaAs transistors.

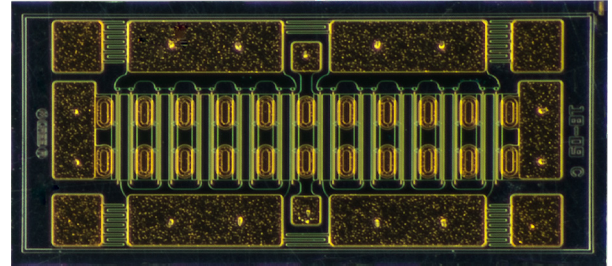

PN: CGHV60040D

## Features

- 18 dB Typical Small Signal Gain at 4 GHz
- 17 dB Typical Small Signal Gain at 6 GHz
- 65% Typical Power Added Efficiency
- 40 W Typical  $P_{SAT}$
- 50 V Operation
- High Breakdown Voltage
- Up to 6 GHz Operation

## Applications

- Cellular Infrastructure
- Class A, AB, Linear amplifiers suitable for OFDM, W-CDMA, EDGE, CDMA waveforms

## Packaging Information



- Bare die are shipped in Gel-Pak® containers
- Non-adhesive tacky membrane immobilizes die during shipment

 Large Signal Models Available for ADS and MWO



## Absolute Maximum Ratings (not simultaneous)

Parameter	Symbol	Rating	Units	Conditions
Drain-Source Voltage	$V_{DS}$	150	$V_{DC}$	25°C
Gate-Source Voltage	$V_{GS}$	-10, +2		
Storage Temperature	$T_{STG}$	-65, +150	°C	
Operating Junction Temperature	$T_J$	225		
Maximum Drain Current <sup>1</sup>	$I_{D_{MAX}}$	3.2	A	25°C
Maximum Forward Gate Current	$I_{G_{MAX}}$	5.2	mA	
Thermal Resistance, Junction to Case (packaged) <sup>2</sup>	$R_{\theta JC}$	5.10	°C/W	85°C, 20.8 W Dissipation
Thermal Resistance, Junction to Case (die only)		3.27		
Mounting Temperature	$T_s$	320	°C	30 seconds

Notes:

<sup>1</sup> Current limit for long term, reliable operation

<sup>2</sup> Eutectic die attach using 80/20 AuSn mounted to a 10 mil thick Cu15Mo85 carrier

## Electrical Characteristics (Frequency = 6 GHz unless otherwise stated; $T_c = 25^\circ\text{C}$ )

Characteristics	Symbol	Min.	Typ.	Max.	Units	Conditions
<b>DC Characteristics</b>						
Gate Pinch-Off Voltage	$V_P$	-3.8	-3.0	-2.3	V	$V_{DS} = 10\text{ V}$ , $I_D = 5.2\text{ mA}$
Drain Current <sup>1</sup>	$I_{DSS}$	4.2	5.2	—	A	$V_{DS} = 6\text{ V}$ , $V_{GS} = 2.0\text{ V}$
Drain-Source Breakdown Voltage	$V_{BR}$	125	—	—	V	$V_{GS} = -8\text{ V}$ , $I_D = 5.2\text{ mA}$
On Resistance	$R_{ON}$	—	0.56	—	$\Omega$	$V_{DS} = 0.1\text{ V}$
Gate Forward Voltage	$V_{G-ON}$	—	1.9	—	V	$I_{GS} = 5.2\text{ mA}$
<b>RF Characteristics</b>						
Small Signal Gain	$G_{SS}$	—	17	—	dB	$V_{DD} = 50\text{ V}$ , $I_{DQ} = 65\text{ mA}$
Saturated Power Output <sup>2,3</sup>	$P_{SAT}$	—	40	—	W	
Drain Efficiency <sup>4</sup>	$\eta$	—	65	—	%	$V_{DD} = 50\text{ V}$ , $I_{DQ} = 65\text{ mA}$ , $P_{SAT} = 40\text{ W}$
Intermodulation Distortion	IM3	—	-30	—	dBc	$V_{DD} = 50\text{ V}$ , $I_{DQ} = 65\text{ mA}$ , $P_{OUT} = 40\text{ W PEP}$
Output Mismatch Stress	VSWR	—	—	10 : 1	$\Psi$	No damage at all phase angles, $V_{DD} = 50\text{ V}$ , $I_{DQ} = 65\text{ mA}$ , $P_{OUT} = 40\text{ W CW}$
<b>Dynamic Characteristics</b>						
Input Capacitance	$C_{GS}$	—	7.1	—	pF	$V_{DS} = 50\text{ V}$ , $V_{GS} = -8\text{ V}$ , $f = 1\text{ MHz}$
Output Capacitance	$C_{DS}$	—	1.6	—		
Feedback Capacitance	$C_{GD}$	—	0.15	—		

Notes:


<sup>1</sup> Scaled from PCM data

<sup>2</sup>  $P_{SAT}$  is defined as  $I_G = 0.52\text{ mA}$

<sup>3</sup> Pulsed 100 $\mu\text{sec}$ , 10%

<sup>4</sup> Drain Efficiency =  $P_{OUT} / P_{DC}$

DIE Dimensions (units in microns)

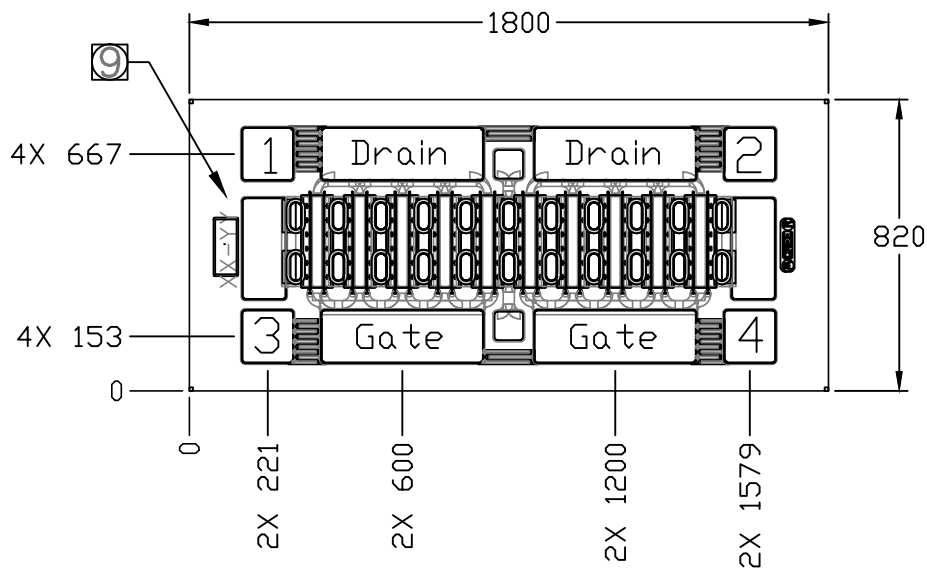

Pad	Size (microns)
Drain	464 x 156
Gate	464 x 156
Interconnect	156 x 152

Overall die size 1800 x 820 (+0/-50) microns, die thickness 100 microns.  
All Gate and Drain pads must be wire bonded for electrical connection.


Assembly Notes:

- Recommended solder is AuSn (80/20) solder. Refer to the website for the Eutectic Die Bond Procedure application note.
- Vacuum collet is the preferred method of pick-up.
- The backside of the die is the Source (ground) contact.
- Die back side gold plating is 5 microns thick minimum.
- Thermosonic ball or wedge bonding are the preferred connection methods.
- Gold wire must be used for connections.
- Use the die label (XX-YY) for correct orientation.


Electrostatic Discharge (ESD) Classifications

Parameter	Symbol	Class	Classification Level	Test Methodology
Human Body Model	HBM	TBD	ANSI/ESDA/JEDEC JS-001 Table 3	JEDEC JESD22 A114-D

## Typical Performance

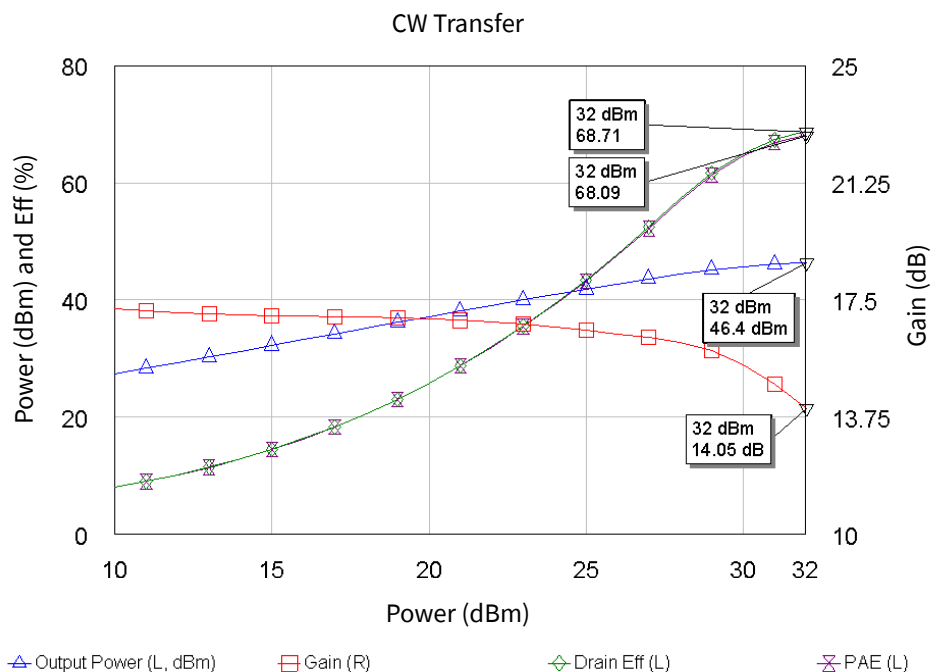

**Figure 1.** CGHV60040D Output Power, Gain and Efficiency vs Input Power at  $T_{CASE} = 25^{\circ}\text{C}$   
 $V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 65\text{ mA}$ , Frequency = 2.7 GHz

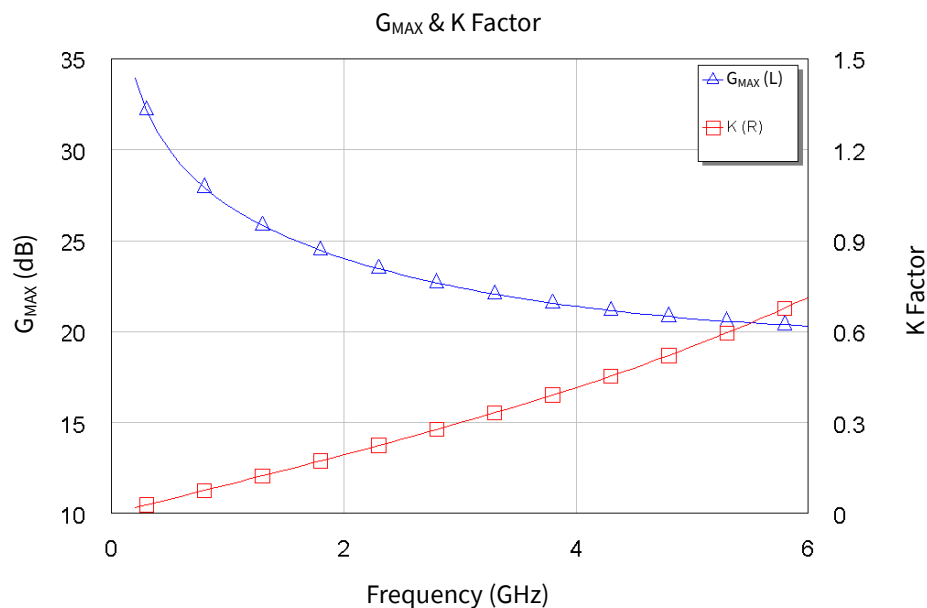

**Figure 2.** CGHV60040D  $G_{MAX}$  and K Factor vs. Frequency at  $T_{CASE} = 25^{\circ}\text{C}$   
 $V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 500\text{ mA}$

**Typical Die S-Parameters**  
(Small Signal,  $V_{DS} = 50\text{ V}$ ,  $I_{DQ} = 65\text{ mA}$ , magnitude/angle)

Frequency	Mag S11	Ang S11	Mag S21	Ang S21	Mag S12	Ang S12	Mag S22	Ang S22
0.500	0.935	-124.81	17.697	105.17	0.018	16.26	0.468	-61.04
0.600	0.932	-132.78	15.111	99.07	0.019	10.39	0.461	-66.42
0.700	0.930	-138.77	13.108	93.98	0.019	5.52	0.462	-71.19
0.800	0.929	-143.42	11.520	89.59	0.019	1.35	0.468	-75.54
0.900	0.929	-147.12	10.235	85.69	0.019	-2.32	0.478	-79.56
1.000	0.929	-150.12	9.175	82.18	0.019	-5.62	0.491	-83.30
1.100	0.930	-152.61	8.287	78.96	0.018	-8.62	0.506	-86.79
1.200	0.931	-154.70	7.532	75.98	0.018	-11.38	0.521	-90.07
1.300	0.932	-156.49	6.884	73.19	0.018	-13.94	0.537	-93.16
1.400	0.933	-158.04	6.320	70.57	0.018	-16.34	0.553	-96.07
1.500	0.934	-159.39	5.827	68.10	0.018	-18.59	0.570	-98.82
1.600	0.936	-160.58	5.391	65.75	0.017	-20.72	0.586	-101.42
1.700	0.937	-161.64	5.003	63.51	0.017	-22.73	0.602	-103.88
1.800	0.939	-162.59	4.657	61.38	0.017	-24.64	0.617	-106.22
1.900	0.940	-163.45	4.346	59.35	0.016	-26.45	0.633	-108.45
2.000	0.941	-164.24	4.065	57.40	0.016	-28.18	0.647	-110.56
2.100	0.943	-164.95	3.810	55.53	0.016	-29.82	0.661	-112.57
2.200	0.944	-165.61	3.579	53.73	0.016	-31.39	0.675	-114.49
2.300	0.946	-166.22	3.367	52.01	0.015	-32.89	0.688	-116.32
2.400	0.947	-166.79	3.174	50.35	0.015	-34.32	0.701	-118.07
2.500	0.948	-167.32	2.996	48.75	0.015	-35.70	0.713	-119.74
2.600	0.950	-167.82	2.833	47.21	0.014	-37.01	0.724	-121.34
2.700	0.951	-168.29	2.682	45.73	0.014	-38.26	0.735	-122.87
2.800	0.952	-168.73	2.542	44.29	0.014	-39.47	0.745	-124.33
2.900	0.953	-169.14	2.413	42.91	0.014	-40.62	0.755	-125.74
3.000	0.954	-169.54	2.294	41.57	0.013	-41.73	0.765	-127.08
3.200	0.957	-170.27	2.079	39.03	0.013	-43.81	0.782	-129.62
3.400	0.959	-170.94	1.892	36.65	0.012	-45.72	0.798	-131.95
3.600	0.960	-171.55	1.729	34.42	0.012	-47.49	0.812	-134.12
3.800	0.962	-172.11	1.585	32.31	0.011	-49.12	0.825	-136.13
4.000	0.964	-172.64	1.458	30.33	0.011	-50.63	0.837	-137.99
4.200	0.965	-173.13	1.346	28.45	0.010	-52.03	0.848	-139.73
4.400	0.966	-173.59	1.246	26.67	0.010	-53.32	0.857	-141.35
4.600	0.967	-174.02	1.156	24.99	0.009	-54.51	0.866	-142.87
4.800	0.969	-174.43	1.076	23.38	0.009	-55.62	0.874	-144.29
5.000	0.970	-174.82	1.004	21.85	0.009	-56.64	0.882	-145.63
5.200	0.970	-175.19	0.939	20.39	0.008	-57.59	0.888	-146.88
5.400	0.971	-175.54	0.880	19.00	0.008	-58.46	0.894	-148.07
5.600	0.972	-175.88	0.826	17.66	0.008	-59.27	0.900	-149.18
5.800	0.973	-176.20	0.777	16.37	0.007	-60.01	0.905	-150.24
6.000	0.973	-176.51	0.732	15.14	0.007	-60.69	0.910	-151.24

To download the s-parameters in s2p format, go to the CGHV40320D Product page.

Part Number System

CGHV60040D

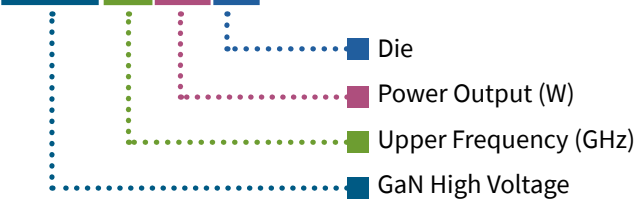


Table 1.

Parameter	Value	Units
Upper Frequency <sup>1</sup>	6.0	GHz
Power Output	40	W
Package	Bare Die	—

Note:  
<sup>1</sup> Alpha characters used in frequency code indicate a value greater than 9.9 GHz. See Table 2 for value.

Table 2.

Character Code	Code Value
A	0
B	1
C	2
D	3
E	4
F	5
G	6
H	7
J	8
K	9
Examples:	1A = 10.0 GHz 2H = 27.0 GHz



Product Ordering Information

Order Number	Description	Unit of Measure	Image
CGHV60040D	GaN HEMT	Each	A high-magnification micrograph of a GaN HEMT device. The device is rectangular with a central area containing several vertical, parallel structures. The edges of the device are defined by a series of small, square features. The overall color is a mix of dark and light brown/gold.

## Notes & Disclaimer

---

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[MACOM:](#)

[CGHV60040D-GP4](#)