

4:1 Step Down Balun Transformer

5 - 200 MHz

Rev. V3

Features



- Surface Mount Package
- 4:1 Step Down Transformer
- Excellent performance under DC bias current, also when current flows is imbalanced through outputs
- 260°C Reflow Compatible
- RoHS* Compliant, lead free
- Available on Tape and Reel.

Description

The MABA-011002 is a 4:1 step down balun transformer.

This transformer is ideally suited for CATV Broadband applications.

Functional Schematic



Pin Configuration

Pin #	Function
1	Secondary Dot (output1)
2	Ground (center tap)
3	Secondary (output2)
4	Primary (RF ground)
5	Ground (not used)
6	Primary dot (input)

Electrical Specifications: Freq. = 5 - 200 MHz, T_A = +25°C, Z₀ = 75 Ω, P_{IN} = 0 dBm

Parameter	Frequency Test Conditions (MHz)	Units	Min.	Typ.	Max.
Impedance Ratio	—	ratio	—	4:1	—
Insertion Loss (pin 6 - pin 1)	5 - 50	dB	—	0.4	0.8
	50 - 150			1.0	2.2
	150 - 200			2.0	3.1
Insertion Loss (pin 6 - pin 3)	5 - 50	dB	—	0.4	0.8
	50 - 150			1.1	2.5
	150 - 200			2.4	3.6
Amplitude Balance	5 - 50	dB	—	0.0	±0.4
	50 - 150			0.0	±1.0
	150 - 200			0.3	±1.4
Phase Balance	5 - 50	°	—	0.6	±4
	50 - 200			0.8	±9
Input Return Loss (pin 6)	5 - 25	dB	17	20	—
	25 - 50		12	15	
	50 - 150		5	9	
	150 - 200		3	5	

Ordering Information

Part Number	Description
MABA-011002	900 piece reel
MABA-011002-TB	Customer Evaluation Board





Recommended Maximum Ratings

Parameter	Units
Input RF Power	1 W
Internal Load Dissipation	0.125 W
DC Bias Current	>900 mA
Operating Temperature	-40°C - +85°C

4:1 Step Down Balun Transformer 5 - 200 MHz

Rev. V3


Typical Performance Curves

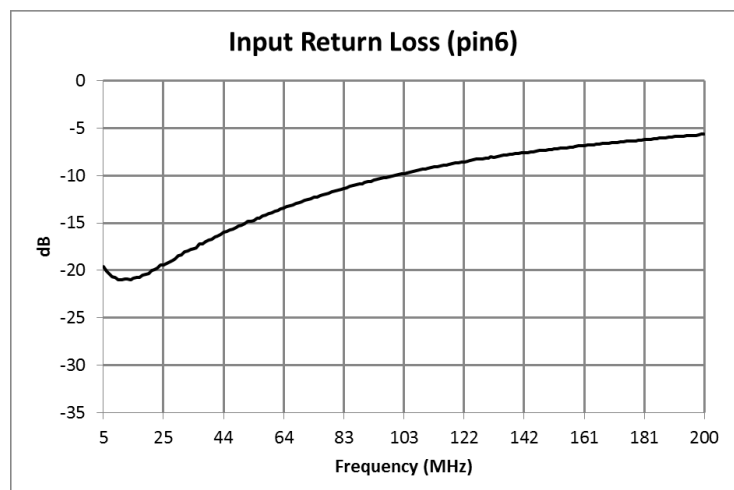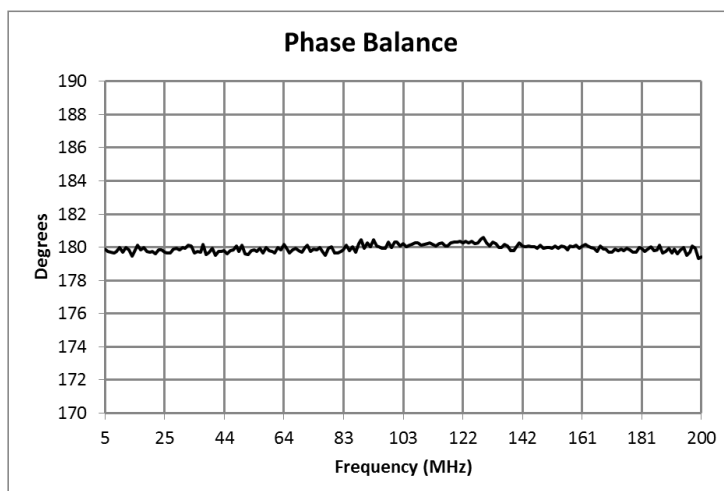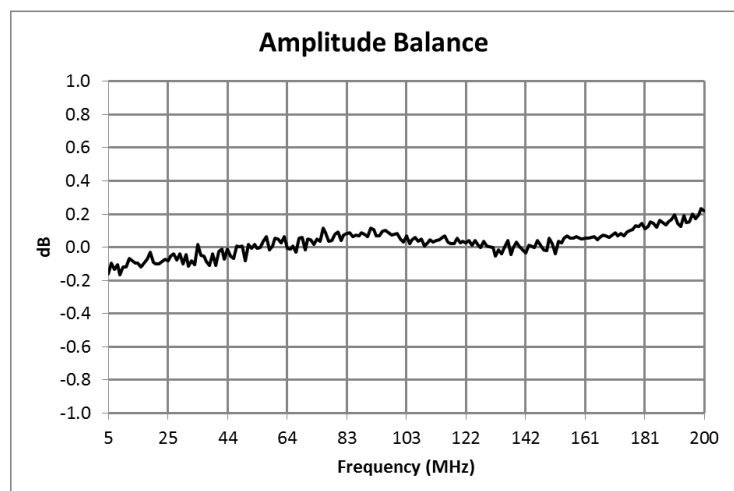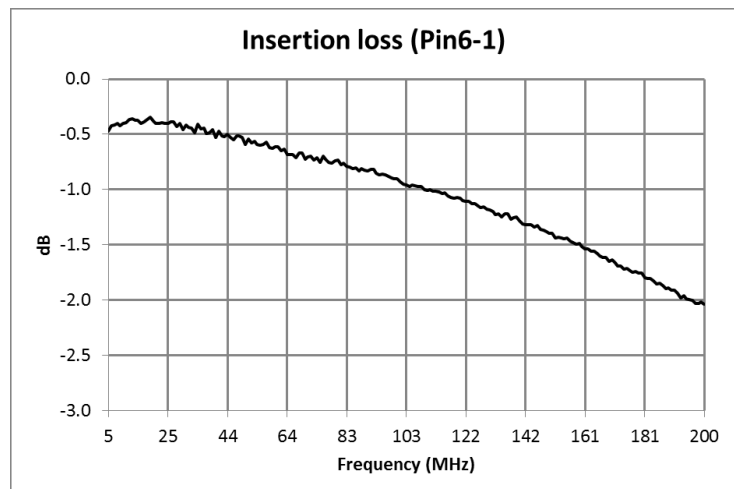


4:1 Step Down Balun Transformer 5 - 200 MHz

Rev. V3


Application Circuit

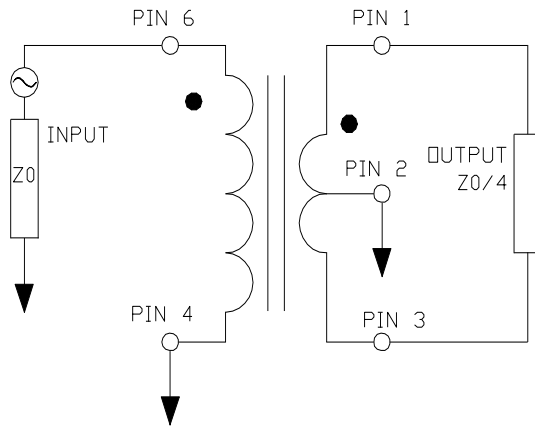

PCB Layout



Outline Drawing

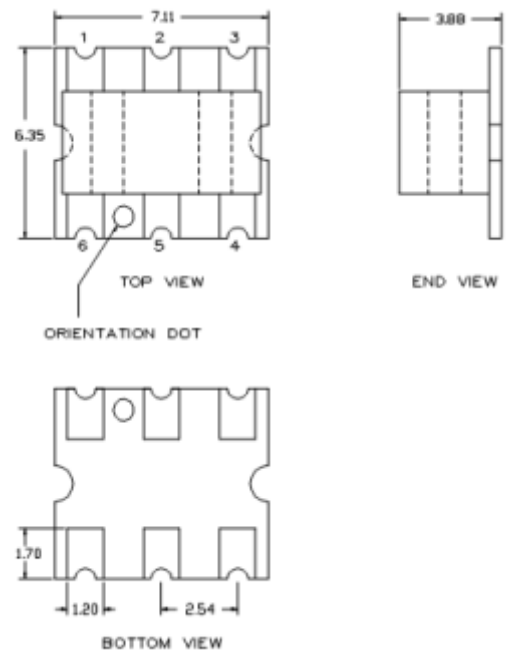

1. Dimensions in mm.
2. Tolerance: ± 0.2 mm unless otherwise noted.
3. Model number and lot code are printed on the reel.
4. Lead plating: ENIG.

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	900
Reel Size	mm	330
Tape Width	mm	16.00
Pitch	mm	12.00
Ao	mm	6.60
Bo	mm	7.40
Ko	mm	4.10
Orientation	-	F38
Reference Application Note ANI-019 for orientation		

4:1 Step Down Balun Transformer 5 - 200 MHz

Rev. V3

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

MACOM:

[MABA-011002](#) [MABA-011002-TB](#)