

Features

- Ideally Suited for Automated Assembly Processes
- Halogen Free. "Green" Device (Note 1)
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

Maximum Ratings

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Thermal Resistance : 500°C/W Junction to Ambient


Parameter	Symbol	Rating	Conditions
Power Dissipation	P_D	250mW	Note 2
Maximum Forward Voltage	V_F	0.9V	$I_F=10mA$

Note: 1. Halogen free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

2. Device Mounted on FR-4 PCB with Minimum Recommended Pad Layout.


250 mW
Zener Diode
2.4 to 39 Volts

DFN1006-2L

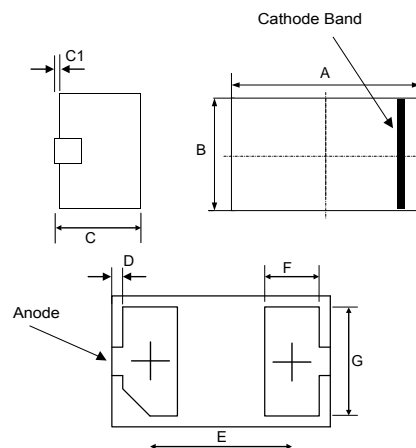

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.037	0.041	0.95	1.05	
B	0.022	0.026	0.55	0.65	
C	0.016	0.020	0.40	0.50	
C1	-----	0.002	-----	0.05	
D	0.001	0.003	0.02	0.08	
E	0.026BSC		0.65BSC		
F	0.008	0.012	0.20	0.30	
G	0.018	0.022	0.45	0.55	

Suggested Solder Pad Layout

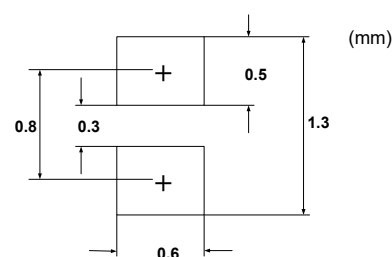

Electrical Characteristics @ 25°C Unless Otherwise Specified

MCC Part Number	Zener Voltage ⁽³⁾				Maximum Zener Impedance ⁽⁴⁾			Maximum Reverse Current I _R @ V _R		Typical Temperature Coefficient @ I _{ZTC}		Test Current	Marking Code
	V _Z @ I _{ZT}			I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R	V _R	mV/°C		I _{ZTC}	
	Min.(V)	Nom(V)	Max.(V)	mA	Ω		mA	μA	V	Min	Max.	mA	
BZT52C2V4L3P	2.2	2.4	2.6	5	100	600	1.0	50	1.0	-3.5	0	5	WX
BZT52C2V7L3P	2.5	2.7	2.9	5	100	600	1.0	20	1.0	-3.5	0	5	W1
BZT52C3V0L3P	2.8	3.0	3.2	5	95	600	1.0	10	1.0	-3.5	0	5	W2
BZT52C3V3L3P	3.1	3.3	3.5	5	95	600	1.0	5	1.0	-3.5	0	5	W3
BZT52C3V6L3P	3.4	3.6	3.8	5	90	600	1.0	5	1.0	-3.5	0	5	W4
BZT52C3V9L3P	3.7	3.9	4.1	5	90	600	1.0	3	1.0	-3.5	0	5	W5
BZT52C4V3L3P	4.0	4.3	4.6	5	90	600	1.0	3	1.0	-3.5	0	5	W6
BZT52C4V7L3P	4.4	4.7	5.0	5	80	500	1.0	3	2.0	-3.5	0.2	5	W7
BZT52C5V1L3P	4.8	5.1	5.4	5	60	480	1.0	2	2.0	-2.7	1.2	5	9Y
BZT52C5V6L3P	5.2	5.6	6.0	5	40	400	1.0	1	2.0	-2.0	2.5	5	9A
BZT52C6V2L3P	5.8	6.2	6.6	5	10	150	1.0	3	4.0	0.4	3.7	5	9B
BZT52C6V8L3P	6.4	6.8	7.2	5	15	80	1.0	2	4.0	1.2	4.5	5	9C
BZT52C7V5L3P	7.0	7.5	7.9	5	15	80	1.0	1	5.0	2.5	5.3	5	9D
BZT52C8V2L3P	7.7	8.2	8.7	5	15	80	1.0	0.7	5.0	3.2	6.2	5	9E
BZT52C9V1L3P	8.5	9.1	9.6	5	15	100	1.0	0.5	6.0	3.8	7.0	5	9F
BZT52C10L3P	9.4	10	10.6	5	20	150	1.0	0.2	7.0	4.5	8.0	5	9G
BZT52C11L3P	10.4	11	11.6	5	20	150	1.0	0.1	8.0	5.4	9.0	5	9H
BZT52C12L3P	11.4	12	12.7	5	25	150	1.0	0.1	8.0	6.0	10.0	5	9J
BZT52C13L3P	12.4	13	14.1	5	30	170	1.0	0.1	8.0	7.0	11.0	5	9K
BZT52C15L3P	13.8	15	15.6	5	30	200	1.0	0.1	10.5	9.2	13.0	5	9L
BZT52C16L3P	15.3	16	17.1	5	40	200	1.0	0.1	11.2	10.4	14.0	5	9M
BZT52C18L3P	16.8	18	19.1	5	45	225	1.0	0.1	12.6	12.4	16.0	5	9N
BZT52C20L3P	18.8	20	21.2	5	55	225	1.0	0.1	14.0	14.4	18.0	5	9P
BZT52C22L3P	20.8	22	23.3	5	55	250	1.0	0.1	15.4	16.4	20.0	5	9R
BZT52C24L3P	22.8	24	25.6	5	70	250	1.0	0.1	16.8	18.4	22.0	5	9S
BZT52C36L3P	34	36	38	2	90	350	0.5	0.1	25.2	36.5	45.5	5	9W
BZT52C39L3P	37	39	41	2	130	350	0.5	0.1	27.3	36.8	49.8	5	9X

Note: 3. Short Duration Pulse Test Used to Minimize Self-heating Effect.

4. f=1KHz

Curve Characteristics

Fig. 1 - Typical Zener Breakdown Characteristics

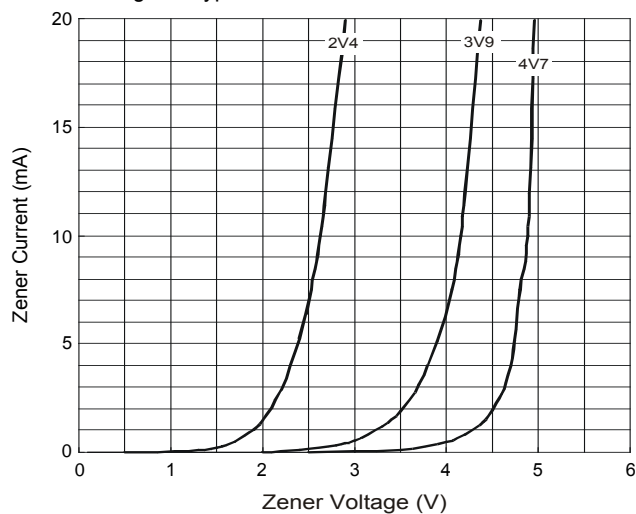


Fig. 2 - Typical Zener Breakdown Characteristics

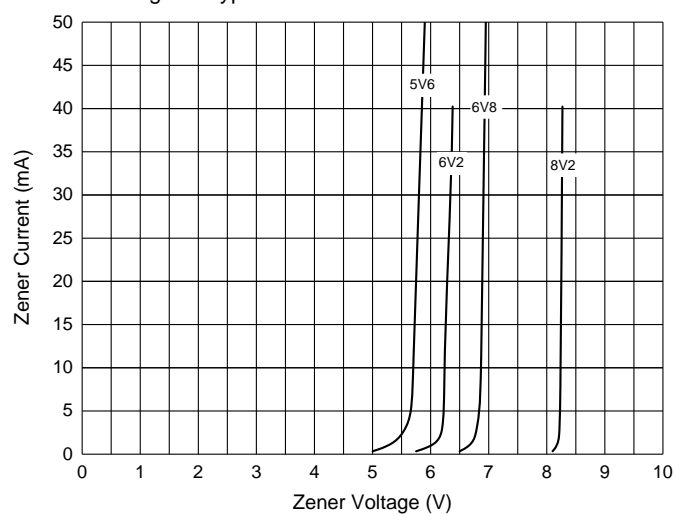


Fig. 3 - Typical Zener Breakdown Characteristics


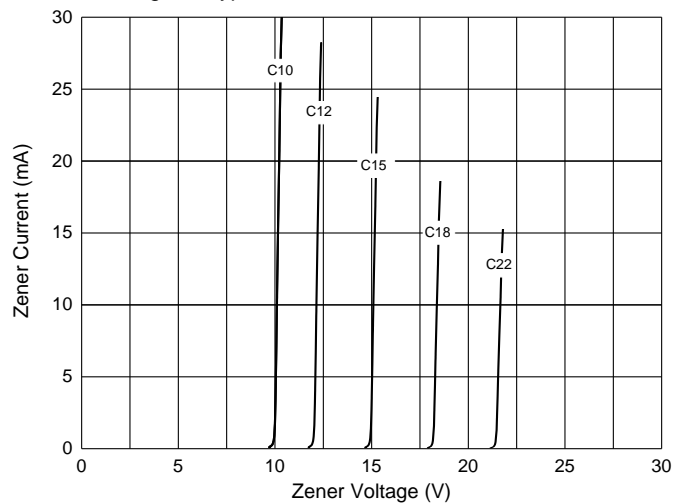


Fig. 4 - Typical Zener Breakdown Characteristics

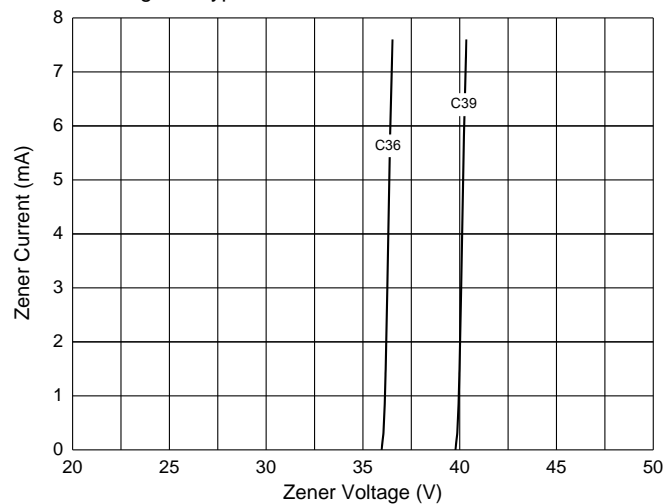

Ordering Information

Device	Packing
Part Number-TP	Tape&Reel:10Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp** . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp** . and all the companies whose products are represented on our website, harmless against all damages. **Micro Commercial Components Corp.** products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micro Commercial Components \(MCC\):](#)

[BZT52C12L3P-TP](#) [BZT52C15L3P-TP](#) [BZT52C3V3L3P-TP](#) [BZT52C3V9L3P-TP](#) [BZT52C4V3L3P-TP](#)
[BZT52C5V1L3P-TP](#) [BZT52C5V6L3P-TP](#) [BZT52C8V2L3P-TP](#) [BZT52C24L3P-TP](#) [BZT52C2V4L3P-TP](#)
[BZT52C2V7L3P-TP](#) [BZT52C36L3P-TP](#) [BZT52C39L3P-TP](#) [BZT52C3V0L3P-TP](#) [BZT52C3V6L3P-TP](#)
[BZT52C4V7L3P-TP](#) [BZT52C6V2L3P-TP](#) [BZT52C6V8L3P-TP](#) [BZT52C7V5L3P-TP](#) [BZT52C9V1L3P-TP](#)
[BZT52C10L3P-TP](#) [BZT52C11L3P-TP](#) [BZT52C13L3P-TP](#) [BZT52C16L3P-TP](#) [BZT52C18L3P-TP](#) [BZT52C20L3P-TP](#)
[BZT52C22L3P-TP](#)