

Features

- Surface Mount Package
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)


Maximum Ratings

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Maximum Thermal Resistance: 357°C/W Junction to Ambient

Parameter	Symbol	Rating	Conditions
Power Dissipation	P_D	350mW	Note 1
Peak Forward Surge Current	I_{FSM}	4.0A	Note 2
Maximum Forward Voltage	V_F	0.9V	$I_F=10mA$


Note: 1. Mounted on FR4 PC Board With Our Suggested Solder Pad Layout
2. Measured on 8.3ms, Single Half Sine-wave or Equivalent Square Wave, Duty Cycle=4 Pulses Per Minute Maximum.

Internal Structure




**350 mW
Zener Diode
2.4 to 39 Volts**

SOT-23

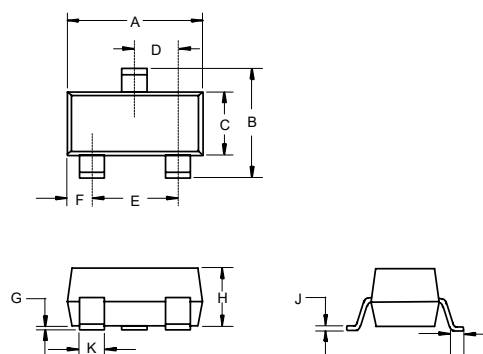

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.110	0.120	2.80	3.04	
B	0.083	0.104	2.10	2.64	
C	0.047	0.055	1.20	1.40	
D	0.034	0.041	0.85	1.05	
E	0.067	0.083	1.70	2.10	
F	0.018	0.024	0.45	0.60	
G	0.0004	0.006	0.01	0.15	
H	0.035	0.043	0.90	1.10	
J	0.003	0.007	0.08	0.18	
K	0.012	0.020	0.30	0.51	
L	0.007	0.020	0.20	0.50	

Suggested Solder Pad Layout



Electrical Characteristics @ 25°C Unless Otherwise Specified

MCC Part Number ⁽³⁾	Nominal Zener Voltage ⁽⁴⁾	Test current	Maximum Zener Impedance ⁽⁵⁾			Maximum Reverse Leakage Current		Marking Code
	$V_Z @ I_{ZT}$	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$	I_{ZK}	I_R	V_R	
	V	mA	Ω	Ω	mA	$\mu A(\text{Max.})$	V	
MMBZ5221B	2.4	20	30	1200	0.25	100	1.0	KC1/C1
MMBZ5222B	2.5	20	30	1250	0.25	100	1.0	KC2/C2
MMBZ5223B	2.7	20	30	1300	0.25	75	1.0	KC3/C3
MMBZ5225B	3.0	20	29	1600	0.25	50	1.0	KC5/C5
MMBZ5226B	3.3	20	28	1600	0.25	25	1.0	KG1/D1
MMBZ5227B	3.6	20	24	1700	0.25	15	1.0	KG2/D2
MMBZ5228B	3.9	20	23	1900	0.25	10	1.0	KG3/D3
MMBZ5229B	4.3	20	22	2000	0.25	5.0	1.0	KG4/D4
MMBZ5230B	4.7	20	19	1900	0.25	5.0	2.0	KG5/D5
MMBZ5231B	5.1	20	17	1600	0.25	5.0	2.0	KE1/E1
MMBZ5232B	5.6	20	11	1600	0.25	5.0	3.0	KE2/E2
MMBZ5233B	6.0	20	7.0	1600	0.25	5.0	3.5	KE3/E3
MMBZ5234B	6.2	20	7.0	1000	0.25	5.0	4.0	KE4/E4
MMBZ5235B	6.8	20	5.0	750	0.25	3.0	5.0	KE5/E5
MMBZ5236B	7.5	20	6.0	500	0.25	3.0	6.0	KF1/F1
MMBZ5237B	8.2	20	8.0	500	0.25	3.0	6.5	KF2/F2
MMBZ5238B	8.7	20	8.0	600	0.25	3.0	6.5	KF3/F3
MMBZ5239B	9.1	20	10	600	0.25	3.0	7.0	KF4/F4
MMBZ5240B	10	20	17	600	0.25	3.0	8.0	KF5/F5
MMBZ5241B	11	20	22	600	0.25	2.0	8.4	KH1/H1
MMBZ5242B	12	20	30	600	0.25	1.0	9.1	KH2/H2
MMBZ5243B	13	9.5	13	600	0.25	0.5	9.9	KH3/H3
MMBZ5244B	14	9.0	15	600	0.25	0.1	10	KH4/H4
MMBZ5245B	15	8.5	16	600	0.25	0.1	11	KH5/H5
MMBZ5246B	16	7.8	17	600	0.25	0.1	12	KJ1/J1
MMBZ5248B	18	7.0	21	600	0.25	0.1	14	KJ3/J3
MMBZ5250B	20	6.2	25	600	0.25	0.1	15	KJ5/J5
MMBZ5251B	22	5.6	29	600	0.25	0.1	17	KK1/K1
MMBZ5252B	24	5.2	33	600	0.25	0.1	18	KK2/K2
MMBZ5254B	27	5.0	41	600	0.25	0.1	21	KK4/K4
MMBZ5255B	28	4.5	44	600	0.25	0.1	21	KK5/K5
MMBZ5256B	30	4.2	49	600	0.25	0.1	23	KM1/M1
MMBZ5257B	33	3.8	58	700	0.25	0.1	25	KM2/M2
MMBZ5258B	36	3.4	70	700	0.25	0.1	27	KM3/M3
MMBZ5259B	39	3.2	80	800	0.25	0.1	30	KM4/M4

Note:

3. Tolerance and Type Number Designation. The Type Numbers Listed Have a Standard Tolerance on The Nominal Zener Voltage of $\pm 5\%$.
4. Zener Voltage (V_Z) Measurement. Guarantess The Zener Voltage When Measured at 90 Seconds While Maintaining The Lead Temperature (T_L) at 25°C from The Diode Body.
5. Zener Impedance (Z_Z) Derivation. The Zener Impedance is Derived from The 60 Cycle AC Voltage, Which Results When an AC Current Having an rms Value Equal to 10% of The DC Zener Current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK} .

Curve Characteristics

Fig. 1 - Power Derating Curve

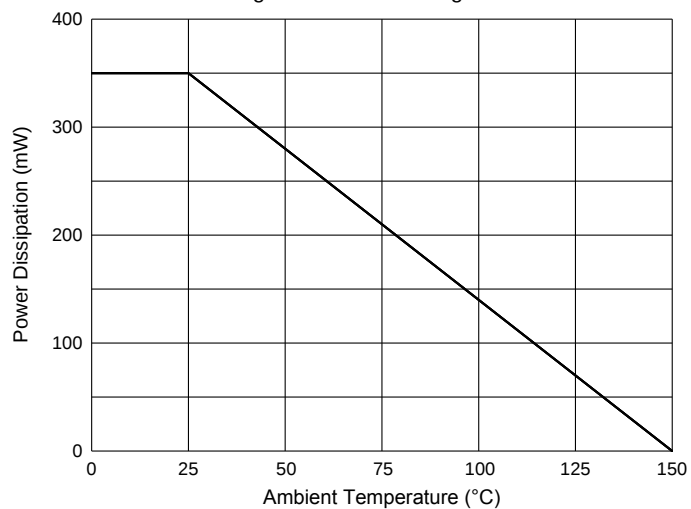


Fig. 2 - Typical Zener Breakdown Characteristics


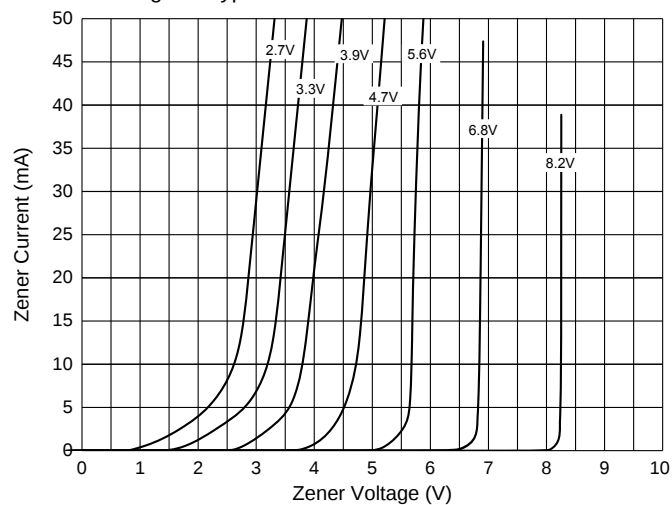


Fig. 3 - Typical Zener Breakdown Characteristics

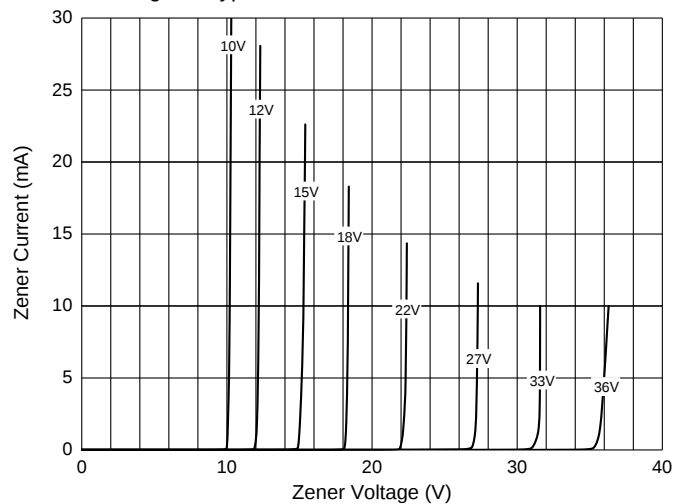

Ordering Information

Device	Packing
Part Number-TP	Tape&Reel:3Kpcs/Reel

Note : Adding "-HF" Suffix For Halogen Free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp** . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp** . and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Micro Commercial Components (MCC):

<u>MMBZ5227B-TP</u>	<u>MMBZ5231B-TP</u>	<u>MMBZ5238B-TP</u>	<u>MMBZ5248B-TP</u>	<u>MMBZ5244B-TP</u>	<u>MMBZ5230B-TP</u>
<u>MMBZ5241B-TP</u>	<u>MMBZ5255B-TP</u>	<u>MMBZ5226B-TP</u>	<u>MMBZ5252B-TP</u>	<u>MMBZ5240B-TP</u>	<u>MMBZ5221B-TP</u>
<u>MMBZ5234B-TP</u>	<u>MMBZ5235B-TP</u>	<u>MMBZ5236B-TP</u>	<u>MMBZ5257B-TP</u>	<u>MMBZ5225B-TP</u>	<u>MMBZ5245B-TP</u>
<u>MMBZ5239B-TP</u>	<u>MMBZ5259B-TP</u>	<u>MMBZ5222B-TP</u>	<u>MMBZ5246B-TP</u>	<u>MMBZ5250B-TP</u>	<u>MMBZ5233B-TP</u>
<u>MMBZ5258B-TP</u>	<u>MMBZ5228B-TP</u>	<u>MMBZ5232B-TP</u>	<u>MMBZ5242B-TP</u>	<u>MMBZ5251B-TP</u>	<u>MMBZ5229B-TP</u>
<u>MMBZ5223B-TP</u>	<u>MMBZ5243B-TP</u>	<u>MMBZ5254B-TP</u>	<u>MMBZ5237B-TP</u>	<u>MMBZ5256B-TP</u>	