

AL

E502650

Features

- Lead Free Finish/RoHS Compliant (Note1) ("P"Suffix Designates Compliant. See Ordering Information)
- Epoxy Meets UL 94 V-0 Flammability Rating
- Moisture Sensitivity Level 1
- Low Leakage And Low Forward Voltage
- Any Mounting Position
- Silver Plated Copper Leads
- Solder Dip 275 °C Max. 7s, Per JESD 22-B106

Maximum Ratings

- Operating Junction Temperature Range: -55°C to +150°C
- Storage Temperature Range: -55°C to +150°C
- Typical Thermal Resistance(Note 2): 18°C/W Junction to Ambient
- Typical Thermal Resistance(Note 3): 3.0°C/W Junction to Case
- Maximum Mounting Torque: 10 cm-kg (8.8 inches-lbs)

MCC Part Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
RS801	RS801	50V	35V	50V
RS802	RS802	100V	70V	100V
RS803	RS803	200V	140V	200V
RS804	RS804	400V	280V	400V
RS805	RS805	600V	420V	600V
RS806	RS806	800V	560V	800V
RS807	RS807	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified


Average Forward Current	I _{F(AV)}	8.0A 6.0A	T _C = 90°C T _A = 45°C
Peak Forward Surge Current	I _{FSM}	300A	8.3ms, Half Sine
Maximum Instantaneous Forward Voltage	V _F	1.0V	I _{FM} = 8A ; T _J = 25°C
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	10µA 1mA	T _J = 25°C T _J = 125°C

Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex Notes 7a.

 Units Mounted in Free Air, No Heatsink, P.C.B 0.375"(9.5mm) Lead Length with 0.5 × 0.5"(12 12mm) Copper Pads.

3. Units Mounted on a 3.0 × 3.0 0.11"(7.5 × 7.5 × 0.3cm) Al.Plate Heatsink.

8 Amp Single Phase Bridge Rectifier 50 to 1000 Volts

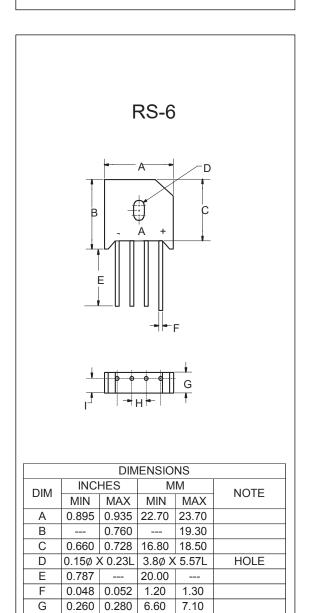

0.180

0.181

H

0.220

0.205

4.60

4.60

5.60

5.20



Curve Characteristics

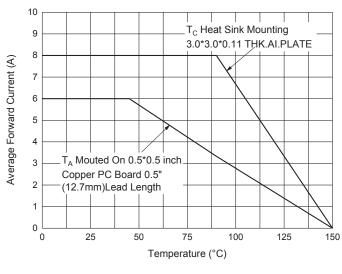
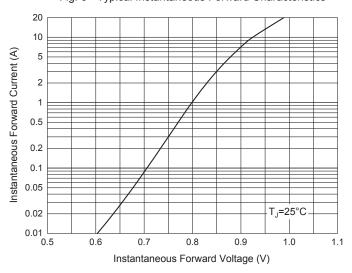


Fig. 1 - Forward Current Derating Curve

Fig. 3 - Typical Instantaneous Forward Characteristics




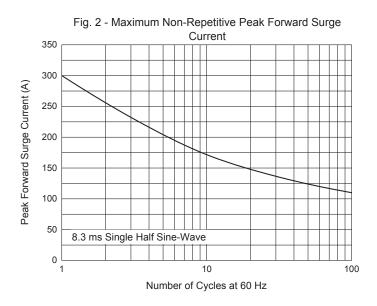


Fig. 4 - Typical Reverse Leakage Characteristics



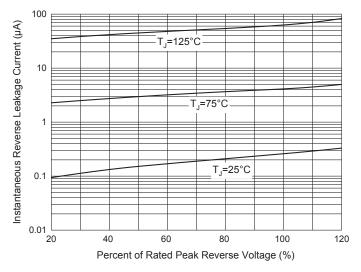

Ordering Information

Device	Packing	
Part Number-BP	Bulk: 400Pcs/Box,2.4KPcs/Carton	

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages. *Micro Commercial Components Corp*. products are sold subject to the general terms and conditions of commercial sale, as published at

https://www.mccsemi.com/Home/TermsAndConditions.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources**. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Micro Commercial Components (MCC): RS801-BP RS802-BP RS803-BP RS804-BP RS805-BP RS806-BP RS807-BP