

# IP series

Pushbutton switches for harsh environments •  
bushing Ø 12 mm • momentary



## DISTINCTIVE FEATURES

- Illuminated or non-illuminated
- Tactile feedback
- Wide variety of configurations
- Flat round actuator for optional marking
- Sealed to IP67 and IP69K



## ENVIRONMENTAL SPECIFICATIONS

- Front panel sealing: IP67 according to IEC 60529  
IP69K according to DIN 40050-9 (non-illuminated) with cap U5125
- Shock resistance: 100 g according to IEC 512-4, test 6c
- Vibration resistance: 10-500Hz - 10 g according to IEC 512-4, test 6d
- Salt spray: IEC 512-6, test 11f
- Robustness (non-illuminated): IK06 according to EN 62262 (1 joule)
- Operating temperature: -40 °C to +85 °C (-40 °F to +185 °F)



## ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load (gold plated silver contacts):  
5 A 28 VDC, 70,000 cycles (only function 3)  
0.2 A 48 VDC, 500,000 cycles  
0.5 A 48 VAC, 500,000 cycles  
For W terminals, current has to be limited to 400 mA.
- Initial contact resistance: 100 mΩ max.
- Insulation resistance: 1 GΩ min. at 500 VDC
- Dielectric strength: 1,500 Vrms
- Contact bounce: 10 ms



### LED COMPONENT SPECIFICATIONS

LED color	Forward current	Typ. forward voltage	Max. forward voltage
Super red (L0S)	20 mA	2.1 V	2.3 V
Yellow (L0Y)	20 mA	2.1 V	2.3 V
Green (L0G)	20 mA	2.1 V	2.3 V
Blue (L0B)	20 mA	3.2 V	3.8 V
White (L0W)	20 mA	3.35 V	4.25 V
Red/green (LSG)	20 mA	Red: 1.95 V / green: 2.1 V	2.5 V
Yellow/green (LYG)	20 mA	Yellow: 2 V / green: 2.1 V	2.5 V

A resistor must be series-connected by the user.  

$$\text{Resistor value} = \frac{\text{supply voltage} - \text{LED forward voltage}}{\text{LED forward current}}$$

The company reserves the right to change specifications without notice.

# IP series

Pushbutton switches for harsh environments •  
bushing Ø 12 mm • momentary



## GENERAL SPECIFICATIONS

- Panel thickness: 1.5 mm (.059) min.  
4 mm (.157 max.)
- Total travel:  
Function 3: 1.7 mm (.067) ± 0.3 mm (0.012)  
Function 5: 1.3 mm (.051) ± 0.3 mm (0.012)
- Typical operating force: 4 N ± 2 N
- Low level/mech. life: 1,000,000 cycles
- Torque: 1.5 Nm max. applied to nut
- Soldering: 320 °C (608 °F) max. for 3 sec.



## MATERIALS

- Case: thermoplastic UL94-V0
- Actuator: polyamide 6/6
- Bushing/bezel: zinc die-cast (zamak), black painted
- Contacts: - silver, gold plated (std)  
- brass, gold plated (for option 104)
- Output wires (flying lead terminals):  
**F version:** AWG20, section 0.6 mm<sup>2</sup>  
**W version:** AWG24, section 0.23 mm<sup>2</sup>
- LED wires:  
**F version:** AWG26, section 0.12 mm<sup>2</sup>  
**W version:** AWG24, section 0.23 mm<sup>2</sup>
- Lens: polycarbonate
- Terminal seal: epoxy

## AGENCY APPROVAL




2 A 125 VAC/250 VAC  
File E83438  
See following pages.




## TERMINALS

### ILLUMINATED MODELS




Solder lug **S**




Straight **P**

### NON-ILLUMINATED MODELS



Straight **P**




Quick-connect **Z1**




## ELECTRICAL FUNCTIONS

### ILLUMINATED MODELS




Function 3 (NO)

### NON-ILLUMINATED MODELS



Function 3 (NO)





Function 5 (NC/NO)





## MOUNTING

### PANEL CUT-OUT

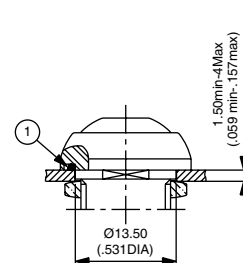


### MATRIX MOUNTING - BACK OF PANEL SPACE REQUIREMENT

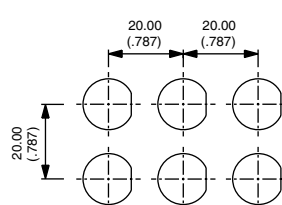

Pushbutton switches for harsh environments •  
bushing Ø 12 mm • momentary



## BUILD YOUR PART NUMBER

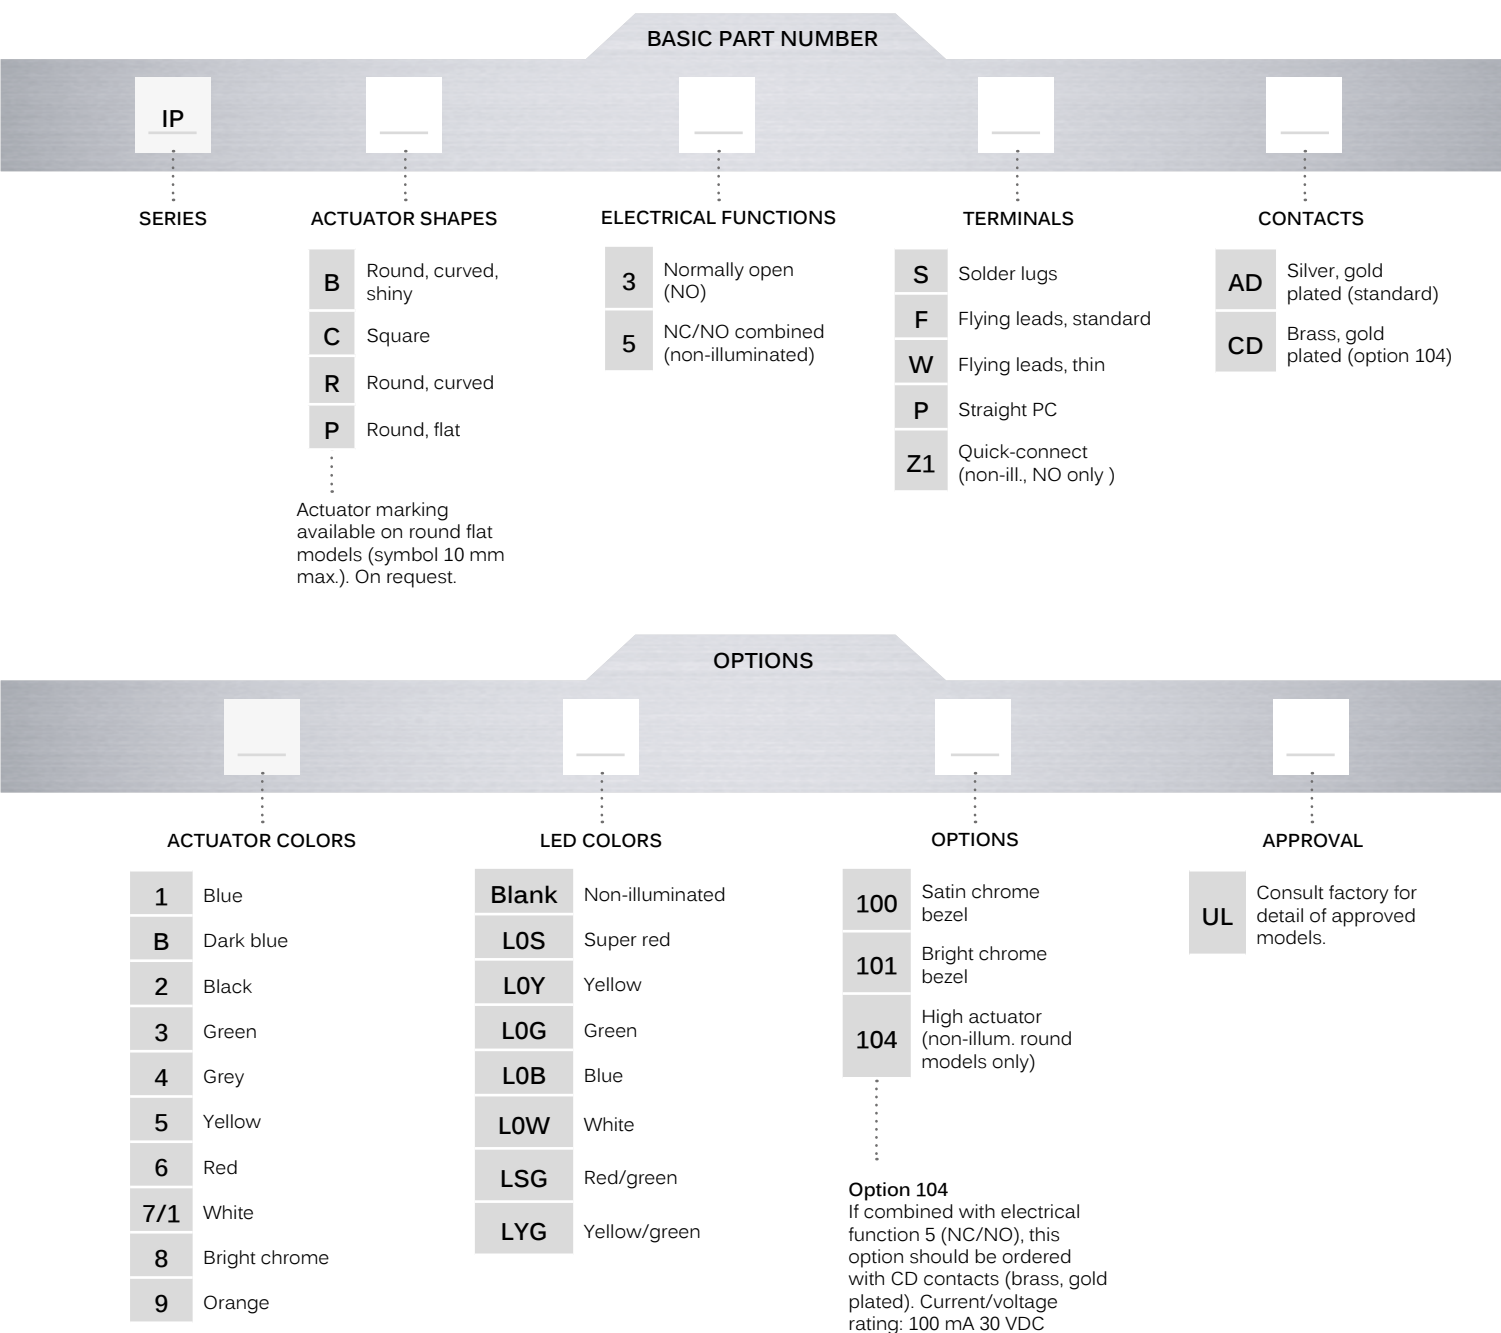

## ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.

- ⚠ **Notice:** please note that not all combinations of above numbers are available. Refer to the following pages for further information.
- 💧 **A sealing boot** is available to protect the switches against frost and sand. See "Sealing Boots" section of website.
- 🔩 **Mounting accessories:** Standard hardware supplied: 1 hex nut 14 mm (.551) across flats and 1 O-ring. Hex nut part number U166.

# IP series

Pushbutton switches for harsh environments •  
bushing Ø 12 mm • momentary

## SQUARE - ILLUMINATED SOLDER LUG TERMINALS



IPC3SAD



Normally Open

Also available with straight PC terminals: **IPC3PAD**  
LED color is indicated by the bottom of the switch.

## SQUARE - ILLUMINATED FLYING LEAD TERMINALS



IPC3FAD



Normally Open

For THIN flying leads, replace F with W.

**Wire colors:** black: NO contact, red: LED anode(+), blue: LED cathode(-)  
Shown with standard flying lead terminals.

## SQUARE - NON ILLUMINATED SOLDER LUG TERMINALS



IPC3SAD



Normally Open

IPC5SAD



Normally Open

Also available with straight PC terminals: **IPC3PAD** (NO) or **IPC5PAD** (NC/NO)  
and quick-connect terminals: **IPC3Z1AD** (NO only)

## SQUARE - NON ILLUMINATED FLYING LEAD TERMINALS



IPC3FAD



Normally Open

IPC5FAD




NC/NO combined


For THIN flying leads, replace F with W.

**Wire colors** (NC/NO): black: NO, blue: NC.  
Shown with standard flying lead terminals.


→ FLAT

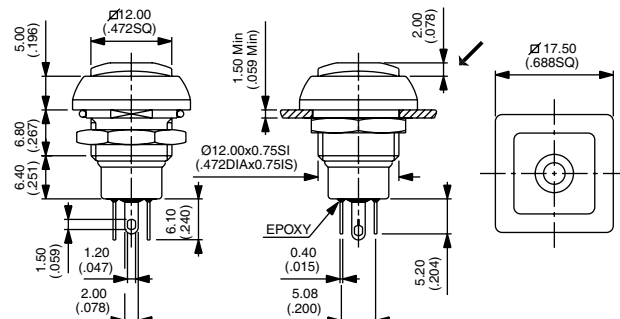


→ FLAT

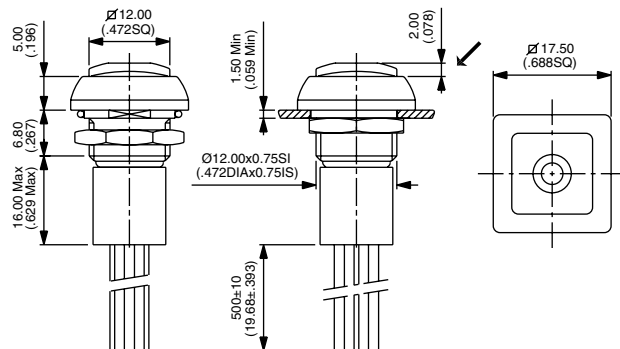

→ FLAT

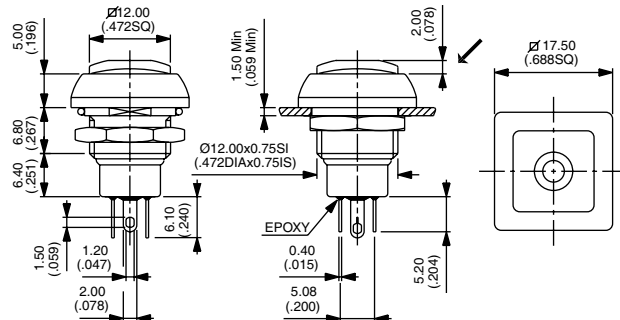

→ FLAT

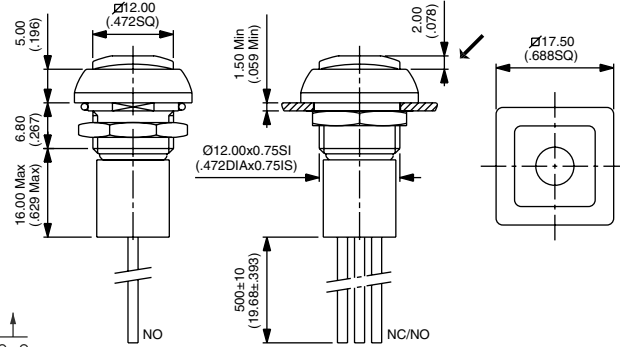

NO

NC/NO

# IP series

Pushbutton switches for harsh environments •  
bushing Ø 12 mm • momentary

## ROUND - ILLUMINATED SOLDER LUG TERMINALS



IPR3SAD



Normally Open

Also available with straight PC terminals: **IPR3PAD**  
LED colour is indicated by the bottom of the switch.

## ROUND - ILLUMINATED FLYING LEAD TERMINALS



IPR3FAD



Normally Open

For THIN flying leads, replace F with W.  
**Wire colors:** black: NO contact, red: LED anode(+), blue: LED cathode(-)  
Shown with standard flying lead terminals.

## ROUND - NON ILLUMINATED SOLDER LUG TERMINALS



Curved actuator, NO

IPR3SAD



Curved actuator, NC/NO

IPR5SAD



Flat actuator, NO

IPP3SAD



Flat actuator, NC/NO

IPP5SAD



Also available with straight PC terminals: **IPC3PAD** (NO) or **IPC5PAD** (NC/NO)  
and quick-connect terminals: **IPC3Z1AD** (NO only)

## ROUND - NON ILLUMINATED FLYING LEAD TERMINALS



Curved actuator, NO

IPR3FAD



Curved actuator, NC/NO

IPR5FAD



Flat actuator, NO

IPP3FAD




Flat actuator, NC/NO

IPP5FAD




For THIN flying leads, replace F with W.  
**Wire colors** (NC/NO): black: NO, blue: NC  
Shown with standard flying lead terminals.


→ FLAT

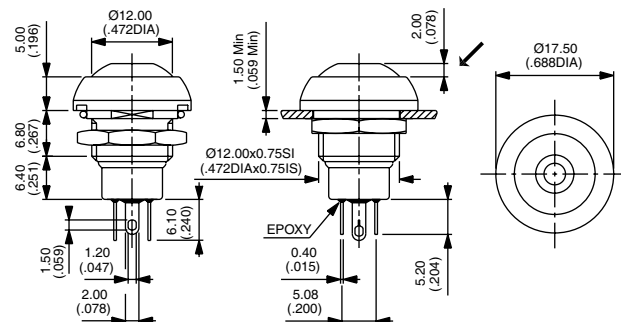


→ FLAT

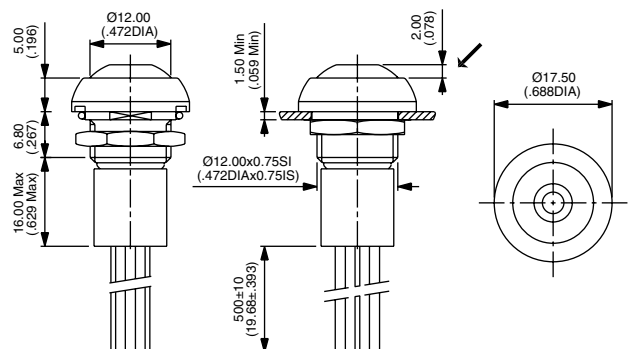

→ FLAT

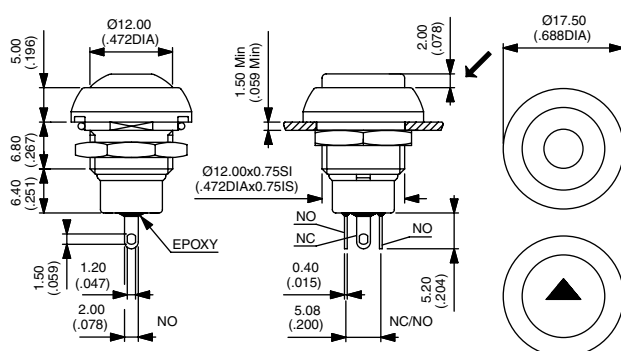

→ FLAT

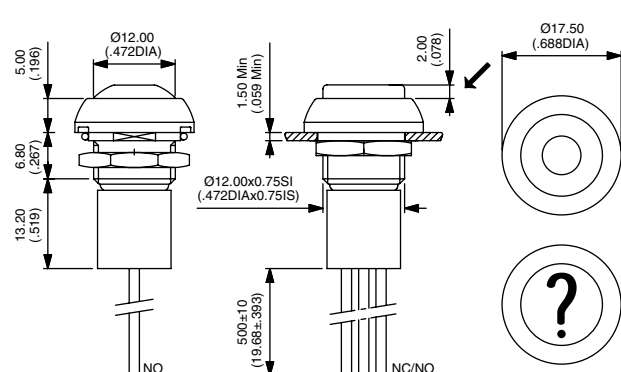

# IP series

Pushbutton switches for harsh environments •  
bushing Ø 12 mm • momentary

## ACTUATOR COLORS

BASIC P/N

1	Blue	6	Red
B	Dark blue	7/1	White
2	Black	8	Bright chrome
3	Green	9	Orange
4	Grey	A	Satin chrome
5	Yellow		

## LED COLORS


BASIC P/N

Blank	Non-illuminated
L0S	Super red
L0Y	Yellow
L0G	Green
L0B	Blue
L0W	White
LSG	Red/green
LYG	Yellow/green

## OPTIONS

BASIC P/N

100	Satin chrome bezel
101	Bright chrome bezel
104	High actuator - For round, non-illuminated only If combined with function 5 (NC/NO), order with CD contacts (instead of AD contacts).

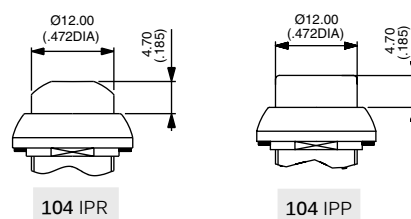

## AGENCY APPROVAL

BASIC P/N

## UL

Consult factory for details of approved models. To order switches marked UL, complete above box with "UL".

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Apem:

[IPR1Z1AD6L0S](#) [IPR1SAD2100](#) [IPR5SAD6104](#) [IPR5SCD6](#) [IPP1SADB170](#) [IPP3SAD8L0G101](#) [IPR1PAD2](#)  
[IPC3SAD1/4](#) [IPR1FAD8L0S](#) [IPR1FADA](#) [IPC3SAD2L0B](#) [IPR1FAD1L0B](#) [IPR5PAD6](#) [IPC1SAD7/1L0G100](#)  
[IPR1WAD3L0G](#) [IPP5PAD2](#) [IPR3FAD2104](#) [IPR3WAD2L0G](#) [IPP5FAD2](#) [IPR5PAD3](#) [IPR3SAD6100](#)  
[IPR3SAD8L0G100](#) [IPR3FAD9104](#) [IPR1FAD2L0B107](#) [IPR3SAD0105](#) [IPR5FAD5100](#) [IPR1WAD4101](#) [IPR3SAD2UL](#)  
[IPP3SAD2L0G](#) [IPR3SAD5104](#) [IPC3SAD7/1L0W](#) [IPC1SAD7/1L0B](#) [IPR1SAD0105](#) [IPP5FAD1](#) [IPP1FAD6](#) [IPP5SAD5](#)  
[IPC3SAD2L0W](#) [IPR3FAD6100](#) [IPR3SAD0L0S105](#) [IPR1Z1AD3L0G](#) [IPR3FAD2LSG](#) [IPP1FAD3](#) [IPC3SAD6L0W](#)  
[IPP3FAD2L0S](#) [IP1651](#)