

TR series

Tiny washable rocker switches

Distinctive features and specifications

UG1006-A



☐ Sealed

- Single piece case
- O-ring seal between actuator and bushing
- Epoxy sealed terminals

☐ Wide variety of contact materials

☐ Same PCB layout as tiny toggle (TL), pushbutton (TP) and slide switches (TG)

ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :
 - gold plated contacts : 0,4VA 20V max. AC or DC
 - silver plated contacts : 0,5A 48V max. AC or DC
- Minimum load : 10mA 50mV - 10 μ A 5VDC
- Contact resistance : 20 m Ω max.
- Insulation resistance : 1.000 M Ω min. at 500VDC
- Dielectric strength :
 - 1.000 Vrms 50 Hz min. between terminals and frame
 - 500 Vrms 50 Hz min. between terminals
- Electrical life at full load :

Contacts	Number of cycles	
	2 positions	3 positions
Gold plated	60.000	30.000
Silver plated	20.000	10.000

MATERIALS

- Case : PBT
- Actuator : polyamide
- Contacts and terminals :
 - 0 : brass, gold plated
 - 1 : brass, silver plated
 - 3 : brass, gold plated (1,27 micron gold)
 - 8 : contact brass, gold plated + tin plated terminals
 - 9 : contact brass, gold plated (1,27 micron gold) + tin plated terminals
- Terminal seal : epoxy

GENERAL SPECIFICATIONS


- Strength of terminals : pull-out force - 10N max.
- Operating temperature : -30°C to +85°C
- Moisture : 21 days 95 % (NFC 20-603 - IEC 68-2-3)
- Cleaning : solvents or water + detergent
- Wave soldering : 260°C - 5 sec.

TR series


Tiny washable rocker switches

Overview

MODEL
STRUCTURE

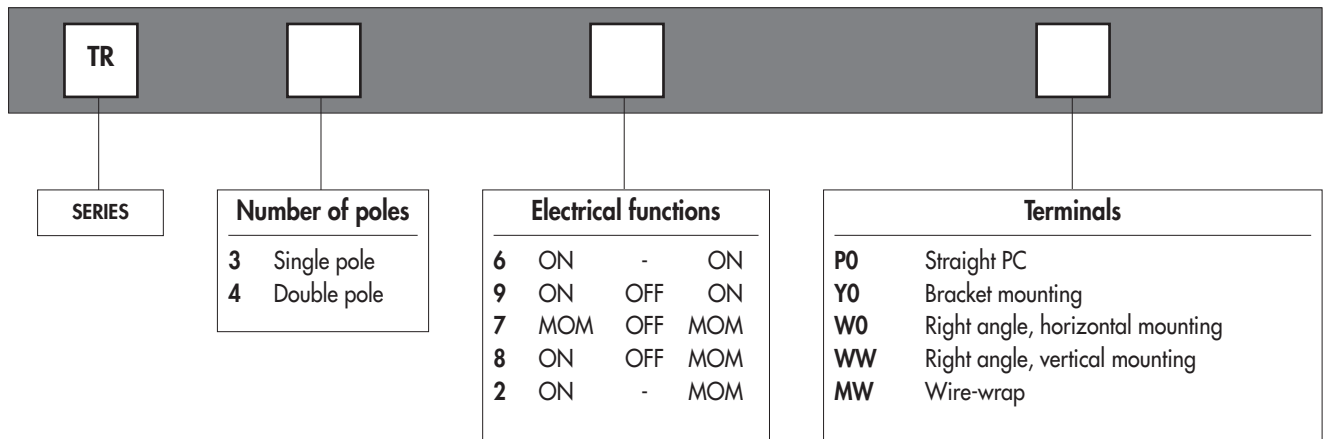

OPTIONS

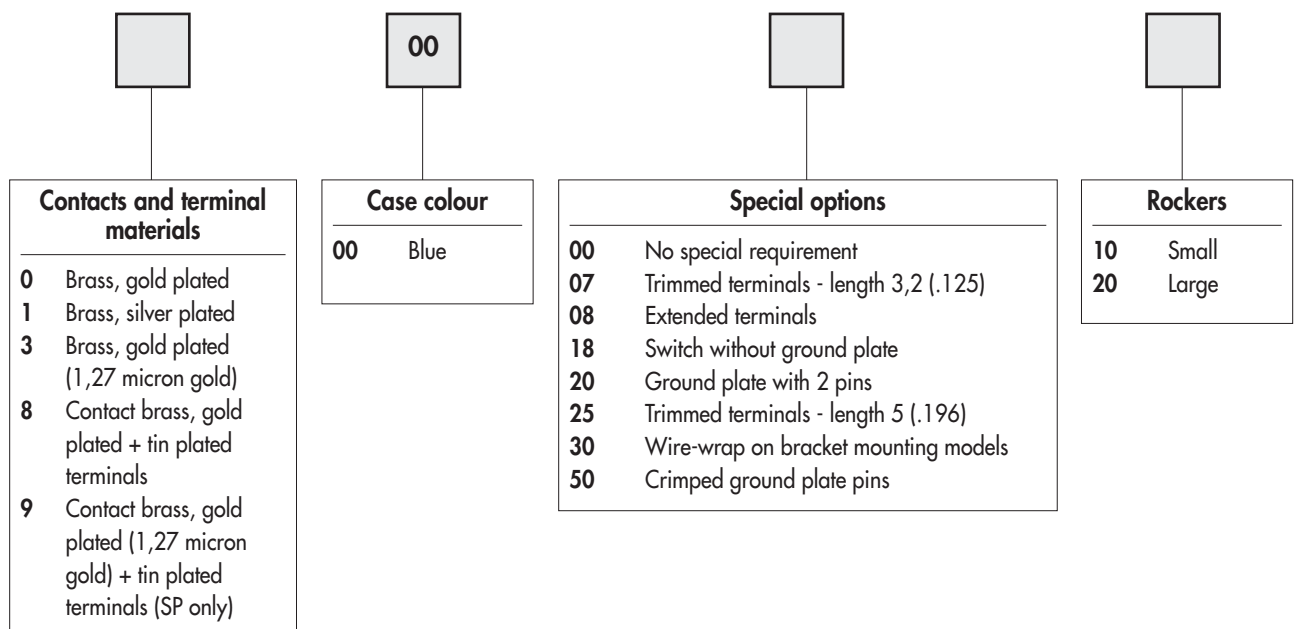

ABOUT THIS SERIES

On the following pages, you will find successively :

- model structure of switches
- options in the same order as in above chart


Dimensions : first dimensions are in mm while inches are shown as bracketted numbers.





NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.




Packaging unit : 50 pieces.



- Straight PC, right angle or wire-wrap terminals
- 1 and 2 pole configurations



MODEL STRUCTURE




Shown with small rocker (code 10)

Straight PC terminals : TR..P0



Single pole	Double pole
TR36P0	TR46P0
TR39P0	TR49P0
TR37P0	TR47P0
TR38P0	TR48P0
TR32P0	TR42P0

III	II	I
ON	-	ON
ON	OFF	ON
MOM	OFF	MOM
ON	OFF	MOM
ON	-	MOM

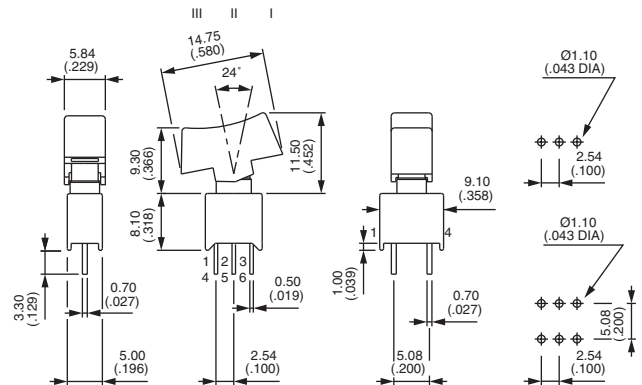


Straight terminals - bracket mounting : TR..Y0



Single pole	Double pole
TR36Y0	TR46Y0
TR39Y0	TR49Y0
TR37Y0	TR47Y0
TR38Y0	TR48Y0
TR32Y0	TR42Y0

III	II	I
ON	-	ON
ON	OFF	ON
MOM	OFF	MOM
ON	OFF	MOM
ON	-	MOM

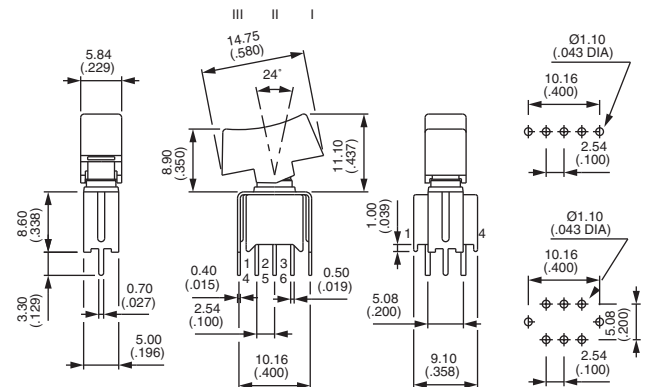


Right angle terminals - horizontal mounting : TR..W0



Single pole	Double pole
TR36W0	TR46W0
TR39W0	TR49W0
TR37W0	TR47W0
TR38W0	TR48W0
TR32W0	TR42W0

III	II	I
ON	-	ON
ON	OFF	ON
MOM	OFF	MOM
ON	OFF	MOM
ON	-	MOM

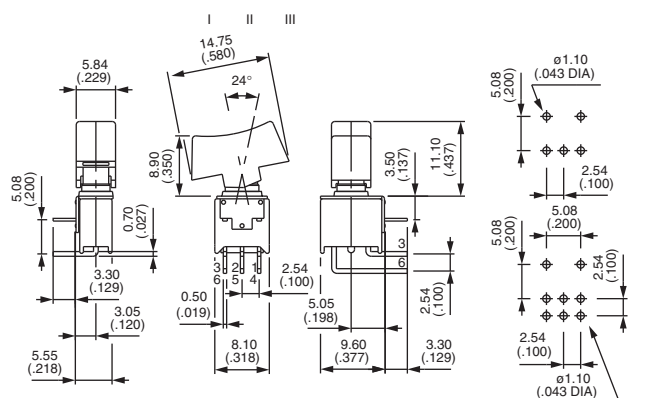




TR series


Tiny washable rocker switches

SPECIAL OPTIONS




- 00** No special requirement
- 07** **Trimmed terminals** - length 3,2 mm (.125) for TR..WW models only
- 08** **Extended terminals** for TR..W0 models only
- 18** Switch **without ground plate** for TR..WW models only
- 20** **Ground plate with 2 pins** for TR..WW models only
- 25** **Trimmed terminals** - length 5 mm (.196) for all models, except TR..WW
- 30** **Wire-wrap terminals** on models with mounting **bracket**
- 50** **Crimping of ground plate pins.**
Retains switch on PCB during handling and wave soldering.
For models TR..W0, TR..WW and TR..Y0 single and double pole.


Marking on rocker : consult factory.




07




08




18




20



25





30




50

ROCKERS

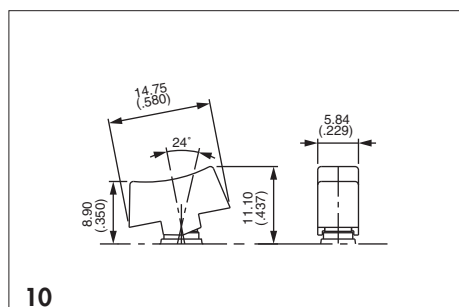

10

Small

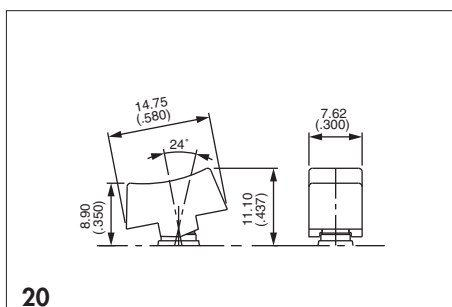

20

Large

Rocker colours

Replace "0" by number

- 1** blue
- 1/4** dark blue
- 2** black
- 3** green
- 4** grey
- 5** yellow
- 6** red
- 7** ivory
- 7/1** white
- 9** orange

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Apem:](#)

[TR39W00005012](#) [TR39WW8002012](#) [TR36W00005012](#) [TR36Y00005012](#) [TR37WW0005012](#) [TR38W00005012](#)
[TR39Y00005012](#) [TR42Y00005012](#) [TR46Y00005012](#) [TR47Y00005012](#) [TR36WW0005012](#)