Snap-in panel mount LED indicators



MD 05.2200

DISTINCTIVE FEATURES

6 mm, 8 mm, 10 mm and 12 mm Ø cut-out sizes Front panel snap-in mounting requires no additional hardware Standard intensity diffused LED or high brightness LED for daylight viewing



GENERAL SPECIFICATIONS

- Operating Temperature Range: -30 °C to +65 °C (-22 °F to +149 °F)
- Max Reverse Voltage: 5 V
- Life Expectancy: 100,000 hours
- Max Panel Thickness: 0.8 to 1.6 mm




MATERIALS

• Moulded polycarbonate




MOUNTING


QS6 SERIES PANEL CUT-OUT




QS10 SERIES PANEL CUT-OUT




QS8 SERIES PANEL CUT-OUT



QS12 SERIES PANEL CUT-OUT











Snap-in panel mount LED indicators



ELECTRICAL SPECIFICATIONS

STANDARD LED INTENSITY

LED COMPONENT SPECIFICATIONS				
	6 mm Intensity	8, 10 & 12 mm Intensity	Forward Voltage	
HE Red	40 mcd	100 mcd	2.0 V	
Green	40 mcd	60 mcd	2.2 V	
Yellow	30 mcd	50 mcd	2.1 V	
Orange	30 mcd	30 mcd	2.5 V	
Blue	1,200 mcd	1,600 mcd	3.8 V	
White (clear)	1,200 mcd	1,600 mcd	3.8 V	
Bi-color (Typical) (Red/Green)	60 mcd	45 mcd	2.0 V	
Tri-color (Typical) (Red/Green/Yellow)	-	60/15/13mcd	2.5 V	

Bi-color - The color is changed by reversing the polarity of the supply voltage.

Tri-color - The indicator has red and green LEDs, when both connected yellow is produced.

HIGH BRIGHTNESS LED INTENSITY

LED COMPONENT SPECIFICATIONS				
	6 mm Intensity	8, 10 & 12 mm Intensity	Forward Voltage	
HE Red	3,700 mcd	6,000 mcd	2.2 V	
Green	2,000 mcd	1,900 mcd	3.2 V	
Yellow	1,200 mcd	2,100 mcd	2.0 V	
Orange	8,000 mcd	4,200 mcd	2.2 V	

- The operating voltage must not be exceeded by more that 10% as this will result in reduced life expectancy
- Luminous intensity is measured at 20 mA on a discrete led unless otherwise stated.
- Luminous intensities and color shades of white LEDs may vary within a batch.
- Luminous intensity will be reduced with lower operating current.


Voltage	Operating Voltage	Operating Current	
	(Min to Max)	(Typical All Types)	
02 (No Resistor)	2.1 to 3.3 VDC	20 mA max*	
6 VDC	5.4 to 6.6 VDC	20 mA	
12 VDC	10.8 to 13.2 VDC	20 mA	
24 VDC	21.6 to 26.4 VDC	20 mA	
28 VDC	25.2 to 30.8 VDC	20 mA	
110 VAC (not available on QS6)	99 to 110 VAC	6 mA	
220 VAC (not available on QS6)	207 to 253 VAC	3 mA	

* Customer to supply resistor for desired operating current.

Snap-in panel mount LED indicators



BUILD YOUR PART NUMBER

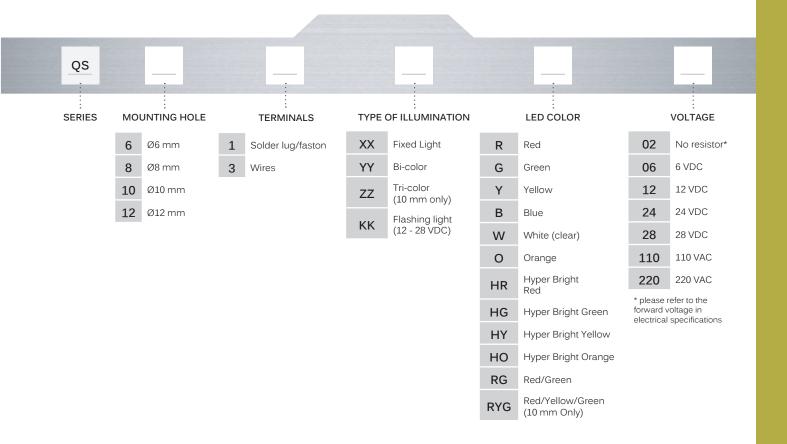



ABOUT THIS SERIES

- Notice: please note that not all combinations of above numbers are available. Not all LED flashing options are available in this range, please contact APEM.
 - Gold solder lug/Faston terminal denotes Anode (+), silver terminal denotes Cathode (-)
 - Standard wire length is 200mm, QS6 & QS8 24 AWG UL1061, QS10 & QS12 22 AWG UL1061, red wire denotes Anode (+), black wire denotes Cathode (-) for other wire lengths consult APEM
 - \bullet For LEDs with alternate voltages and multi-voltage options consult APEM.
 - Bi-color LEDs, by connecting the gold Faston (+) one color is produced, by reversing the supply voltage another color is produced. Bi-color are available up to 28 VDC.
 - Take care when soldering (recommended solder temperature 270 °C 2 sec).
 - The Tri-color LED has red and green LEDs when both are connected yellow is produced
 - We recommend using high brightness LEDs for use at 220 VAC
 - 6 mm not available in 110 VAC or 220 VAC
 - Mains voltage product is not recommended for use on 3 phase appliances

Snap-in panel mount LED indicators

Ø 6 MM - SOLDER LUG TERMINALS



Ø 6 MM - WIRES TERMINALS





Ø 8 MM - SOLDER LUG / FASTON TERMINALS





Ø 8 MM - WIRES TERMINALS



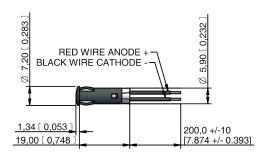

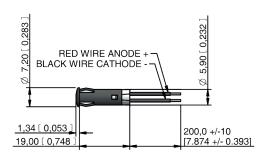

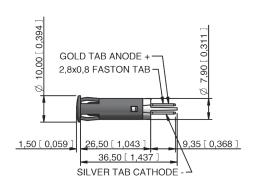

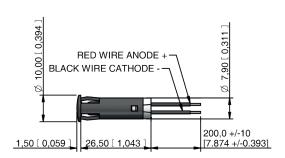

APEM

QS series

Snap-in panel mount LED indicators

Ø 10 MM - SOLDER LUG / FASTON TERMINALS



Ø 10 MM - WIRES TERMINALS





Ø 12 MM - SOLDER LUG / FASTON TERMINALS





Ø 12 MM - WIRES TERMINALS



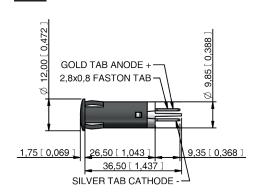

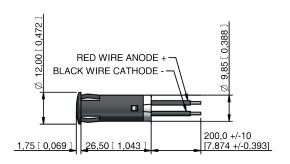

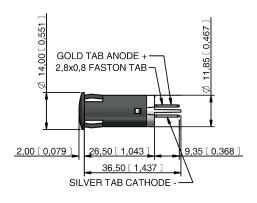

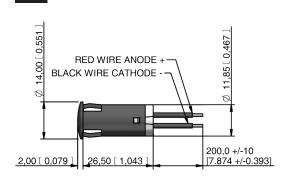

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Apem:

QS83XXHG110 QS63XXG24 QS123XXW24 QS81XXHO110 QS63XXW12 QS81XXG24 QS123XXR12
QS123XXHG220 QS61XXW24 QS81XXG12 QS61XXY12 QS103XXHG110 QS103XXHO110 QS103XXHR220
QS83XXHG220 QS103XXR12 QS123XXHB220 QS61XXW12 QS63XXW24 QS103XXHW220 QS63XXR24
QS83XXHY110 QS103XXW24 QS101XXO24 QS123XXHO220 QS123XXW12 QS63XXY12 QS83XXHW220
QS103XXW12 QS81XXB24 QS61XXR12 QS63XXY24 QS83XXHR220 QS103XXHY110 QS121XXHG220
QS81XXR12 QS83XXY24 QS121XXO12 QS81XXHW220 QS101XXO12 QS81XXY12 QS101XXHW220
QS121XXO24 QS81XXW12 QS123XXHW110 QS83XXHY220 QS101XXHG110 QS123XXHY220 QS63XXB24
QS61XXB12 QS81XXW24 QS81XXR24 QS83XXHO220 QS121XXHY110 QS81XXHW110 QS103XXHB110
QS81XXHR110 QS103XXHG220 QS121XXG24 QS83XXHO220 QS121XXHW110 QS81XXB12 QS81XXO12 QS121XXHY220
QS103XXHB220 QS81XXO24 QS101XXG24 QS83XXG12 QS83XXHB220 QS101XXG12 QS83XXG24
QS101XXHY110 QS121XXG12 QS121XXY24 QS63XXR12 QS81XXHG110 QS101XXB24 QS121XXHG110
QS83XXB24 QS81XXHB110 QS83XXB12 QS121XXB24 QS101XXY24 QS121XXHW110 QS123XXHY110
QS83XXB24 QS81XXHB110 QS83XXB12 QS121XXB24 QS101XXY24 QS121XXHW110 QS123XXHY110
QS81XXHY220 QS101XXY12 QS103XXHO220 QS121XXB12 QS101XXB12 QS121XXHR110 QS121XXY12
QS121XXHO220 QS101XXY12 QS103XXHO220 QS121XXB12 QS101XXB12 QS121XXHR110 QS123XXHY110
QS81XXHB220 QS101XXY12 QS103XXHO220 QS121XXB12 QS101XXB12 QS121XXHR110 QS123XXHY110
QS81XXHB220 QS101XXY12 QS103XXHO220 QS121XXB12 QS101XXB12 QS121XXHR110 QS123XXHY110