



500W True Sine Wave DC-AC Inverter with MPPT Solar Charger

ISI-501 series



Input



User's Manual



AC Output



Features

- True sine wave output (THD<3%)
- High surge power up to 1000W
- High efficiency up to 88%
- High frequency design
- Thermostatically controlled cooling fan
- Protections: Bat. low alarm / Bat. low shutdown / Over voltage / Over temp. / Output short / Input polarity reverse / Overload
- Built-in 500W MPPT solar charger, MPPT efficiency:98%(Typ.)
- Built-in remote ON-OFF control
- Built-in battery low relay contact
- LED indicator for operation status and battery capacity
- 3 years warranty

Applications

- Home appliance
- Power tools
- Portable equipment
- Yacht
- Vehicle

Description

ISI-501 series integrates a DC/AC True Sine Wave Inverter and a MPPT charger. This series is a high performance true sine wave DC/AC inverter which converts the DC electricity from a system consisting of batteries and solar panels. ISI-501 is not only a high frequency designed inverter but also fully digitally controlled by an advanced microprocessor. With true sine wave output, ISI-501 series can provide 500W continuously, 550W for 60 seconds, and 1000W for 30 AC-cycles. This series incorporates a MPPT solar charger, including the constant current and constant voltage charging characteristics.

Model Encoding

ISI - 501 - 112 - A

Bat. Voltage { 12:12VDC
24:24VDC
48:48VDC

AC Output Voltage { 1:110VAC
2:230VAC

Output Wattage

Series Name

AC Output
Receptacle







A :TYPE A OUTLET
B :TYPE B OUTLET
C :TYPE C OUTLET
D :TYPE D OUTLET
F :TYPE F OUTLET
U :TYPE U OUTLET



500W True Sine Wave DC-AC Inverter with MPPT Solar Charger

ISI-501 series


AC Output Receptacles(Optional)

Receptacle type						
	TYPE-A	TYPE-B	TYPE-C	TYPE-D	TYPE-F	TYPE-U
	Standard	Standard	Optional	Optional	Optional	Optional
Country	USA	EUROPE	AUSTRALIA	U.K	GFCI (60Hz)	UNIVERSAL
Certificate	FC	CE	CE	CE	FC	None



SPECIFICATION

MODEL			ISI-501-112	ISI-501-124	ISI-501-148	ISI-501-212	ISI-501-224	ISI-501-248	
INVERTER SECTION	OUTPUT	RATED POWER	450W	500W		450W	500W		
		MAXIMUM OUTPUT POWER (Typ.)	550W for 60 sec. / surge power 1000W for 30 cycles (112, 212 models : 495W for 60 sec. / surge power 900W for 30 cycles)						
		AC VOLTAGE	Factory setting set at 110VAC 100 / 110 / 115 / 120VAC selectable by setting button S.W				Factory setting set at 230VAC 200 / 220 / 230 / 240VAC selectable by setting button S.W		
		FREQUENCY	Factory setting set at 110VAC 60±0.1Hz 50/60Hz selectable by setting button S.W				Factory setting set at 230VAC 50±0.1Hz 50/60Hz selectable by setting button S.W		
		WAVEFORM	True sine wave (THD<3%)						
		AC REGULATION (Typ.)	±3%						
		FRONT PANEL INDICATOR	Fault and operation status, Charger status, Battery capacity						
	INPUT	BAT. VOLTAGE	12V	24V	48V	12V	24V	48V	
		VOLTAGE RANGE	10.5 ~ 15VDC	21 ~ 30VDC	42 ~ 60VDC	10.5 ~ 15VDC	21 ~ 30VDC	42 ~ 60VDC	
		DC CURRENT	50A	30A	15A	50A	30A	15A	
		NO LOAD CURRENT DRAW (Typ.)	1.25A	0.63A	0.32A	1.25A	0.63A	0.32A	
		OFF MODE CURRENT DRAW (Typ.)	≤1mA						
	OUTPUT PROTECTION	EFFICIENCY (Typ.)	85%	87%	87%	86%	88%	88%	
		OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover						
		OUTPUT SHORT	Shut down o/p voltage, re-power on to recover						
		OVER LOAD (Typ.)	110% load for 60 sec. Protection type : Shut down o/p voltage, re-power on to recover						
BATTERY SECTION		CHARGER CURRENT (Typ.)	30A	17A	8.5A	30A	17A	8.5A	
		BATTERY TYPE	Open & sealed Lead Acid						
		FUSE	40A*2	40A*1	20A*1	40A*2	40A*1	20A*2	
		BAT. LOW ALARM	11.3V	22.5V	45V	11.3V	22.5V	45V	
		BAT. LOW SHUTDOWN	10.5V	21V	42V	10.5V	21V	42V	
		REVERSE POLARITY	By internal fuse open						
MPPT / SOLAR SECTION		MPPT CHARGER EFFICIENCY (Typ.)	98%						
		OPEN CIRCUIT VOLTAGE RANGE	35 ~ 50V	45 ~ 90V	90 ~ 160V	35 ~ 50V	45 ~ 90V	90 ~ 160V	
		MPPT RANGE	25 ~ 50V	35 ~ 90V	70 ~ 160V	25 ~ 50V	35 ~ 90V	70 ~ 160V	
		SOLAR INPUT CURRENT (Typ.)	11A	7A	4.5A	11A	7A	4.5A	
		SOLAR INPUT POWER (Typ.)	500W						
GENERAL SECTION	ENVIRONMENT	WORKING TEMP.	-20 ~ +40°C @ 100% load ; 60°C @ 50% load						
		WORKING HUMIDITY	20% ~ 90% RH non-condensing						
		STORAGE TEMP., HUMIDITY	-30 ~ +70°C / -22 ~ +158°F, 10 ~ 95% RH non-condensing						
		VIBRATION	10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes						
	SAFETY & EMC	SAFETY STANDARDS	IEC62368-1 CB, EAC TP TC 004 approved; Meet BS EN/EN62368-1						
		WITHSTAND VOLTAGE	Bat I/P - AC O/P:3.0KVAC AC O/P - FG:1.5KVAC						
		ISOLATION RESISTANCE	Bat I/P - AC O/P, Bat I/P - FG, AC O/P - FG: 100M ohms / 500VDC / 25°C / 70% RH						
		EMC EMISSION	Compliance to FCC part 15 class B, EAC TP TC 020				Compliance to BS EN/EN55032 class B, EAC TP TC 020		
		EMC IMMUNITY	Compliance to EAC TP TC 020				Compliance to BS EN/EN61000-4-2,3,8, EAC TP TC 020		
	OTHERS	MTBF	57.8K hrs min. MIL-HDBK-217F (25°C)						
		DIMENSION	205*158*67mm (L*W*H)						
PACKING		2.35Kg; 6pcs/15.1Kg/1.55CUFT							
NOTE		1.THD is tested by rated power, linear load at 13V,26V,52V input voltage. 2.Efficiency is tested by 350W, linear load at 13V,26V,52V input voltage. 3.The tolerance of each voltage value by models is : 112/212→±0.5V ; 124/224→±1V ; 148/248→±2V. 4.Output derating capacity referenced by curve 1. 5.Input derating capacity referenced by curve 2. 6.All parameters not specified above are measured at rated load, 25°C of ambient temperature and set to factory setting. 7.DC current is tested by 500W, linear load at 12V,24V,48V input voltage. 8.The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 9.Type F for 60Hz only.							


Block Diagram

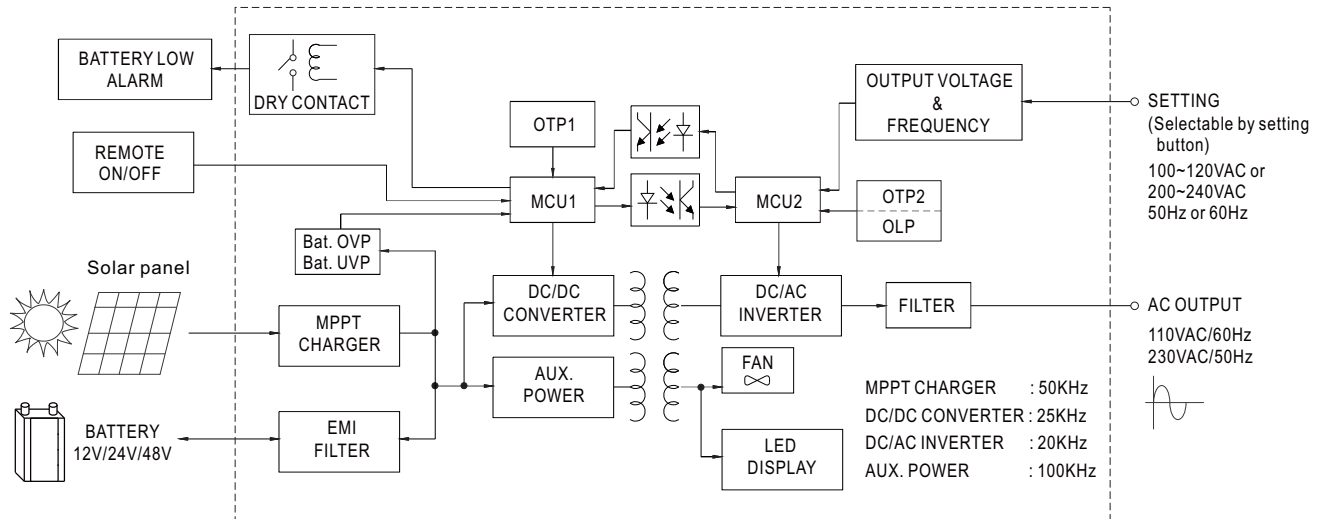

Derating Curve

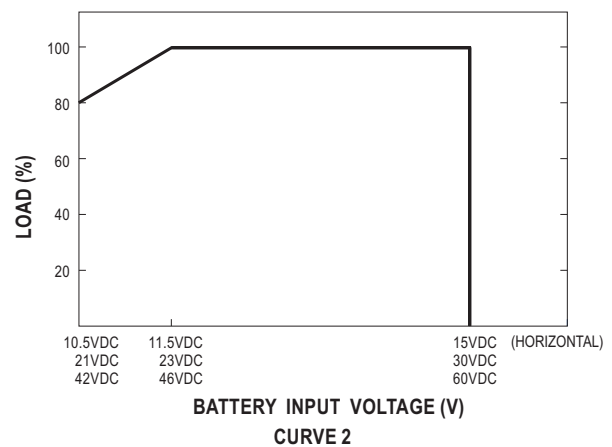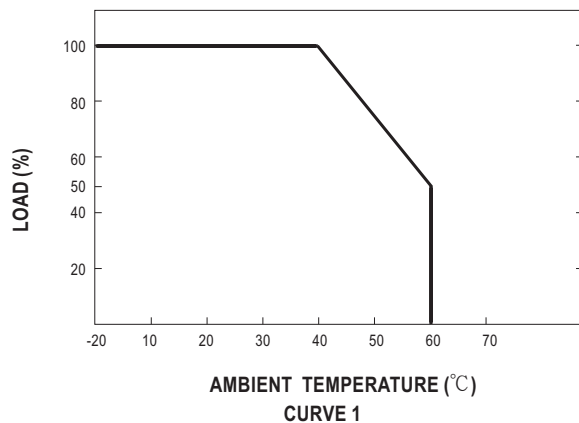

Charging Curve

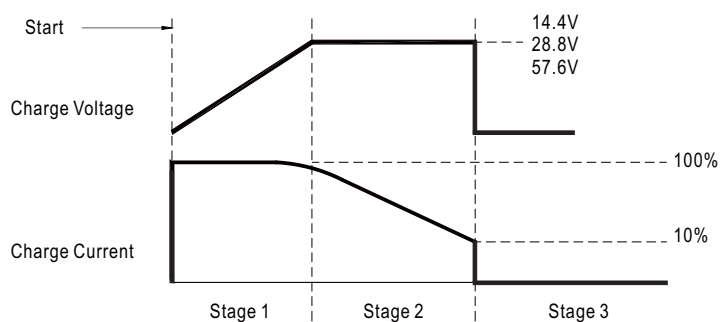

Stage 1 : Constant Current
 Stage 2 : Constant Voltage
 Stage 3 : MPPT Charger OFF

*Constant current condition : Dependent on solar input current and MPPT voltage of solar panel.

*MPPT charger OFF condition: Charge current less than 10% rated charge current and solar input power under 50W.




Mechanical Specification

Case No.805

Unit:mm


Input Terminal Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment
1	Battery Input NEG(-)	5	FG $\perp$
2	Battery Input POS(+)	6	Bat. Low Alarm Connector
3	Solar Input NEG(-)	7	Remote ON/OFF Connector
4	Solar Input POS(+)		

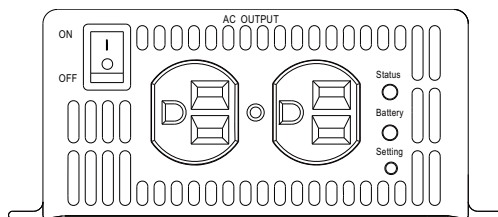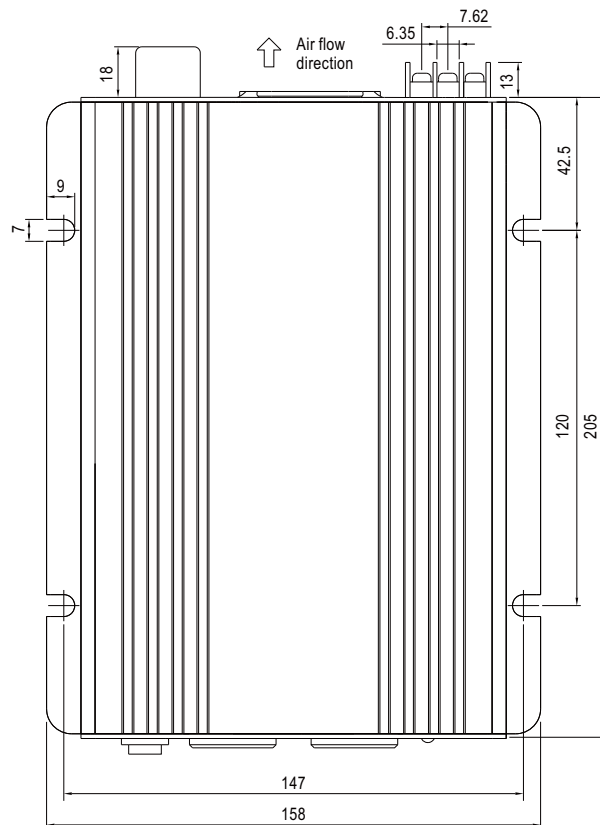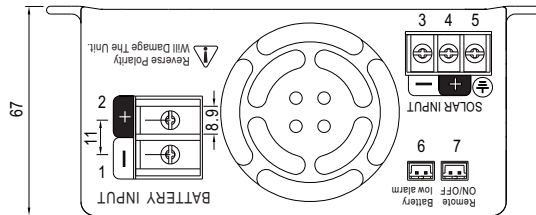

Type-A

Function Manual




Remote ON/OFF Connector

Remote ON/OFF Connector :
JST B-XH or equivalent

Open	Normal work
Short	Remote off


Relay dry contact Contact Rating :
1A @ 24VDC resistive



Bat. Low Alarm Connector

Bat. Low Alarm Connector :
JST B-XH or equivalent

Open	Battery low
Short	Battery OK

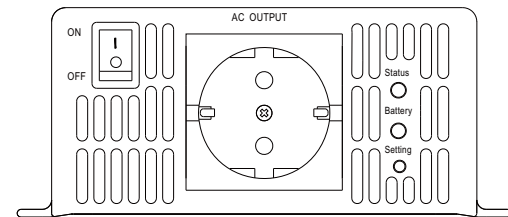

Type-B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

MEAN WELL:

[ISI-501-212C](#) [ISI-501-148E](#) [ISI-501-112E](#) [ISI-501-112A](#) [ISI-501-212D](#) [ISI-501-212B](#) [ISI-501-224D](#) [ISI-501-124E](#)
[ISI-501-248D](#) [ISI-501-148A](#) [ISI-501-248B](#) [ISI-501-224C](#) [ISI-501-248C](#) [ISI-501-124A](#) [ISI-501-224B](#)