DSC8102 | DSC8122




Programmable Low-Jitter Precision LVPECL Oscillator

General Description

The DSC8102 & DSC8122 series of high performance field-programmable oscillators utilizes a proven silicon MEMS technology to provide excellent jitter and stability over a of supply voltages wide range and temperatures. Using the TIMEFLASH programmer, the end user can easily program the oscillators' frequency in the field for immediate testing or use in advance prototype development or production.

DSC8102 has a standby feature allowing it to completely power-down when EN pin is pulled low; whereas for DSC8122, only the outputs are disabled when EN is low. Both oscillators are available in industry standard packages, including the small 3.2x2.5 mm², and are "drop-in" replacement for standard 6-pin LVPECL guartz oscillators.

Block Diagram

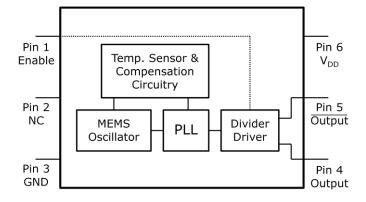

Output Enable Modes

EN Pin	DSC8102	DSC8122
High	Outputs Active	Outputs Active
NC	Outputs Active	Outputs Active
Low	Standby	Outputs Disabled

Features

- Low RMS Phase Jitter: <1 ps (typ)
- High Stability: ±10, ±25, ±50 ppm
- Wide Temperature Range Industrial: -40° to 85° C Ext. commercial: -20° to 70° C
- High Supply Noise Rejection: -50 dBc
- Wide Freq. Range: 10 to 460 MHz
- Small Industry Standard Footprints o 2.5x2.0, 3.2x2.5, 5.0x3.2, & 7.0x5.0 mm
- Excellent Shock & Vibration Immunity Qualified to MIL-STD-883
- High Reliability 20x better MTF than guartz oscillators
- Low Current Consumption
- Supply Range of 2.25 to 3.6 V
- Standby & Output Enable Function
- Lead Free & RoHS Compliant
- LVDS & HCSL Versions Available

Applications

- Storage Area Networks SATA, SAS, Fibre Channel
- Passive Optical Networks o EPON, 10G-EPON, GPON, 10G-PON
- Ethernet 1G, 10GBASE-T/KR/LR/SR, and FCoE
- HD/SD/SDI Video & Surveillance
- PCI Express: Gen 1 & Gen 2
- DisplayPort

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 1 |

Ordering Code

Enable Modes

0: Enable/Standby

DSC81 0 **2** C I 5

2: Enable/Disable

<u>Package</u> A: 7.0x5.0mm

B: 5.0x3.2mm

C: 3.2x2.5mm

D: 2.5x2.0 mm



Packing

T: Tape & Reel

Т

: Tube ſ

Temp Range

E: -20 to 70

I: -40 to 85

_

Stability

1: ±50ppm

2: ±25ppm 5: ±10ppm

Absolute Maximum Ratings

Item	Min	Max	Unit	Condition
Supply Voltage	-0.3	+4.0	V	
Input Voltage	-0.3	V _{DD} +0.3	V	
Junction Temp	-	+150	°C	
Storage Temp	-55	+150	°C	
Soldering Temp	-	+260	°C	40sec max.
ESD	-		V	
HBM		4000		
MM		400		
CDM		1500		

Note: 1000+ years of data retention on internal memory

Specifications

pecifications						
Parameter		Condition	Min.	Typ.	Max.	Unit
Supply Voltage ¹	V_{DD}		2.25		3.6	V
Supply Current	I _{DD}	EN pin low – outputs are disabled DSC8102 DSC8122		20	0.095 22	mA
Frequency Stability	Δf	Includes frequency variations due to initial tolerance, temp. and power supply voltage			±10 ±25 ±50	ppm
Aging	Δf	1 year @25°C			±5	ppm
Startup Time ²	t _{s∪}	T=25°C			5	ms
Input Logic Levels Input logic high Input logic low	V _{IH} V _{IL}		0.75xV _{DD} -		- 0.25xV _{DD}	V
Output Disable Time ³	t _{DA}				5	ns
Output Enable Time	t _{EN}	DSC8102 DSC8122			5 20	ms ns
Enable Pull-Up Resistor ⁴		Pull-up resistor exist		40		kΩ
		LVPECL Outputs				
Supply Current	I_{DD}	Output Enabled, R_L =50 Ω		56.5	58	mA
Output Logic Levels Output logic high Output logic low	V _{OH} V _{OL}	$R_L=50\Omega$	V _{DD} -1.08 -		- V _{DD} -1.55	V
Pk to Pk Output Swing		Single-Ended		800		mV
Output Transition time ³ Rise Time Fall Time	t _R t _F	20% to 80% $R_L = 50\Omega, C_L = 0pF$		250		ps
Frequency	f ₀	Single Frequency	10		460	MHz
Output Duty Cycle	SYM	Differential	48		52	%
Period Jitter	J _{PER}			2.5		ps _{RMS}
Integrated Phase Noise	Ј _{РН}	200kHz to 20MHz @156.25MHz 100kHz to 20MHz @156.25MHz 12kHz to 20MHz @156.25MHz		0.25 0.38 1.7	2	ps _{RMS}

Notes:

Pin 6 $V_{\mbox{\scriptsize DD}}$ should be filtered with 0.1uf capacitor. 1.

 t_{D} is time to 100ppm of output frequency after V_{\text{DD}} is applied and outputs are enabled. Output Waveform and Test Circuit figures below define the parameters. 2.


3.

Output is enabled if pad is floated or not connected. 4.

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 2 |

MICREL


Nominal Performance Parameters (Unless specified otherwise: T=25° C, V_{DD}=3.3 V)

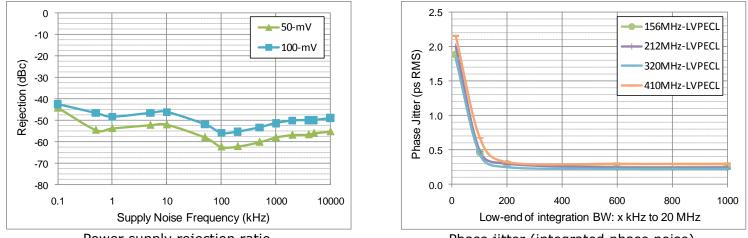


Power supply rejection ratio

Phase jitter (integrated phase noise)

Output Waveform

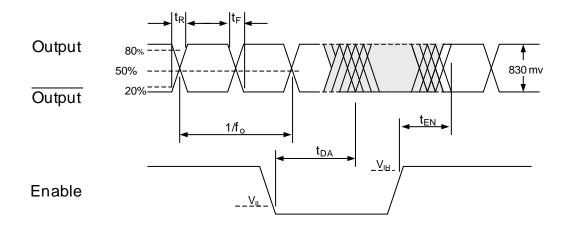


Typical Termination Scheme

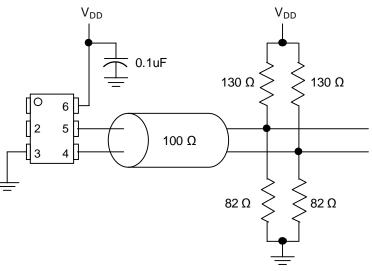


All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 3 |



Test Circuit

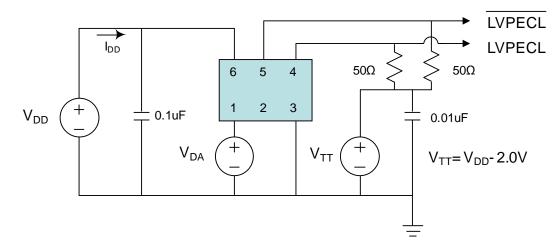

Solder Reflow Profile

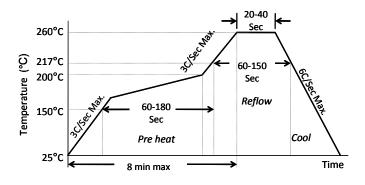


MSL 1 @ 260°C refer to JSTD-020C					
Ramp-Up Rate (200°C to Peak Temp)	3°C/Sec Max.				
Preheat Time 150°C to 200°C	60-180 Sec				
Time maintained above 217°C	60-150 Sec				
Peak Temperature	255-260°C				
Time within 5°C of actual Peak	20-40 Sec				
Ramp-Down Rate	6°C/Sec Max.				
Time 25°C to Peak Temperature	8 min Max.				

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 4 | MK-Q-B-P-D-110410-02-2


MICREL

Package Dimensions

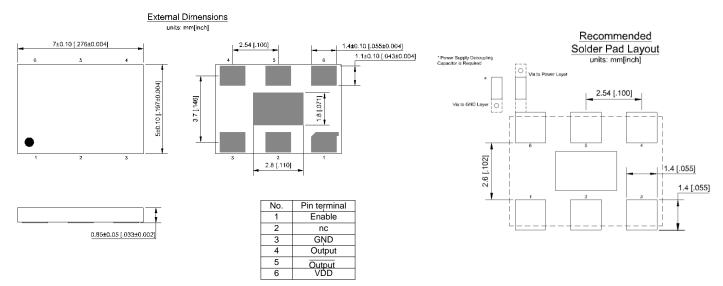

7.0 x 5.0 mm Plastic Package


5.0 x 3.2 mm Plastic Package

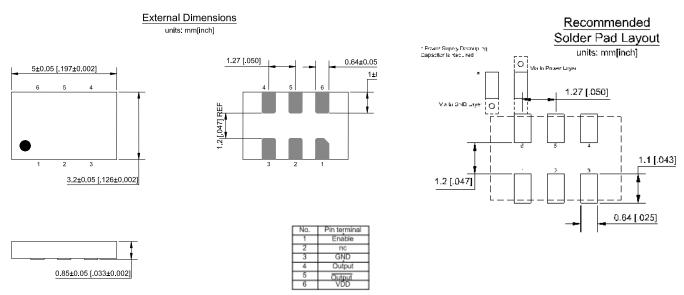

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 5 |


Programmable Low-Jitter Precision LVPECL Oscillator

MICREL

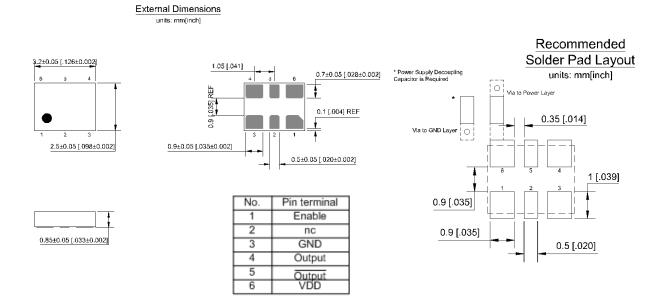

3.2 x 2.5 mm Plastic Package



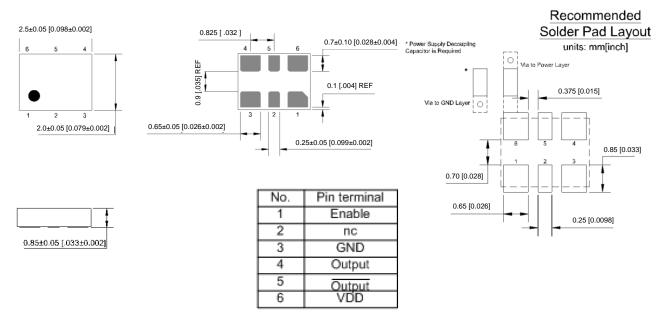

Disclaimer:

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

MICREL, Inc.	•	2180 Fortune Drive,	San Jose, California 95	5131	•	USA
Phone: +1 (408) 944-0800	•	Fax: +1 (408) 474-1000	Email: hbwhelp@micrel.co	om	•	www.micrel.com

All Rights Reserved. No part of this document may be copied or reproduced in any form without the prior written permission of Micrel, Inc. Micrel Inc. may update or make changes to the contents, products, programs or services described at any time without notice. This document neither states nor implies any kind of warranty, including, but not limited to implied warranties of merchantability or fitness for a particular use. Page 6 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

DSC8122AL2 DSC8102BI2T DSC8122BI5T DSC8102CI2T DSC8122CL2 DSC8122CL2T