


# MSC017SMA120J Silicon Carbide N-Channel Power MOSFET

## Product Overview

The silicon carbide (SiC) power MOSFET product line from Microsemi increases the performance over silicon MOSFET and silicon IGBT solutions while lowering the total cost of ownership for high-voltage applications. The MSC017SMA120J device is a 1200 V, 17 mΩ SiC MOSFET in a SOT-227 package.

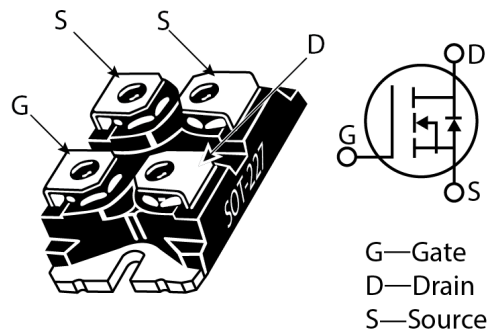

### Features

The following are key features of the MSC017SMA120J device:

- Low capacitances and low gate charge
- Fast switching speed due to low internal gate resistance (ESR)
- Stable operation at high junction temperature,  $T_{J(max)} = 175\text{ }^{\circ}\text{C}$
- Fast and reliable body diode
- Superior avalanche ruggedness
- RoHS compliant
- Isolated voltage to 2500 V

### Benefits

The following are benefits of the MSC017SMA120J device:

- High efficiency to enable lighter, more compact system
- Simple to drive and easy to parallel
- Improved thermal capabilities and lower switching losses
- Eliminates the need for external freewheeling diode
- Lower system cost of ownership

### Applications

The MSC017SMA120J device is designed for the following applications:

- PV inverter, converter, and industrial motor drives
- Smart grid transmission and distribution
- Induction heating and welding
- H/EV powertrain and EV charger
- Power supply and distribution

## Device Specifications

This section shows the specifications of the MSC017SMA120J device.

### Absolute Maximum Ratings

The following table shows the absolute maximum ratings of the MSC017SMA120J device.

**Table 1 • Absolute Maximum Ratings**

| Symbol   | Parameter   | Ratings   | Unit                  |
|----------|---|-----------|-----------------------|
| $V_{DS}$ | Drain source voltage  | 1200      | V                     |
| $I_D$    | Continuous drain current at $T_C = 25\text{ }^{\circ}\text{C}$  | 88        | A                     |
|          | Continuous drain current at $T_C = 100\text{ }^{\circ}\text{C}$ | 62        |                       |
| $I_{DM}$ | Pulsed drain current <sup>1</sup>                               | 280       |                       |
| $V_{GS}$ | Gate-source voltage   | 23 to -10 | V                     |
| $P_D$    | Total power dissipation at $T_C = 25\text{ }^{\circ}\text{C}$   | 278       | W                     |
|          | Linear derating factor  | 3.33      | W/ $^{\circ}\text{C}$ |

**Note:**

1. Repetitive rating: pulse width and case temperature limited by maximum junction temperature.

The following table shows the thermal and mechanical characteristics of the MSC017SMA120J device.

**Table 2 • Thermal and Mechanical Characteristics**

| Symbol          | Characteristic   | Min  | Typ  | Max  | Unit   |
|-----------------|--|------|------|------|--------|
| $R_{\theta JC}$ | Junction-to-case thermal resistance  |      | 0.36 | 0.54 | °C/W   |
| $T_J$           | Operating junction temperature   | −55  |      | 175  | °C     |
| $T_{STG}$       | Storage temperature  | −55  |      | 150  |        |
| $T_L$           | Soldering temperature for 10 seconds (1.6 mm from case)                                    |      |      | 300  | °C     |
| $V_{ISOLATION}$ | RMS voltage (50 Hz–60 Hz sinusoidal waveform from terminals to mounting base for 1 minute) | 2500 |      |      | V      |
|                 | Mounting torque, M4 screw  |      |      | 10   | lbf-in |
|                 |  |      |      | 1.1  | N-m    |
| Wt              | Package weight   |      | 1.03 |      | oz     |
|                 |  |      | 29.2 |      | g      |

## Electrical Performance

The following table shows the static characteristics of the MSC017SMA120J device.  $T_J = 25\text{ °C}$  unless otherwise specified.

**Table 3 • Static Characteristics**

| Symbol                         | Characteristic                          | Test Conditions   | Min  | Typ  | Max  | Unit          |
|--------------------------------|---|---|------|------|------|---------------|
| $V_{(BR)DSS}$                  | Drain-source breakdown voltage          | $V_{GS} = 0\text{ V}$ , $I_D = 100\text{ }\mu\text{A}$                    | 1200 |      |      | V             |
| $R_{DS(on)}$                   | Drain-source on resistance <sup>1</sup> | $V_{GS} = 20\text{ V}$ , $I_D = 40\text{ A}$                              |      | 17.6 | 22   | mΩ            |
| $V_{GS(th)}$                   | Gate-source threshold voltage           | $V_{GS} = V_{DS}$ , $I_D = 4.5\text{ mA}$                                 | 1.9  | 2.7  |      | V             |
| $\Delta V_{GS(th)}/\Delta T_J$ | Threshold voltage coefficient           | $V_{GS} = V_{DS}$ , $I_D = 4.5\text{ mA}$                                 |      | −4.6 |      | mV/°C         |
| $I_{DSS}$                      | Zero gate voltage drain current         | $V_{DS} = 1200\text{ V}$ , $V_{GS} = 0\text{ V}$                          |      |      | 100  | $\mu\text{A}$ |
|                                |   | $V_{DS} = 1200\text{ V}$ , $V_{GS} = 0\text{ V}$<br>$T_J = 125\text{ °C}$ |      |      | 500  |               |
| $I_{GSS}$                      | Gate-source leakage current             | $V_{GS} = 20\text{ V}/-10\text{ V}$                                       |      |      | ±100 | nA            |

**Note:**

1. Pulse test: pulse width < 380  $\mu\text{s}$ , duty cycle < 2%.

The following table shows the dynamic characteristics of the MSC017SMA120J device.  $T_J = 25^\circ\text{C}$  unless otherwise specified.

**Table 4 • Dynamic Characteristics**

| Symbol       | Characteristic                 | Test Conditions  | Min | Typ  | Max | Unit          |
|--------------|--------------------------------|--|-----|------|-----|---------------|
| $C_{iss}$    | Input capacitance              | $V_{GS} = 0\text{ V}$ , $V_{DD} = 1000\text{ V}$<br>$V_{AC} = 25\text{ mV}$ , $f = 1\text{ MHz}$   |     | 5280 |     | pF            |
| $C_{rss}$    | Reverse transfer capacitance   |  |     | 12   |     |               |
| $C_{oss}$    | Output capacitance             |  |     | 265  |     |               |
| $Q_g$        | Total gate charge              | $V_{GS} = -5\text{ V}/20\text{ V}$ , $V_{DD} = 800\text{ V}$<br>$I_D = 40\text{ A}$  |     | 249  |     | nC            |
| $Q_{gs}$     | Gate-source charge             |  |     | 63   |     |               |
| $Q_{gd}$     | Gate-drain charge              |  |     | 32   |     |               |
| $t_{d(on)}$  | Turn-on delay time             | $V_{DD} = 800\text{ V}$ , $V_{GS} = -5\text{ V}/20\text{ V}$ ,<br>$I_D = 50\text{ A}$ , $R_{g(ext)} = 4.0\ \Omega$ ,<br>Freewheeling diode =<br>MSC017SMA120J ( $V_{GS} = -5\text{ V}$ ) |     | TBD  |     | ns            |
| $t_f$        | Voltage fall time              |  |     | TBD  |     |               |
| $t_{d(off)}$ | Turn-off delay time            |  |     | TBD  |     |               |
| $t_r$        | Voltage rise time              |  |     | TBD  |     |               |
| $E_{on}$     | Turn-on switching energy       |  |     | TBD  |     | $\mu\text{J}$ |
| $E_{off}$    | Turn-off switching energy      |  |     | TBD  |     |               |
| $t_{d(on)}$  | Turn-on delay time             | $V_{DD} = 800\text{ V}$ , $V_{GS} = -5\text{ V}/20\text{ V}$ ,<br>$I_D = 50\text{ A}$ , $R_{g(ext)} = 4.0\ \Omega$<br>Freewheeling diode =<br>MSC050SDA120B                              |     | TBD  |     | ns            |
| $t_f$        | Voltage fall time              |  |     | TBD  |     |               |
| $t_{d(off)}$ | Turn-off delay time            |  |     | TBD  |     |               |
| $t_r$        | Voltage rise time              |  |     | TBD  |     |               |
| $E_{on}$     | Turn-on switching energy       |  |     | TBD  |     | $\mu\text{J}$ |
| $E_{off}$    | Turn-off switching energy      |  |     | TBD  |     |               |
| ESR          | Equivalent series resistance   | $f = 1\text{ MHz}$ , $25\text{ mV}$ , drain short  |     | 0.71 |     | $\Omega$      |
| SCWT         | Short circuit withstand time   | $V_{DS} = 960\text{ V}$ , $V_{GS} = 20\text{ V}$   |     | 3    |     | $\mu\text{s}$ |
| $E_{AS}$     | Avalanche energy, single pulse | $V_{DS} = 150\text{ V}$ , $I_D = 30\text{ A}$  |     | 3500 |     | mJ            |


The following table shows the body diode characteristics of the MSC017SMA120J device.  $T_J = 25\text{ }^{\circ}\text{C}$  unless otherwise specified.

**Table 5 • Body Diode Characteristics**


| Symbol    | Characteristic           | Test Conditions  | Min | Typ | Max | Unit |
|-----------|--------------------------|--|-----|-----|-----|------|
| $V_{SD}$  | Diode forward voltage    | $I_{SD} = 40\text{ A}$ , $V_{GS} = 0\text{ V}$   |     | 3.5 |     | V    |
|           |                          | $I_{SD} = 40\text{ A}$ , $V_{GS} = -5\text{ V}$  |     | 3.9 |     | V    |
| $t_{rr}$  | Reverse recovery time    | $I_{SD} = 50\text{ A}$ , $V_{GS} = -5\text{ V}$ ,<br>Drive $R_g = 4\text{ }\Omega$<br>$V_{DD} = 800\text{ V}$ , $dI/dt = -2500\text{ A}/\mu\text{s}$ |     | 40  |     | ns   |
| $Q_{rr}$  | Reverse recovery charge  |  |     | 490 |     | nC   |
| $I_{RRM}$ | Reverse recovery current |  |     | 22  |     | A    |

## Typical Performance Curves

This section shows the typical performance curves of the MSC017SMA120J device.

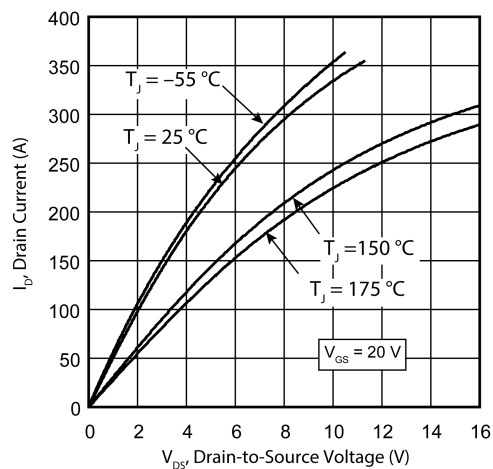

**Figure 1 • Drain Current vs.  $V_{DS}$**

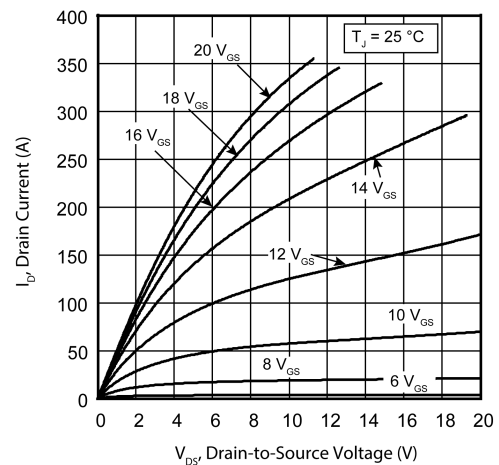

**Figure 2 • Drain Current vs.  $V_{DS}$**

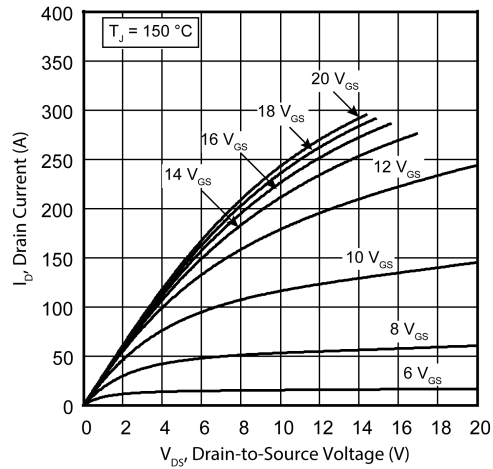
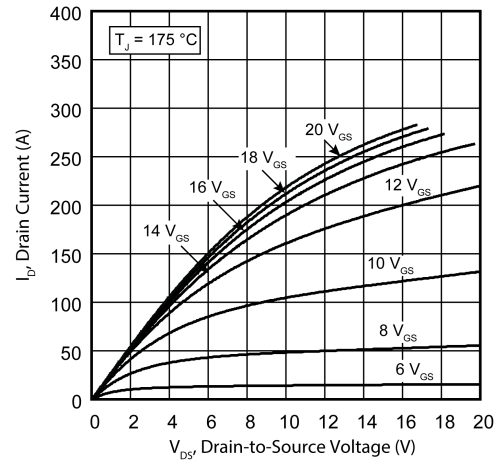
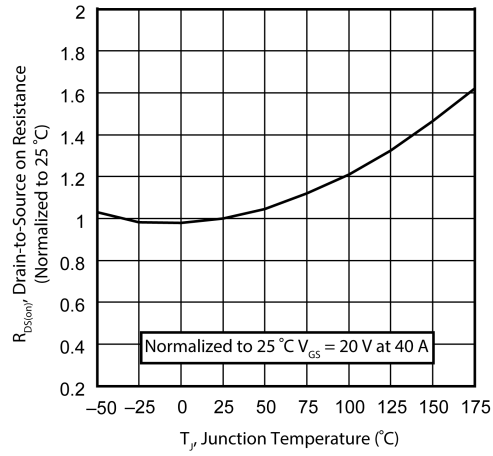
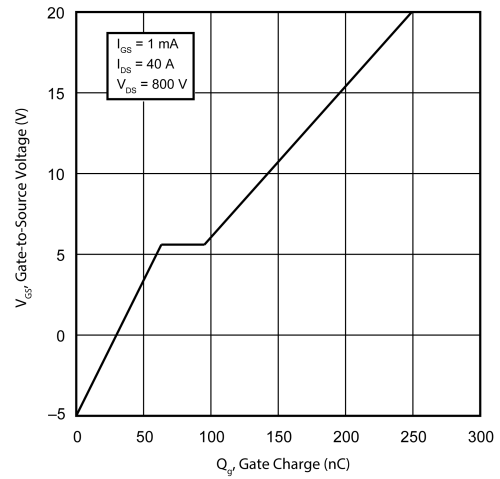
Figure 3 • Drain Current vs.  $V_{DS}$ Figure 4 • Drain Current vs.  $V_{DS}$ Figure 5 •  $R_{DS(on)}$  vs. Junction Temperature

Figure 6 • Gate Charge Characteristics

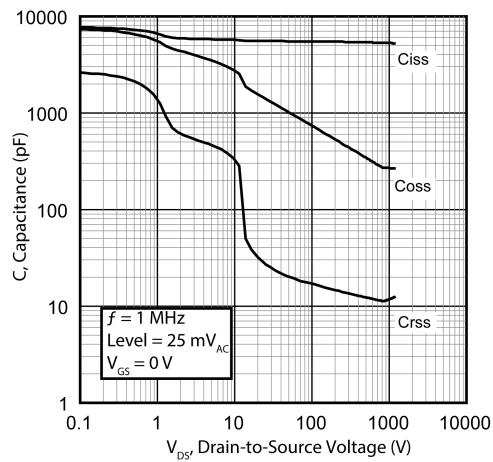
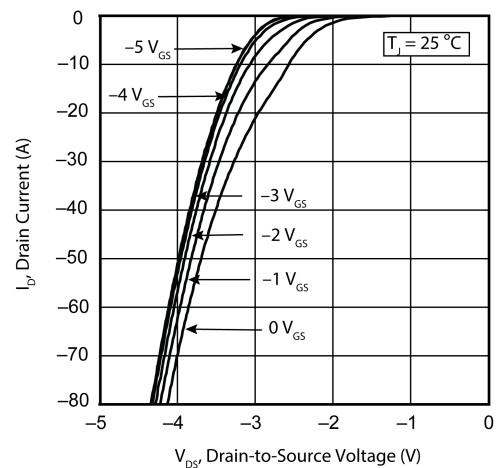


Figure 7 • Capacitance vs. Drain-to-Source Voltage

Figure 8 •  $I_D$  vs.  $V_{DS}$  3<sup>rd</sup> Quadrant Conduction

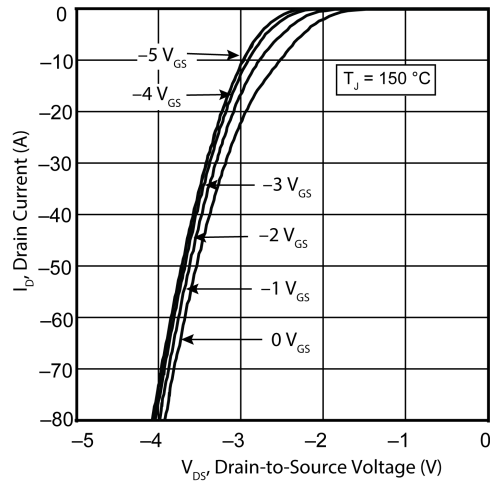
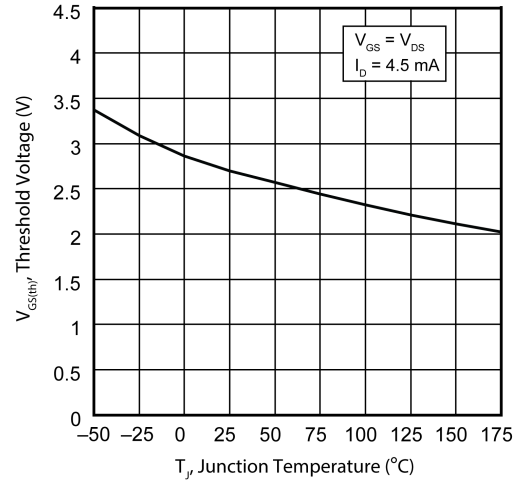
Figure 9 •  $I_D$  vs.  $V_{DS}$  3<sup>rd</sup> Quadrant Conduction

Figure 10 • Threshold Voltage vs. Junction Temp.

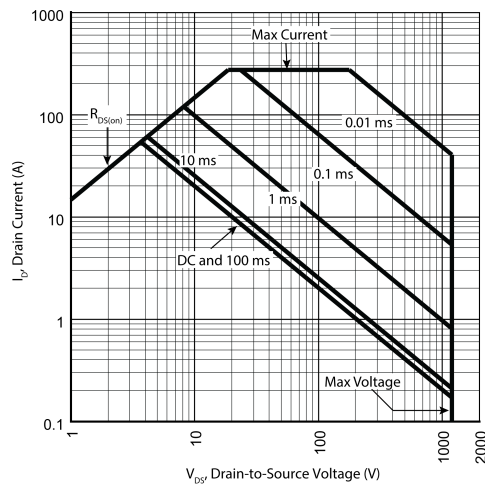


Figure 11 • Forward Safe Operating Area

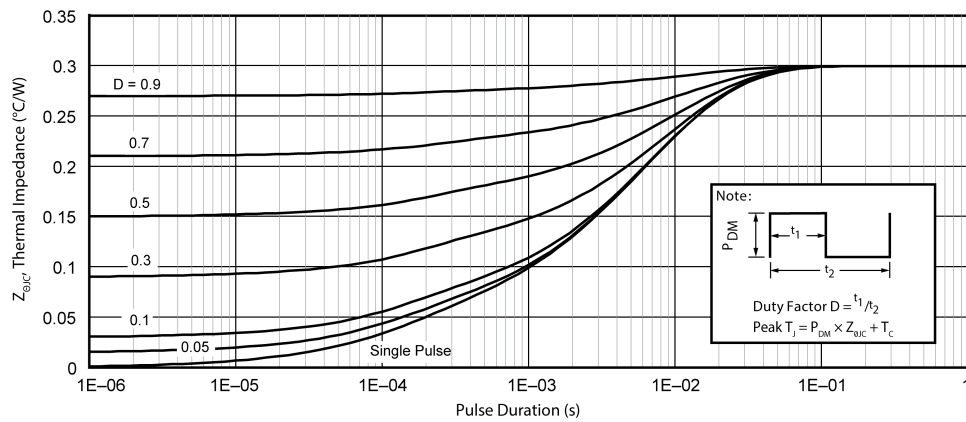


Figure 12 • Maximum Transient Thermal Impedance

## Package Specification

This section shows the package specification of the MSC017SMA120J device.

### Package Outline Drawing

The following figure illustrates the SOT-227 package outline of the MSC017SMA120J device. The dimensions in the figure below are in millimeters and (inches).

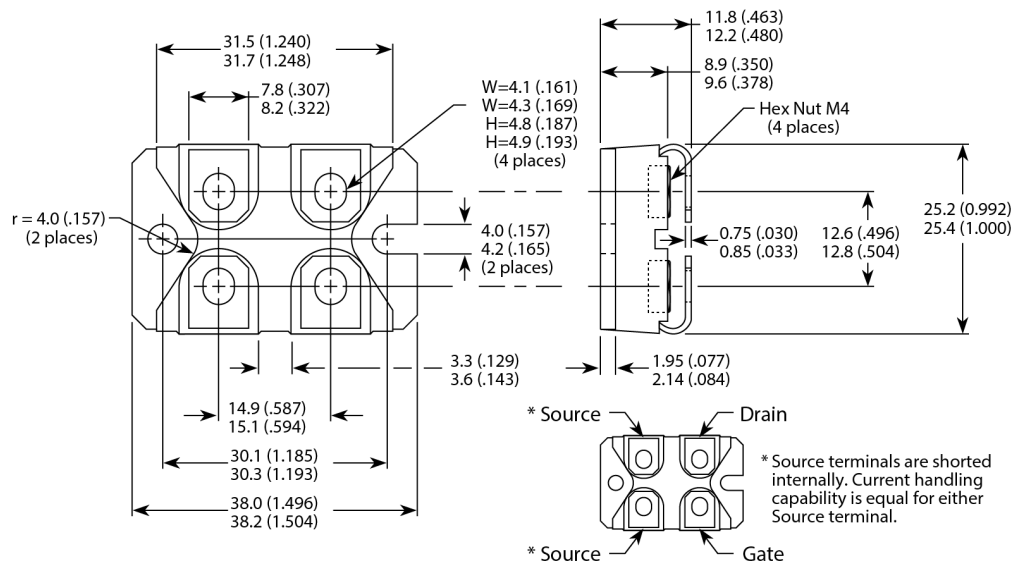


Figure 13 • Package Outline Drawing



**Microsemi**

2355 W. Chandler Blvd.  
 Chandler, AZ 85224 USA

Within the USA: +1 (480) 792-7200  
 Fax: +1 (480) 792-7277

www.microsemi.com © 2020 Microsemi and its corporate affiliates. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation and its corporate affiliates. All other trademarks and service marks are the property of their respective owners.

Microsemi's product warranty is set forth in Microsemi's Sales Order Terms and Conditions. Information contained in this publication is provided for the sole purpose of designing with and using Microsemi products. Information regarding device applications and the like is provided only for your convenience and may be superseded by updates. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is your responsibility to ensure that your application meets with your specifications. THIS INFORMATION IS PROVIDED "AS IS." MICROSEMI MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL MICROSEMI BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL LOSS, DAMAGE, COST OR EXPENSE WHATSOEVER RELATED TO THIS INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROSEMI HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROSEMI'S TOTAL LIABILITY ON ALL CLAIMS IN RELATED TO THIS INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, YOU PAID DIRECTLY TO MICROSEMI FOR THIS INFORMATION. Use of Microsemi devices in life support, mission-critical equipment or applications, and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend and indemnify Microsemi from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microsemi intellectual property rights unless otherwise stated.

Microsemi Corporation, a subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), and its corporate affiliates are leading providers of smart, connected and secure embedded control solutions. Their easy-to-use development tools and comprehensive product portfolio enable customers to create optimal designs which reduce risk while lowering total system cost and time to market. These solutions serve more than 120,000 customers across the industrial, automotive, consumer, aerospace and defense, communications and computing markets. Headquartered in Chandler, Arizona, the company offers outstanding technical support along with dependable delivery and quality. Learn more at [www.microsemi.com](http://www.microsemi.com).

050-7779 | October 2020 | Preliminary

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[MSC017SMA120J](#)