

MSCMC120AM03CT6LIAG

Datasheet

**Very Low Stray Inductance Phase Leg SiC MOSFET Power
Module**

Final

May 2018



Contents

| | | |
|----------|--|-----------|
| 1 | Revision History | 1 |
| 1.1 | Revision A | 1 |
| 2 | Product Overview | 2 |
| 2.1 | Features | 2 |
| 2.2 | Benefits | 2 |
| 2.3 | Applications | 2 |
| 3 | Electrical Specifications | 3 |
| 3.1 | Absolute Maximum Ratings | 3 |
| 3.2 | Electrical Performance | 4 |
| 3.3 | Typical Performance Curves | 7 |
| 4 | Package Specification | 11 |
| 4.1 | Package Outline Drawing | 11 |


1 Revision History

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the most current publication.

1.1 Revision A

Revision A was published in May 2018. It is the first publication of this document.

2 Product Overview

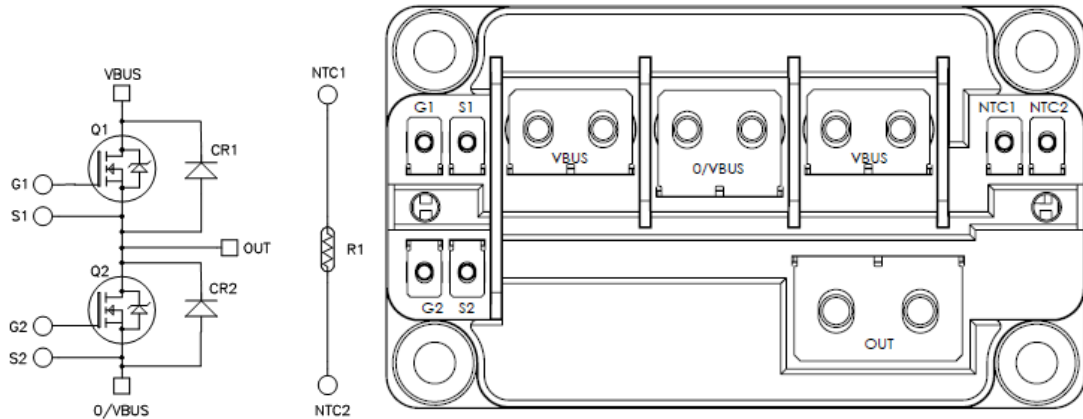

2.1 Features

The following are key features of the MSCMC120AM03CT6LIAG device:

- Very low stray inductance
- Internal thermistor for temperature monitoring
- M4 and M5 power connectors
- M2.5 signals connectors
- AlN substrate for improved thermal performance

SiC Power MOSFET

- Low $R_{DS(on)}$
- High temperature performance

SiC Schottky Diode

- Zero reverse recovery
- Zero forward recovery
- Temperature independent switching behavior
- Positive temperature coefficient on VF

2.2 Benefits

The following are benefits of the MSCMC120AM03CT6LIAG device:

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Low profile
- RoHS compliant

2.3 Applications

The MSCMC120AM03CT6LIAG device is designed for the following applications:

- Motor control

*All ratings taken at $T_j = 25\text{ }^\circ\text{C}$ unless otherwise specified.

*Caution: the devices are sensitive to electrostatic discharge (ESD). Proper handling procedures should be followed.

3 Electrical Specifications

This section details the electrical specifications for the MSCMC120AM03CT6LIAG device.

3.1 Absolute Maximum Ratings

The following table shows the absolute maximum ratings for the MSCMC120AM03CT6LIAG device (per SiC MOSFET).

Table 1 • Absolute Maximum Ratings

| Symbol | Parameter | | Ratings | Unit |
|--------------|--|----------------------------------|----------|------------|
| V_{DS} | Drain- source voltage | | 1200 | V |
| I_D | Continuous drain current | $T_C = 25\text{ }^\circ\text{C}$ | 631 | A |
| | | $T_C = 80\text{ }^\circ\text{C}$ | 475 | |
| I_{DM} | Pulsed drain current | | 1200 | |
| V_{GS} | Gate- source voltage | | -5 to 23 | V |
| V_{GSOP} | Gate- source voltage; recommended operation values | | -5 to 18 | |
| $R_{DS(on)}$ | Drain- source ON resistance | | 3.4 | m Ω |
| P_D | Power dissipation | $T_C = 25\text{ }^\circ\text{C}$ | 2778 | W |

3.2 Electrical Performance

The following tables show the SiC MOSFET characteristics (per SiC MOSFET) of the MSCMC120AM03CT6LIAG device.

Table 2 • Electrical Characteristics

| Symbol | Characteristic | Test Conditions | Min | Typ | Max | Unit |
|--------------|---------------------------------|--|-----------------------------------|-----|------|------------------|
| I_{DSS} | Zero gate voltage drain current | $V_{GS} = 0\text{ V}$, $V_{DS} = 1200\text{ V}$ | | 200 | 1000 | μA |
| $R_{DS(on)}$ | Drain- source on resistance | $V_{GS} = 20\text{ V}$; $I_D = 500\text{ A}$ | $T_j = 25\text{ }^\circ\text{C}$ | 2.5 | 3.4 | $\text{m}\Omega$ |
| | | $V_{GS} = 18\text{ V}$; $I_D = 500\text{ A}$ | $T_j = 175\text{ }^\circ\text{C}$ | 5.2 | | |
| $V_{GS(th)}$ | Gate threshold voltage | $V_{GS} = V_{DS}$, $I_D = 150\text{ mA}$ | 2 | 2.6 | 4 | V |
| I_{GSS} | Gate- source leakage current | $V_{GS} = 20\text{ V}$, $V_{DS} = 0\text{ V}$ | | | 6 | μA |

Table 3 • Dynamic Characteristics

| Symbol | Characteristic | Test conditions | Min | Typ | Max | Unit |
|--------------|-------------------------------------|---|-----------------------------------|------|-------|---------------------------|
| C_{iss} | Input capacitance | $V_{GS} = 0\text{ V}$ | | 27.9 | | nF |
| C_{oss} | Output capacitance | $V_{DS} = 1000\text{ V}$ | | 2.2 | | |
| C_{rss} | Reverse transfer capacitance | $f = 1\text{ MHz}$ | | 0.15 | | |
| Q_g | Total gate charge | $V_{GS} = -5\text{ to }20\text{ V}$ | | 1610 | | nC |
| Q_{gs} | Gate – source charge | $V_{BUS} = 800\text{ V}$ | | 460 | | |
| Q_{gd} | Gate – drain charge | $I_D = 500\text{ A}$ | | 500 | | |
| $T_{d(on)}$ | Turn-on delay time | $V_{GS} = -5\text{ to }20\text{ V}$ | | 21 | | ns |
| T_r | Rise time | $V_{BUS} = 600\text{ V}$ | | 19 | | |
| $T_{d(off)}$ | Turn-off delay time | $I_D = 500\text{ A}$ | | 50 | | |
| T_f | Fall time | $R_L = 1.2\ \Omega$; $R_G = 0.3\ \Omega$ | | 30 | | |
| E_{on} | Turn on energy | Inductive Switching | | 7.4 | | |
| E_{off} | Turn off energy | $V_{GS} = -5\text{ to }20\text{ V}$ | $T_j = 150\text{ }^\circ\text{C}$ | 4.8 | | mJ |
| | | $V_{BUS} = 600\text{ V}$ | $T_j = 150\text{ }^\circ\text{C}$ | | | |
| | | $I_D = 500\text{ A}$ $R_G = 0.3\ \Omega$ | | | | |
| R_{Gint} | Internal gate resistance | | | 0.71 | | Ω |
| R_{thjc} | Junction-to-case thermal resistance | | | | 0.054 | $^\circ\text{C}/\text{W}$ |

Table 4 • Body Diode Ratings and Characteristics

| Symbol | Characteristic | Test conditions | Min | Typ | Max | Unit |
|----------|--------------------------|---|-----------------------------------|-----|-----|---------------|
| V_{SD} | Diode forward voltage | $V_{GS} = -5\text{ V}$ | $T_j = 25\text{ }^\circ\text{C}$ | 4 | | V |
| | | $I_{SD} = 250\text{ A}$ | $T_j = 175\text{ }^\circ\text{C}$ | 3.5 | | |
| t_{rr} | Reverse recovery time | $I_{SD} = 500\text{ A}$; $V_{GS} = -5\text{ V}$ | | 45 | | ns |
| Q_{rr} | Reverse recovery charge | $V_R = 800\text{ V}$; $di_r/dt = 10000\text{ A}/\mu\text{s}$ | | 4 | | μC |
| I_{rr} | Reverse recovery current | | | 135 | | A |

The following table shows the SiC diode characteristics (per SiC diode) of the MSCMC120AM03CT6LIAG device.

Table 5 • SiC Diode Characteristics

| Symbol | Characteristics | Test conditions | Min | Typ | Max | Unit |
|------------|-------------------------------------|--|--|------|-------|------|
| V_{RRM} | Peak repetitive reverse voltage | | | | 1200 | V |
| I_{RM} | Reverse leakage current | $V_R = 1200\text{ V}$ | $T_J = 25\text{ °C}$ | 0.5 | 2.5 | mA |
| | | | $T_J = 175\text{ °C}$ | 1.5 | 5 | |
| I_F | DC forward current | | | 250 | | A |
| V_F | Diode forward voltage | $I_F = 250\text{ A}$ | $T_J = 25\text{ °C}$ | 1.6 | 1.8 | V |
| | | | $T_J = 175\text{ °C}$ | 2.25 | 2.7 | |
| Q_C | Total capacitive charge | $V_R = 800\text{ V}$ | | 1230 | | nC |
| C | Total capacitance | $f = 1\text{ MHz}, V_R = 400\text{ V}$ | | 1150 | | pF |
| | | | $f = 1\text{ MHz}, V_R = 800\text{ V}$ | 865 | | |
| R_{thJC} | Junction-to-case thermal resistance | | | | 0.106 | °C/W |

The following tables show the thermal and package characteristics of the MSCMC120AM03CT6LIAG device.

Table 6 • Package Characteristics

| Symbol | Characteristic | Min | Max | Unit | | |
|------------|--|---------------|----------------|------|-----|----|
| V_{ISOL} | RMS isolation voltage, any terminal to case $t = 1\text{ min}$, 50 to 60 Hz | 4000 | | V | | |
| T_J | Operating junction temperature range | -40 | 175 | °C | | |
| T_{JOP} | Recommended junction temperature under switching conditions | -40 | $T_{max} - 25$ | | | |
| T_{STG} | Storage temperature range | -40 | 125 | | | |
| T_C | Operating case temperature | -40 | 125 | | | |
| Torque | Mounting torque | For terminals | M2.5 | 0.4 | 0.6 | Nm |
| | | | M4 | 2 | 3 | |
| | | | M5 | 2 | 3.5 | |
| | | To heatsink | M6 | 3 | 5 | |
| L_{DC} | Module stray inductance between VBUS and 0/VBUS | | 3 | nH | | |
| Wt | Package weight | | 320 | g | | |

Table 7 • Temperature Sensor NTC

| Symbol | Characteristic | Min | Typ | Max | Unit |
|------------------------|----------------------------|-----|------|-----|------|
| R_{25} | Resistance at 25 °C | | 50 | | kΩ |
| $\Delta R_{25}/R_{25}$ | | | 5 | | % |
| $B_{25/85}$ | $T_{25} = 298.15\text{ K}$ | | 3952 | | K |
| $\Delta B/B$ | $T_C = 100\text{ °C}$ | | 4 | | % |

Figure 1 • NTC Formula

$$R_T = \frac{R_{25}}{\exp\left[B_{25/85}\left(\frac{1}{T_{25}} - \frac{1}{T}\right)\right]}$$

T: Thermistor temperature R_T: Thermistor value at T

Note: See the [APT0406 application note](http://www.microsemi.com) at www.microsemi.com.

3.3 Typical Performance Curves

This section shows the typical performance curves for the MSCMC120AM03CT6LIAG device.

The following section details the typical performance curves for SiC MOSFET.

Figure 2 • Maximum Thermal Impedance

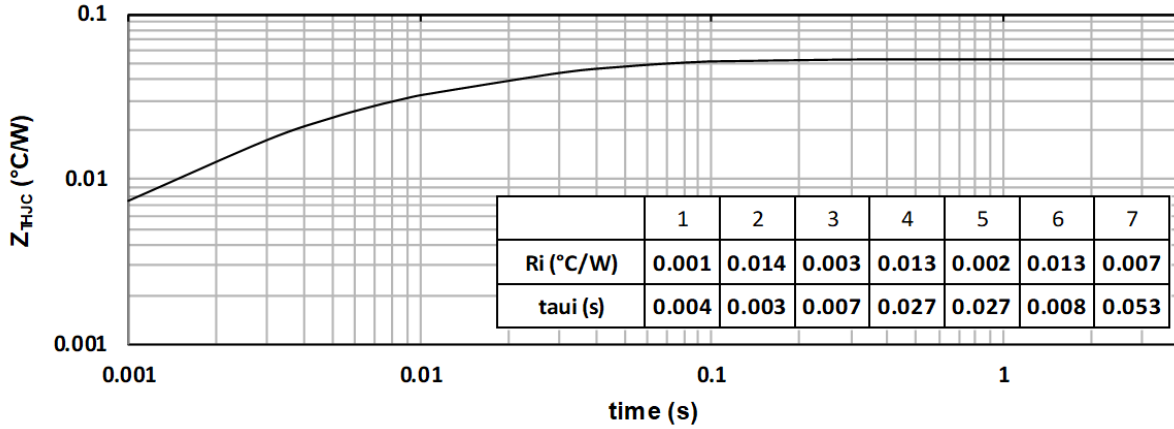


Figure 3 • Output Characteristics

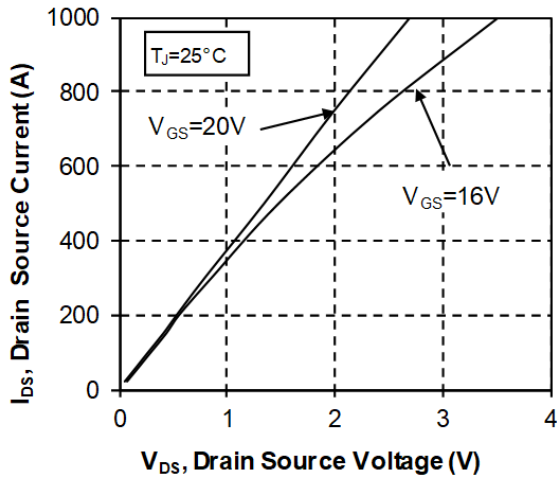


Figure 4 • Output Characteristics II

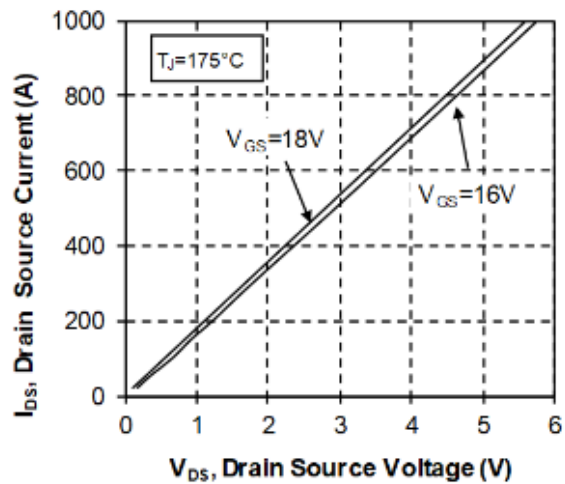


Figure 5 • Normalized RDS(on) vs. Temperature

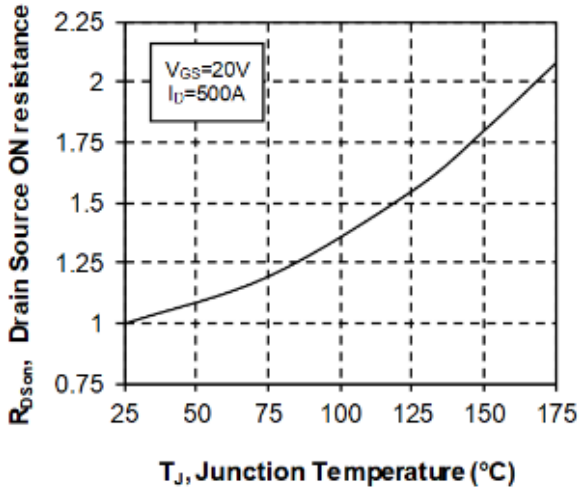


Figure 6 • Transfer Characteristics

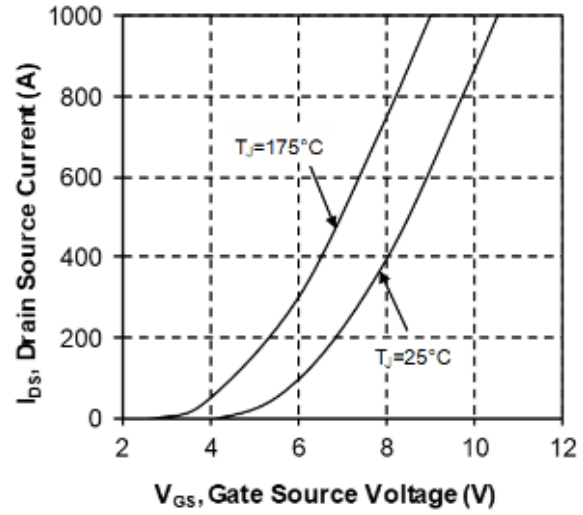


Figure 7 • Switching Energy vs. Rg

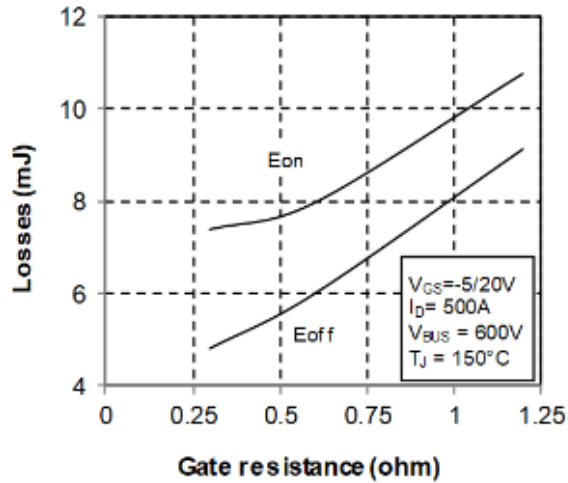


Figure 8 • Switching Energy vs. Current

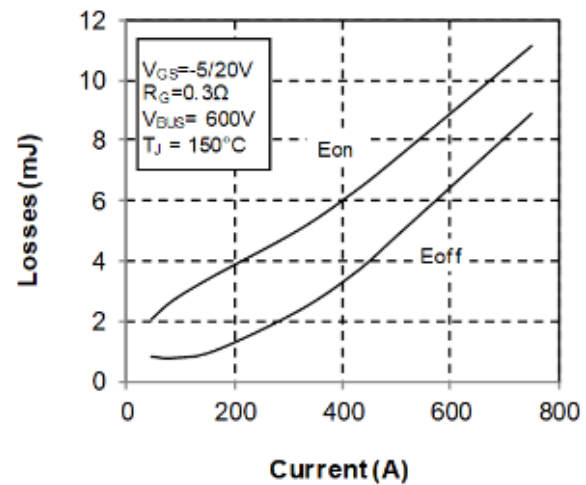


Figure 9 • Capacitance vs. Drain Source Voltage

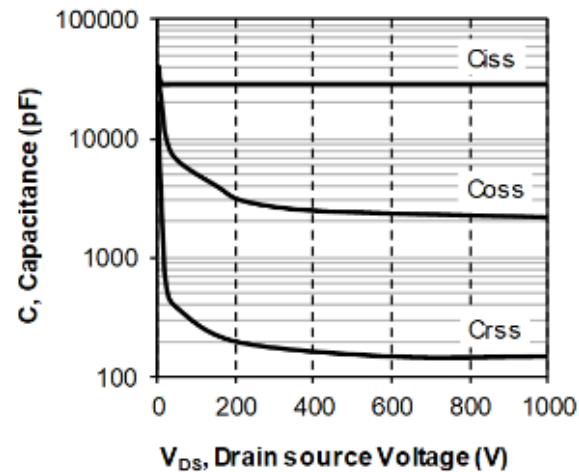


Figure 10 • Gate Charge vs. Gate Source Voltage

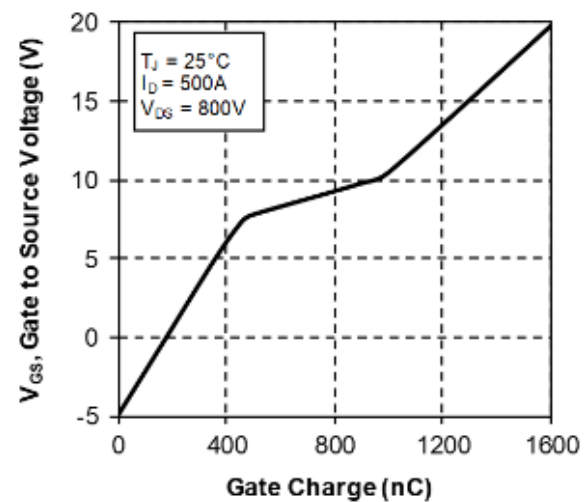


Figure 11 • Body Diode Characteristics

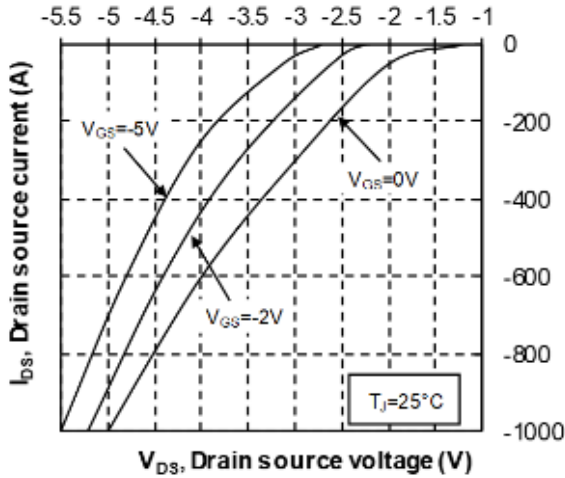


Figure 12 • 3rd Quadrant Characteristics

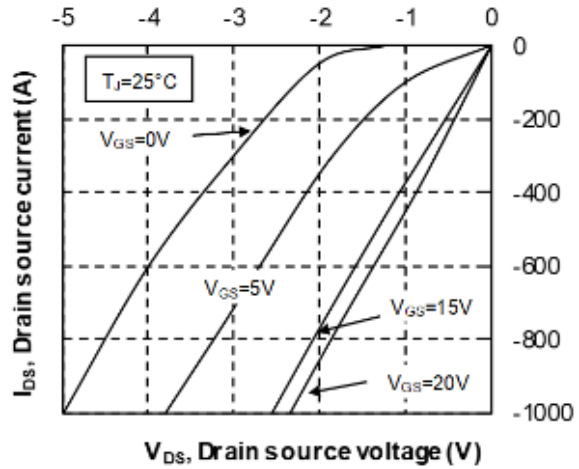


Figure 13 • Body Diode Characteristics II

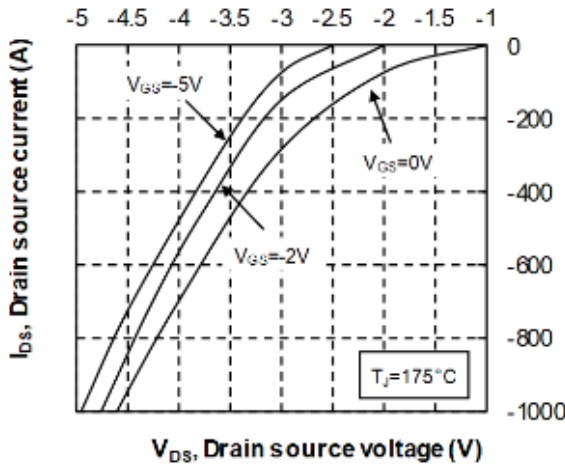


Figure 14 • 3rd Quadrant Characteristics


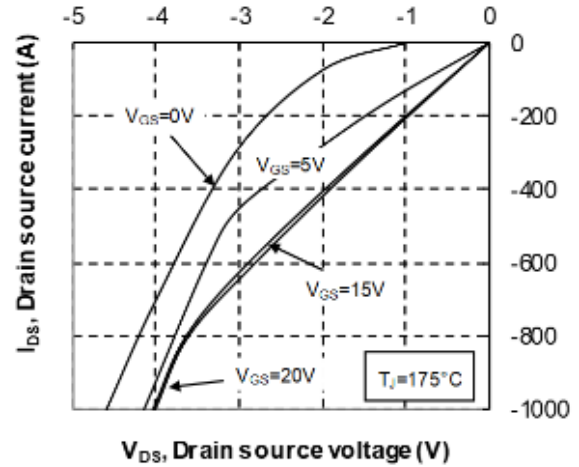


Figure 15 • Operating Frequency vs. Drain Current

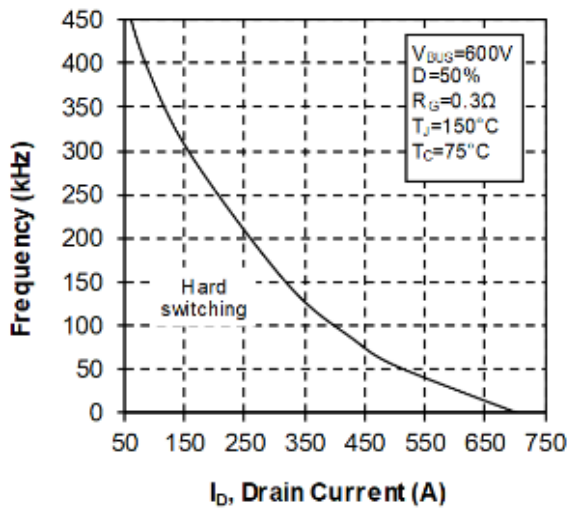

The following section details the typical performance curves for SiC Diode.

Figure 16 • SiC Diode Maximum Thermal Impedance

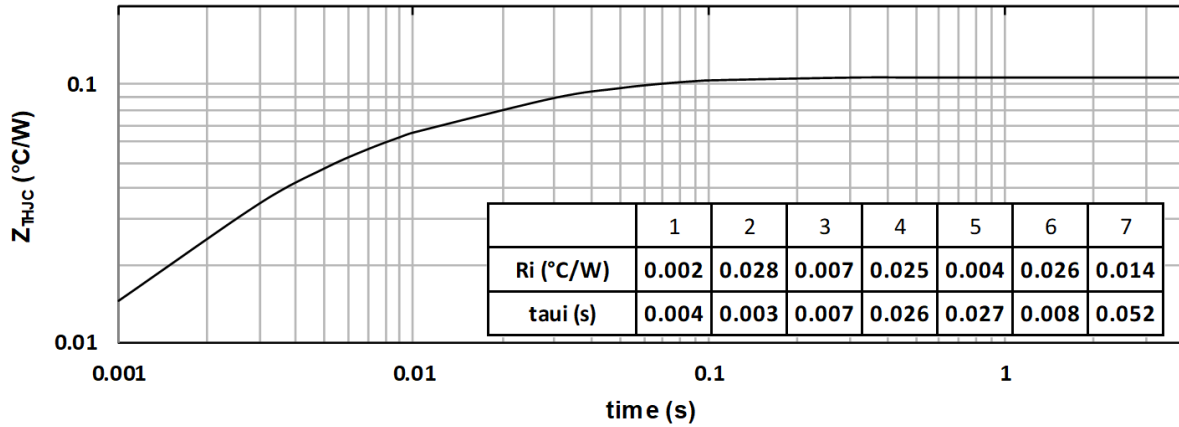


Figure 17 • Forward Characteristics

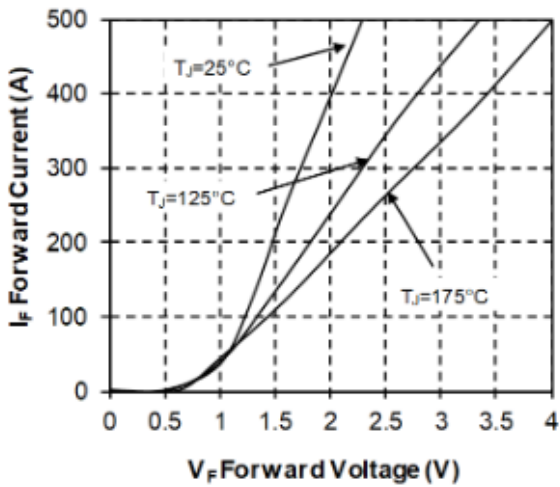


Figure 18 • Reverse Characteristics


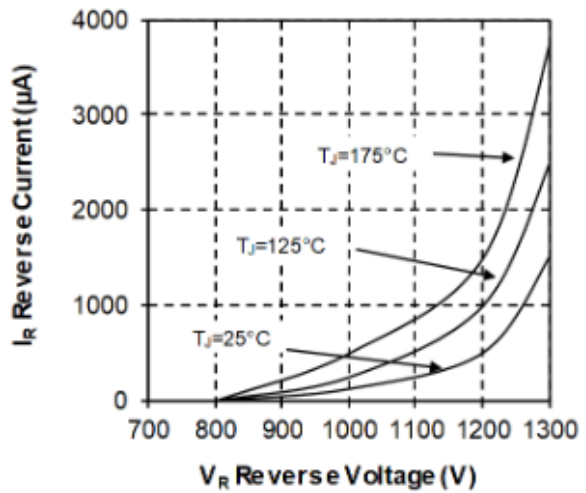


Figure 19 • Capacitance vs. Reverse Voltage

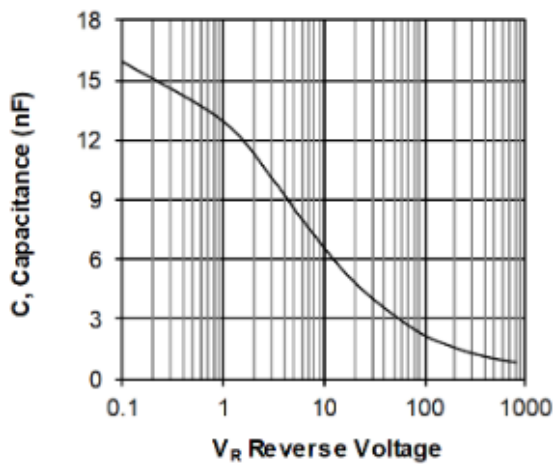


4 Package Specification

This section shows the package specification for the MSCMC120AM03CT6LIAG device.

4.1 Package Outline Drawing

This section details the package drawing of the MSCMC120AM03CT6LIAG device. Dimensions are in millimeters.

Figure 20 • Package Outline Drawing

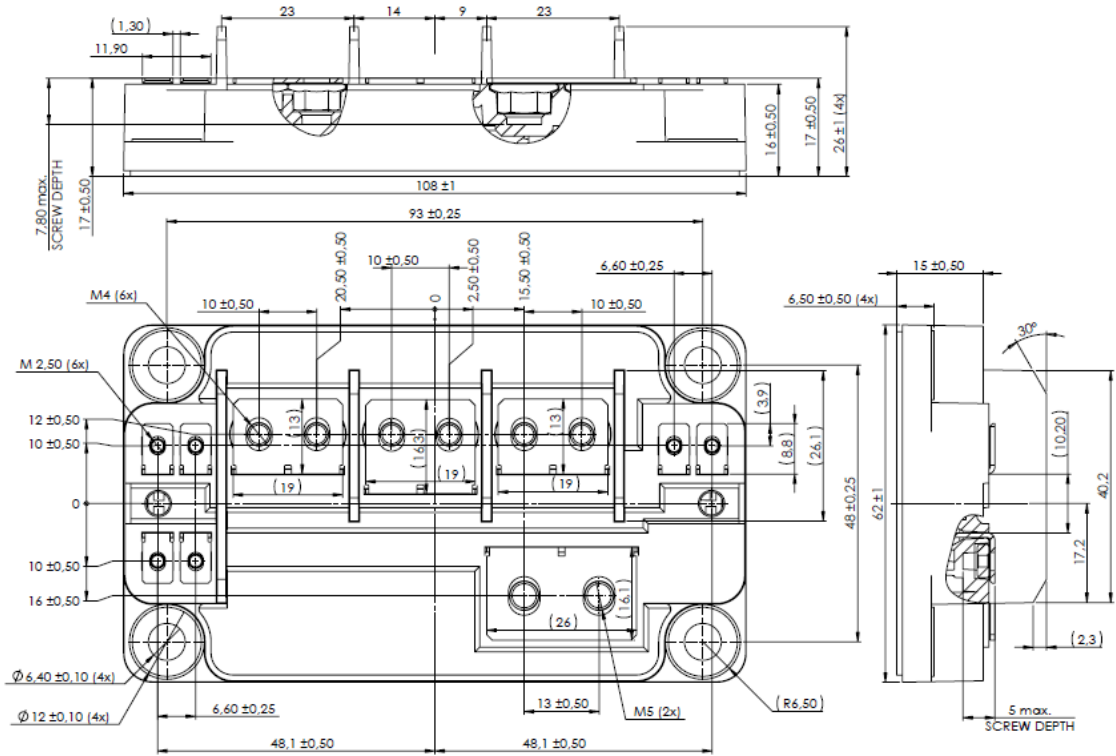

Note: See the AN1911 application note at www.microsemi.com.

**Microsemi Corporate Headquarters**

One Enterprise, Aliso Viejo,
 CA 92656 USA
 Within the USA: +1 (800) 713-4113
 Outside the USA: +1 (949) 380-6100
 Fax: +1 (949) 215-4996
 Email: sales.support@microsemi.com
www.microsemi.com

© 2018 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees globally. Learn more at www.microsemi.com.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[MSCMC120AM03CT6LIAG](#)