

Helping Customers Innovate, Improve & Grow



VT-702

Description

Vectron's VT-702 Temperature Compensated Crystal Oscillator (TCXO) is a quartz stabilized, clipped sine wave or CMOS output, analog temperature compensated oscillator, operating off either 5.0 or 3.3 volt supply, hermetically sealed 10 pad 7.0 x 5.0 mm ceramic package.


Features

- 5.000 - 52.000MHz Output Frequency
- ± 0.280 ppm Temperature Stability
- Optional Frequency Tuning
- Fundamental Crystal Design
- Stratum 3 version available as a custom part number
- Hermetically Sealed Ceramic SMD package
- Product is compliant to RoHS directive  and fully compatible with lead free assembly

Applications

- Femto Cells
- Base Stations
- IP Networking
- Global Positioning Systems
- Point to Point Radio
- Test and Measurement

Block Diagram

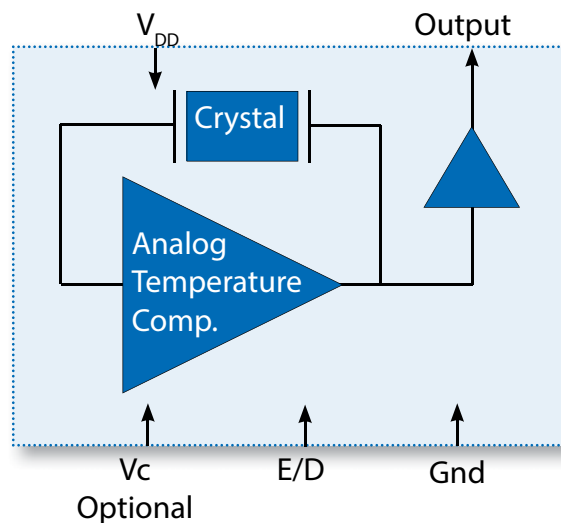

Specifications

Table 1. Electrical Performance, Clipped Sine Wave Option

Parameter	Symbol	Min	Typ	Max	Units
Output Frequency ¹ , <i>Ordering Option</i>	f _o	5		52	MHz
Supply Voltage ² , <i>Ordering Option</i>	V _{DD}	+2.8, +3.0, +3.3, +5.0			V
Supply Current	I _{DD}			3.5	mA
Operating Temperature, <i>Ordering Option</i>	T _{OP}	0/55, -10/70, -20/70, -30/85, -40/85			°C
Frequency Stability					
Stability Over T _{OP} ⁴ <i>Ordering Option</i>	F _{STAB}	±0.05, ±0.10, ±0.20, ±0.28, ±0.50			ppm
Frequency Tolerance ⁵	F _{TOL}			±2.0	ppm
Power Supply Stability, ±5% change	F _{SUP}			±0.2	ppm
Load Stability, ±10% change	F _{LOAD}			±0.2	ppm
Aging / 1st year	F _{AGE}			±1.0	ppm
Frequency Tuning (EFC), <i>Ordering Option</i>					
Tuning Range ⁶	PR	±5.0, ±8.0, ±10.0, ±12.0			ppm
Tuning Slope		Positive			
Control Voltage to reach Pull Range	Vc	0.5	1.5	2.5	V
Control Voltage Impedance		100			Kohm
RF Output (Clipped Sine Wave) <i>Ordering Option</i>					
Output Level	V _o p-p	0.8			V
Output Load	C _L		10K 10pF		
Start Up Time	t _{SU}			2	ms
Output Enable ⁷	V _{IH}	0.7*V _{DD}		0.3*V _{DD}	V
Output Disable	V _{IL}				V
Phase Noise ⁸					
Phase Noise ⁸ , 10MHz					dBc/Hz
10Hz			-99		
100Hz			-123		
1kHz			-143		
10kHz			-152		
100kHz			-155		

1. Refer to Table 8 for Standard Frequencies. Other Frequencies may be available upon request. Check with factory
2. Output DC-cut capacitor is optional.
3. The VT-702 power supply pin should be filtered, eg, a 0.1 and 0.01uf capacitor
4. Referenced to the midpoint between minimum and maximum frequency value over the operating temperature range.
5. Frequency measured at 25 °C, 1 hour after 2 IR reflows.
6. Referenced to Mid Control Voltage
7. Output is Enabled if Enable / Disable pad is left Open or No Connect.
8. Measured using Agilent E5052 Signal Source Analyzer at 25 °C

Table 2. Electrical Performance, CMOS Option					
Parameter	Symbol	Min	Typ	Max	Units
Output Frequency ¹ , <i>Ordering Option</i>	f _O	5		52	MHz
Supply Voltage ² , <i>Ordering Option</i>	V _{DD}	+2.8, +3.0, +3.3, +5.0			V
Supply Current	I _{DD}			6.0	mA
Operating Temperature, <i>Ordering Option</i>	T _{OP}	0/55, -10/70, -20/70, -30/85, -40/85			°C
Frequency Stability					
Stability Over T _{OP} ⁴ <i>Ordering Option</i>	F _{STAB}	±0.05, ±0.10, ±0.20, ±0.28, ±0.50			ppm
Frequency Tolerance ⁵	F _{TOL}			±2.0	ppm
Power Supply Stability, ±5% change	F _{SUP}			±0.2	ppm
Load Stability, ±10% change	F _{LOAD}			±0.2	ppm
Aging / 1st year	F _{AGE}			±1.0	ppm
Frequency Tuning (EFC), <i>Ordering Option</i>					
Tuning Range ⁶	PR	±5.0, ±8.0, ±10.0, ±12.0			ppm
Tuning Slope		Positive			
Control Voltage to reach Pull Range	Vc	0.5	1.5	2.5	V
Control Voltage Impedance		100			Kohm
RF Output (CMOS), <i>Ordering Option</i>					
Output Level High	V _{OH}	0.9*V _{DD}			V
Output Level Low	V _{OL}			0.1*V _{DD}	V
Output Load	C _L			15	pF
Duty Cycle		45		55	%
Start Up Time	T _{SUP}			2	ms
Rise / Fall Times	t _R / t _F			4	ns
Output Enable ⁷	V _{IH}	0.7*V _{DD}			V
Output Disable	V _{IL}			0.3*V _{DD}	V
Phase Noise ⁸					
Phase Noise ⁸ , 10MHz					dBc/Hz
10Hz			-101		
100Hz			-124		
1kHz			-144		
10kHz			-154		
100kHz			-156		

1. Refer to Table 8 for Standard Frequencies. Other Frequencies may be available upon request. Check with factory

2. Output DC-cut capacitor is optional.

3. The VT-702 power supply pin should be filtered, eg, a 0.1 and 0.01uf capacitor

4. Referenced to the midpoint between minimum and maximum frequency value over the operating temperature range.


5. Frequency measured at 25 °C, 1 hour after 2 IR reflows.

6. Referenced to Mid Control Voltage


7. Output is Enabled if Enable / Disable pad is left Open or No Connect.

8. Measured using Agilent E5052 Signal Source Analyzer at 25 °C

Phase Noise, CMOS

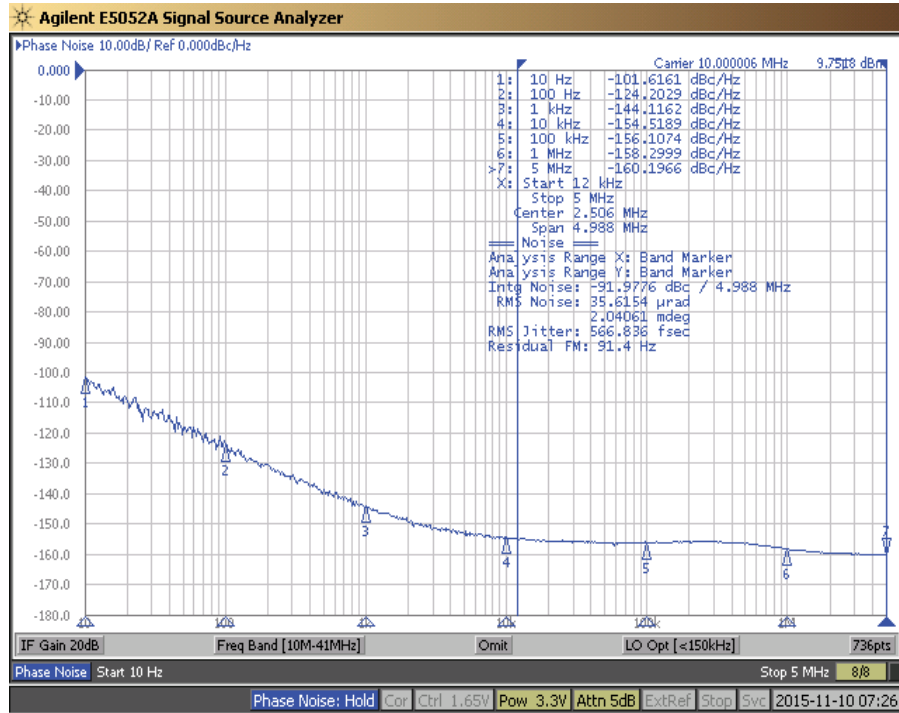

Package Drawing

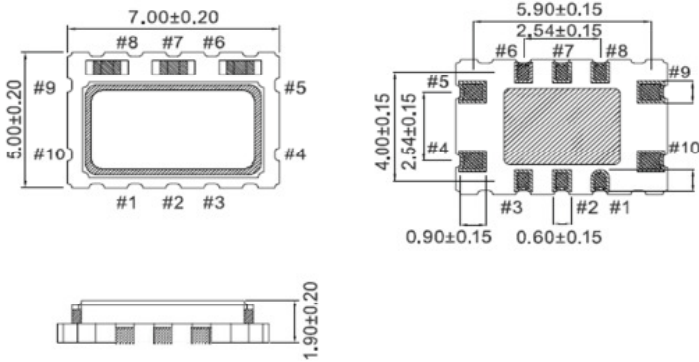

Dimensions in mm

Marking Information


XXMXXX - Frequency (10M000)

YY - Year of Manufacture

WW - Week of the Year

T - Manufacturing Location

● - Pin 1 Indicator



Recommended Land Pattern

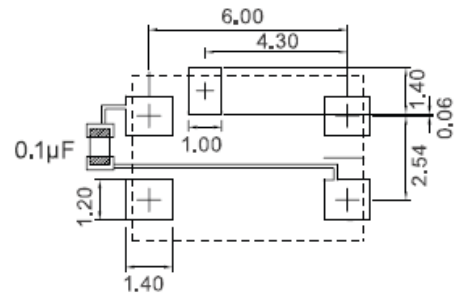


Table 3. Pinout

Pin #	Symbol	Function
1	NC	No Connect
2	NC	No Connect
3	NC	No Connect
4	GND	Ground
5	OUT	RF Output
6	NC	No Connects
7	NC	No Connect
8	E/D	Enable / Disable
9	V _{DD}	Supply Voltage
10	NC	No Connect

Enable/Disable Function

Enable/Disable Feature: The VT-702 has an enable/disable feature to which shuts down the oscillator and puts the output in to a high impedance mode. If the Enable/Disable is left open or floating, the output is active.

Clipped Sine Wave Output



Maximum Ratings

Absolute Maximum Ratings and Handling Precautions

Stresses in excess of the absolute maximum ratings can permanently damage the device. Functional operation is not implied or any other excess of conditions represented in the operational sections of this data sheet. Exposure to absolute maximum ratings for extended periods may adversely affect device reliability.

Although ESD protection circuitry has been designed into the VT-702, proper precautions should be taken when handling and mounting, Vectron employs a Human Body Model and Charged Device Model for ESD susceptibility testing and design evaluation. ESD thresholds are dependent on the circuit parameters used to define the model. Although no industry standard has been adopted for the CDM a standard resistance of 1.5kOhms and capacitance of 100pF is widely used and therefor can be used for comparison purposes.

Table 4. Maximum Ratings			
Parameter	Symbol	Rating	Unit
Storage Temperature	T_{STORE}	-55/125	°C
Supply Voltage	V_{DD}	-0.6/6.0	V
Control Voltage	Vc	-0.6/ V_{DD} +0.6	V
Enable/Disable Voltage	E/D	-0.6/ V_{DD} +0.6	V
ESD, Human Body Model		1500	V
ESD, Charged Device Model		1000	V

Table 5. Environmental Compliance	
Parameter	Condition
Mechanical Shock	MIL-STD-883 Method 2002
Mechanical Vibration	MIL-STD-883 Method 2007
Temperature Cycle	MIL-STD-883 Method 1010
Solderability	MIL-STD-883 Method 2003
Fine and Gross Leak	MIL-STD-883 Method 1014
Resistance to Solvents	MIL-STD-883 Method 2015
Moisture Sensitivity Level	MSL1
Contact Pads	Gold over Nickel


IR Reflow

Suggested IR Profile

Devices are built using lead free epoxy and can be subjected to standard lead free IR reflow conditions shown in Table 5. Contact pads are gold over nickel and lower maximum temperatures can also be used, such as 220C.

Table 6. Reflow Profile		
Parameter	Symbol	Value
PreHeat Time Ts-min Ts-max	t_s	200 sec Max 150°C 200°C
Ramp Up	R_{UP}	3°C/sec Max
Time above 217C	t_L	150 sec Max
Time to Peak Temperature	$t_{25C \text{ to peak}}$	480 sec Max
Time at 260C	t_p	30 sec Max
Time at 240C	t_{p2}	60 sec Max
Ramp down	R_{DN}	6°C/sec Max




Solderprofile:

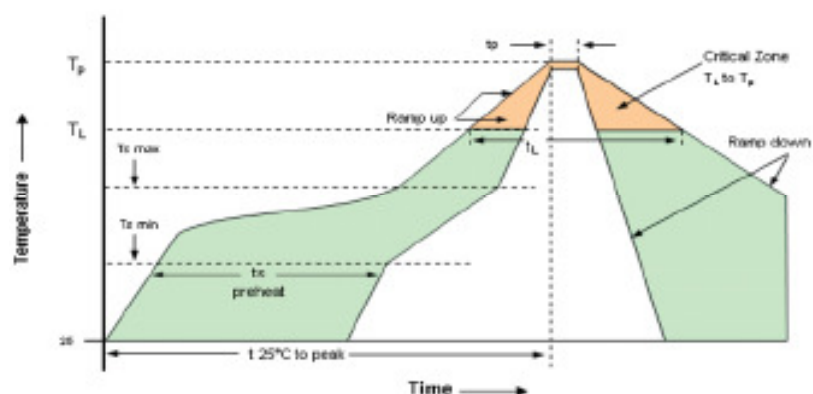

Tape & Reel

Table 7. Tape and Reel Information

Tape Dimensions (mm)					Reel Dimensions (mm)							
W	F	Do	Po	P1	A	B	C	D	N	W1	W2	#/Reel
16	7.5	1.5	4	8	180	1.5	13	20.2	60	16.4	20.4	1000

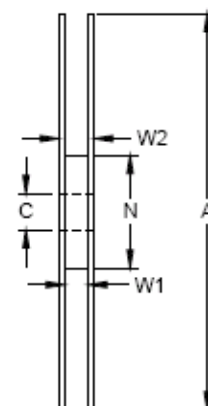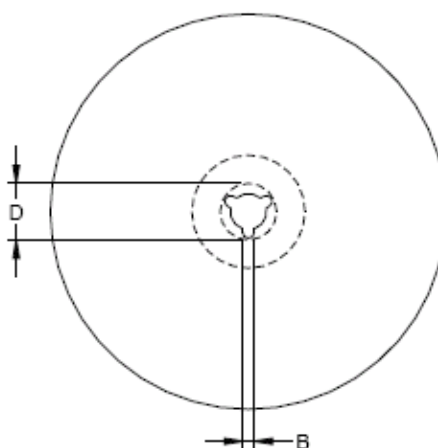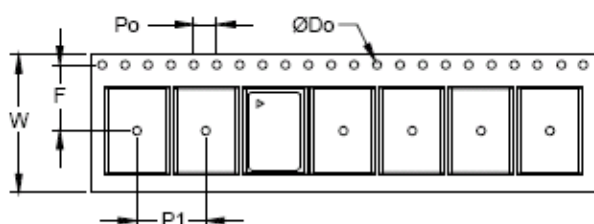

Ordering Information

Table 8. Standard Frequencies (MHz)

10.000	12.800	16.384	19.200	20.000	25.000	26.000	40.000		

VT-702- E F W - 207A - xxMxxxxxxxx

Product
TCXO

Package
5x7 Ceramic

Voltage Options
D: +5.0 Vdc $\pm 5\%$
E: +3.3 Vdc $\pm 5\%$
F: +3.0 Vdc $\pm 5\%$
G: +2.8 Vdc $\pm 5\%$

Output
A: CMOS
F: Clipped Sine Wave

Temp Range
R: 0/55°C
W: -10/70°C
J: -20/70°C
G: -30/80°C
H: -30/85°C
E: -40/85°C

Frequency in MHz

Tuning
0: Fixed, No tuning
A: ± 5 ppm
B: ± 8 ppm
C: ± 10 ppm
D: ± 12 ppm

Stability
508: ± 0.5 ppm
107: ± 0.10 ppm
207: ± 0.20 ppm
287: ± 0.28 ppm
507: ± 0.50 ppm

**Note: not all combination of options are available.
Other specifications may be available upon request.*

Example: VT-702-EFW-207A-26M0000000

*** Add _SNPBDIP for tin lead solder dip**
Example: VT-702-EFW-207A-26M0000000__SNPBDIP

Revision History

Revision Date	Approved	Description
August 10, 2018	FB	Rev 0.4: Updated logo and contact information, added "SNPBDIP" ordering option
October 29, 2018	FB	Correct package drawing and specifications from rev Nov30 2015 version

**Microsemi Headquarters**

One Enterprise, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996
email: sales.support@microsemi.com
www.microsemi.com

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

©2018 Microsemi, a wholly owned subsidiary of Microchip Technology Inc. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[VT-702-DFJ-507A-50M0000000](#) [VT-702-EAE-2870-12M8000000](#) [VT-702-EAE-5070-25M0000000](#) [VT-702-EAH-2070-10M0000000](#) [VT-702-EAJ-1070-40M0000000](#) [VT-702-EFE-287A-40M0000000](#)