


Thermo 30 Click



PID: MIKROE-5736

Thermo 30 Click is a compact add-on board that accurately measures temperature. This board features the STS32-DIS-10KS, a third-generation, high-reliability, certified digital temperature sensor from Sensirion. It is a digitally calibrated and ISO17025-certified temperature sensor with an operating temperature range of -40 to 125°C. The temperature sensor relies on industry-proven CMOSens® technology, which enables better computational power, reliability, and accuracy specifications in comparison to its predecessors. This Click board™ makes the perfect solution for the development of the thermal management of portable electronics and industrial, consumer, and environmental applications.

How does it work?

Thermo 30 Click is based on the STS32-DIS-10KS, a third-generation, high-reliability, certified digital temperature sensor from Sensirion. Every sensor has its unique serial number and is supplied with an ISO17025-accredited calibration certificate, which comprises three temperatures: -30°C, 5°C, and 70°C. The calibration is performed on each sensor and granted by the Swiss Accreditation Service. The calibration data and the serial number are stored in the onboard memory. Temperature data can be acquired both in Single Shot and Periodic Data mode as a 16-bit temperature value. The sensor is also equipped with an internal heater that can be used for plausibility checking only and can be switched on and off through software.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

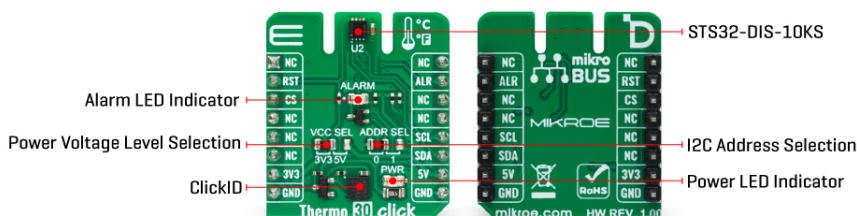

The Thermo 30 Click uses a standard 2-Wire I2C interface to communicate with the host MCU with Fast mode support and frequencies up to 1MHz. The I2C address can be selected via the ADDR SEL jumper (0 set by default). The STS32-DIS-10KS can be reset via the RST pin of the mikroBUS™ socket, through a general call, or software as a soft reset. Resetting over the RST pin or through a general call (according to I2C specifications) achieves a full reset, while with the soft reset, the sensor resets the system controller and reloads calibration data from memory. In addition, the Thermo 30 Click comes with an alert function, a feature that can interrupt the host MCU over the ALR pin of the mikroBUS™ socket if there is an alarm condition. The red ALARM LED stands as a visual presentation of this feature.

This Click board™ can operate with either 3.3V or 5V logic voltage levels selected via the VCC SEL jumper. This way, both 3.3V and 5V capable MCUs can use the communication lines properly. However, the Click board™ comes equipped with a library containing easy-to-use functions and an example code that can be used, as a reference, for further development.

Specifications

Type	Temperature & humidity
Applications	Can be used for the development of the thermal management of portable electronics and industrial, consumer, and environmental applications
On-board modules	STS32-DIS-10KS - a 3rd generation certified digital temperature sensor from Sensirion
Key Features	Low power consumption, high precision, high reliability, long-term stability, 16-bit temperature resolution, low drift digital calibration on CMOSens® technology, high accuracy, unique serial number, and more
Interface	I2C
Feature	ClickID
Compatibility	mikroBUS™
Click board size	S (28.6 x 25.4 mm)
Input Voltage	3.3V or 5V

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.




ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Pinout diagram

This table shows how the pinout on Thermo 30 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	NC	
Reset	RST	2	RST	INT	15	ALR	Alert
ID COMM	CS	3	CS	RX	14	NC	
	NC	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	SCL	I2C Clock
	NC	6	MOSI	SDA	11	SDA	I2C Data
Power Supply	3.3V	7	3.3V	5V	10	5V	Power Supply
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
LD2	ALARM	-	Alarm LED Indicator
JP1	VCC SEL	Left	Power/Logic Level Voltage Selection 3V3/5V: Left position 3V3, Right position 5V
JP2	ADDR SEL	Left	I2C Address Selection 0/1: Left position 0, Right position 1

Thermo 30 Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	3.3	-	5	V
Operating Temperature Range	-40	-	125	°C
Temperature Accuracy	-	±0.4	-	°C
Temperature Resolution	-	0.01	-	°C

Software Support

We provide a library for the Thermo 30 Click as well as a demo application (example), developed using MIKROE [compilers](#). The demo can run on all the main MIKROE [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager(recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Library Description

This library contains API for Thermo 30 Click driver.

Key functions

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

- thermo30_hw_reset Thermo 30 hw reset device function.
- thermo30_start_measurement Thermo 30 start measurement function.
- thermo30_read_temperature Thermo 30 read temperature function.

Example Description

This example demonstrates the use of Thermo 30 Click board™ by reading and displaying the temperature measurements.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Other Mikroe Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.Thermo30

Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MIKROE [compilers](#).

mikroSDK

This Click board™ is supported with [mikroSDK](#) - MIKROE Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click boards™](#)

[ClickID](#)

Downloads

[STS32-DIS datasheet](#)

[Thermo 30 click 2D and 3D files v100](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[Thermo 30 click example on Libstock](#)

[Thermo 30 click schematic v100](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mikroe:](#)

[MIKROE-5736](#)