

INTERCONNECTS

SERIES 416 • .100" GRID ELEVATED • DOUBLE ROW STRIPS

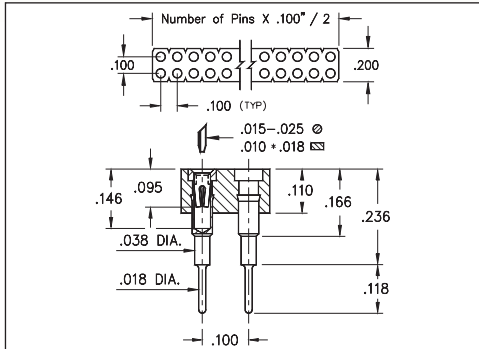


FIG. 1

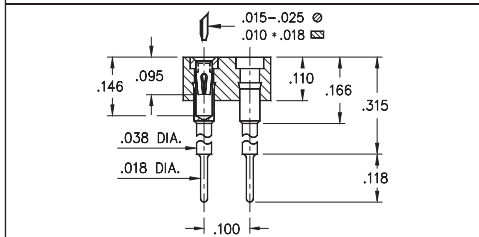


FIG. 2

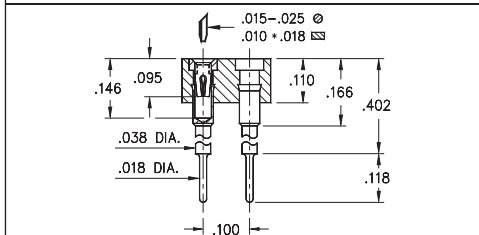


FIG. 3

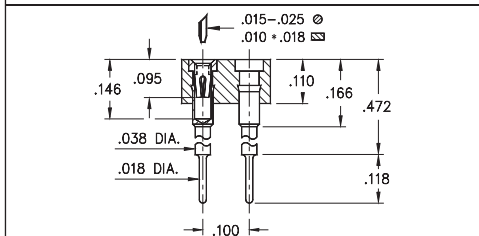


FIG. 4


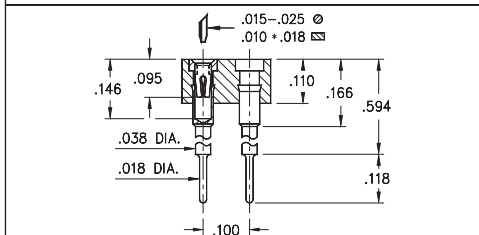


FIG. 5

- Elevated socket strips are available in 5 different heights:

416...006 uses pin # 0153-1
416...003 uses pin # 0153-2
416...007 uses pin # 0153-3
416...008 uses pin # 0153-4
416...001 uses pin # 0153-5
See page 167 for details

- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

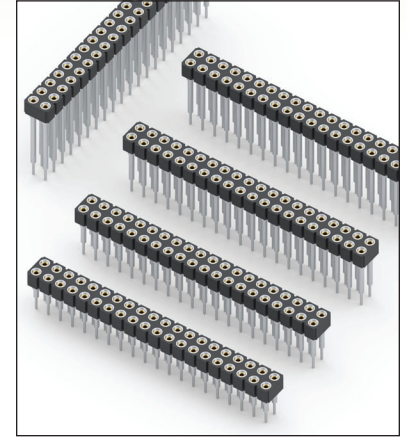

ORDERING INFORMATION

FIG. 1	Series 416...006	Standoff Height = .236		
	416-XX-2	-41-006000		
	Specify number of pins	04-64		
FIG. 2	Series 416...003	Standoff Height = .315		
	416-XX-2	-41-003000		
	Specify number of pins	04-64		
FIG. 3	Series 416...007	Standoff Height = .402		
	416-XX-2	-41-007000		
	Specify number of pins	04-64		
FIG. 4	Series 416...008	Standoff Height = .472		
	416-XX-2	-41-008000		
	Specify number of pins	04-64		
FIG. 5	Series 416...001	Standoff Height = .594		
	416-XX-2	-41-001000		
	Specify number of pins	04-64		
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Enviromental Data, See page 264				
SPECIFY PLATING CODE XX=				
Sleeve (Pin)	91	93	41	43
	200 μ"Sn/Pb	200 μ"Sn/Pb	200 μ"Sn	200 μ"Sn
Contact (Clip)	10 μ"Au	30 μ"Au	10 μ"Au	30 μ"Au

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[416-41-212-41-007000](#) [416-41-216-41-007000](#) [416-41-216-41-008000](#) [416-41-218-41-008000](#) [416-41-222-41-007000](#) [416-41-224-41-007000](#) [416-41-226-41-006000](#) [416-41-202-41-007000](#) [416-41-202-41-008000](#) [416-41-214-41-008000](#) [416-41-226-41-007000](#) [416-41-228-41-007000](#) [416-41-204-41-007000](#) [416-41-208-41-008000](#) [416-41-210-41-008000](#) [416-41-218-41-007000](#) [416-41-220-41-008000](#) [416-41-222-41-008000](#) [416-41-202-41-003000](#) [416-41-210-41-007000](#) [416-41-226-41-008000](#) [416-41-230-41-007000](#) [416-41-242-41-008000](#) [416-41-244-41-007000](#) [416-41-208-41-001000](#) [416-41-224-41-008000](#) [416-41-234-41-007000](#) [416-41-234-41-008000](#) [416-41-246-41-007000](#) [416-41-248-41-008000](#) [416-41-250-41-008000](#) [416-41-232-41-007000](#) [416-41-232-41-008000](#) [416-41-240-41-008000](#) [416-41-236-41-008000](#) [416-41-238-41-008000](#) [416-41-240-41-007000](#) [416-41-242-41-006000](#) [416-41-242-41-007000](#) [416-41-248-41-007000](#)