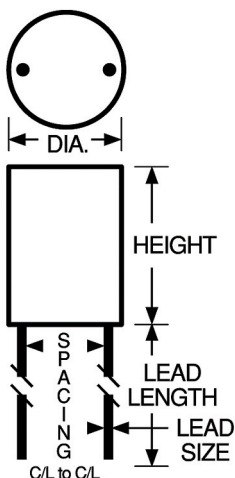


SERIES**2534R
2534****Molded Unshielded RF Coils**

Actual Size (Max.)

Physical Parameters

	Inches	Millimeters
Height	0.345 Max.	8.76 Max.
Diameter	0.25 ± 0.010	6.35 ± 0.25
Lead Size		
AWG #24 TCW	0.020 ± 0.0015	0.508 ± .0038
Lead Length	1.62 ± 0.12	41.15 ± 3.05
Lead Spacing	0.170 to 0.210	4.32 to 5.33

Current Rating at 90°C Ambient 35°C Rise**Operating Temperature Range** -55°C to +125°C**Maximum Power Dissipation at 90°C** 0.23 W**Weight Max. (Grams)** 1.0**Core Material** Ferrite

Marking Delevan cage code (99800); 2534; dash number with tolerance letter. Note: An R after 2534 indicates a RoHS component.

Example: 2534R-24K

99800
2534R
-24K

Packaging Bulk only**Made in the U.S.A.**

DASH NUMBER*	INDUCTANCE (mH)	TOLERANCE	TEST FREQUENCY (kHz)	Q MINIMUM	SRF MINIMUM (kHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (mA)
SERIES 2534 FERRITE CORE							
-00K	0.10	± 10%	100	790	4.0	1.5	330
-02K	0.12	± 10%	95	790	3.3	1.8	300
-04K	0.15	± 10%	90	790	3.2	2.0	285
-06K	0.18	± 10%	85	790	2.8	2.2	277
-08K	0.22	± 10%	90	790	2.5	2.4	265
-10K	0.27	± 10%	95	790	2.3	3.2	229
-12K	0.33	± 10%	90	790	2.2	3.4	220
-14K	0.39	± 10%	80	790	2.0	4.1	203
-16K	0.47	± 10%	70	790	1.9	4.5	193
-18K	0.56	± 10%	65	790	1.8	4.8	187
-20K	0.68	± 10%	65	790	1.7	5.4	175
-22K	0.82	± 10%	65	790	1.6	5.8	170
-24K	1.00	± 10%	65	790	1.4	6.4	160
-26K	1.20	± 10%	95	250	1.2	10.0	130
-28K	1.50	± 10%	90	250	1.15	12.0	118
-30K	1.80	± 10%	90	250	1.10	14.0	110
-32K	2.20	± 10%	90	250	0.95	17.0	100
-34K	2.70	± 10%	90	250	0.86	20.0	90
-36K	3.30	± 10%	90	250	0.80	24.0	85
-38K	3.90	± 10%	85	250	0.68	27.0	80
-40K	4.70	± 10%	85	250	0.64	34.0	70
-42K	5.60	± 10%	80	250	0.60	37.0	68
-44K	6.80	± 10%	75	250	0.50	45.0	61
-46K	8.20	± 10%	65	250	0.47	48.0	59
-48K	10.0	± 10%	45	250	0.42	51.0	58
-50L	12.0	± 15%	40	79	0.41	100.0	41
-52L	15.0	± 15%	45	79	0.32	105.0	40
-54L	18.0	± 15%	45	79	0.30	120.0	37
-56L	22.0	± 15%	45	79	0.25	145.0	34
-58L	27.0	± 15%	45	79	0.24	195.0	29
-60L	33.0	± 15%	45	79	0.21	250.0	26
-62L	39.0	± 15%	40	79	0.20	295.0	23
-64L	47.0	± 15%	40	79	0.18	365.0	21.5
-66L	56.0	± 15%	40	79	0.17	430.0	19.5
-68L	68.0	± 15%	30	79	0.15	510.0	18.0
-70L	82.0	± 15%	30	79	0.14	605.0	16.6
-72L	100.0	± 15%	30	79	0.12	670.0	15.8
-74L	120.0	± 15%	30	50	0.11	900.0	13.5
-76L	150.0	± 15%	25	50	0.10	1100.0	12.0

Optional Tolerances: J = 5% H = 3%

*Complete part # must include series # PLUS the dash #

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Delevan:

[2534-24K](#) [2534-28K](#) [2534-46K](#) [2534-66L](#) [2534-00J](#) [2534-00H](#) [2534-02J](#) [2534-02H](#) [2534-04J](#) [2534-04H](#) [2534-06J](#) [2534-06H](#) [2534-08J](#) [2534-08H](#) [2534-10J](#) [2534-10H](#) [2534-12J](#) [2534-12H](#) [2534-14J](#) [2534-14H](#) [2534-16J](#) [2534-16H](#) [2534-18J](#) [2534-18H](#) [2534-20J](#) [2534-20H](#) [2534-22K](#) [2534-22J](#) [2534-22H](#) [2534-24J](#) [2534-24H](#) [2534-26J](#) [2534-26H](#) [2534-28J](#) [2534-28H](#) [2534-30J](#) [2534-30H](#) [2534-32J](#) [2534-32H](#) [2534-34J](#) [2534-34H](#) [2534-36K](#) [2534-36J](#) [2534-36H](#) [2534-38J](#) [2534-38H](#) [2534-40J](#) [2534-40H](#) [2534-42J](#) [2534-42H](#) [2534-44J](#) [2534-44H](#) [2534-46J](#) [2534-46H](#) [2534-48J](#) [2534-48H](#) [2534-50K](#) [2534-50J](#) [2534-50H](#) [2534-52K](#) [2534-52J](#) [2534-52H](#) [2534-54K](#) [2534-54J](#) [2534-54H](#) [2534-56K](#) [2534-56J](#) [2534-56H](#) [2534-58L](#) [2534-58K](#) [2534-58J](#) [2534-58H](#) [2534-60K](#) [2534-60J](#) [2534-60H](#) [2534-62K](#) [2534-62J](#) [2534-62H](#) [2534-64K](#) [2534-64J](#) [2534-64H](#) [2534-66K](#) [2534-66J](#) [2534-66H](#) [2534-68K](#) [2534-68J](#) [2534-68H](#) [2534-70K](#) [2534-70J](#) [2534-70H](#) [2534-72K](#) [2534-72J](#) [2534-72H](#) [2534-74K](#) [2534-74J](#) [2534-74H](#) [2534-76K](#) [2534-76J](#) [2534-76H](#) [2534R-00K](#)