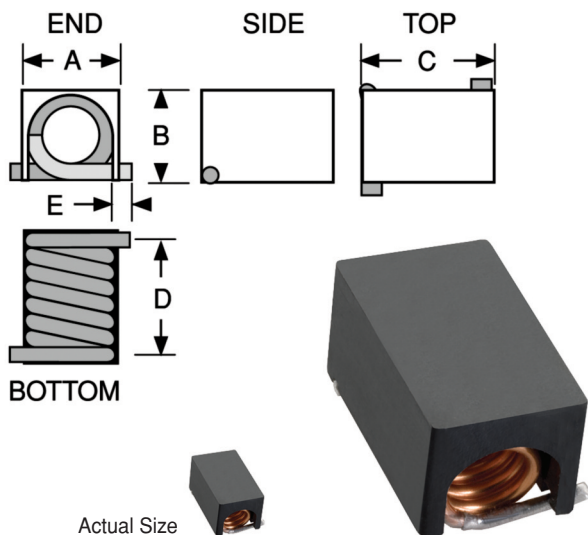


SERIES**5526R
5526****Air Core Inductors**

DASH NUMBER*
INDUCTANCE (nH) ±5%
TURNS (Ref.)
TEST FREQUENCY (MHz)
Q MINIMUM
CURRENT RATING
MAXIMUM (Amps)
SRF MINIMUM (MHz)

SERIES 5526

-1	9	90	95	50	3.5	1140
-2	10	111	87	50	3.5	1020
-3	11	130	87	50	3.0	900
-4	12	169	95	50	3.0	875
-5	13	206	95	50	3.0	800
-6	14	222	92	50	3.0	730
-7	15	246	95	50	3.0	685
-8	16	307	95	50	3.0	660
-9	17	380	95	50	2.5	590
-10	18	420	95	50	2.5	540
-11	19	491	95	50	2.0	535
-12	20	538	87	50	2.0	490

*Complete part # must include series # PLUS the dash #

High Q, wire wound air cores


Designed to operate over a wide frequency range.

Physical Parameters

	Inches	Millimeters
A Max	0.250	6.35
B Max	0.235	5.97
C Max	0.420	10.67
D	0.314±.020	7.98±0.510
E	0.032 ± 0.025	0.813 ± 0.635
F	0.394	10.00
G	0.095	2.42
H	0.185	4.70
I	0.080	2.03
J	0.234	5.95

Operating Temperature Range -55°C to +125°C

Inductance and Q tested on HP4291A using HP16193A test fixture and correlation

Packaging Tape & reel (24mm): 13" reel, 800 pieces max.; 7" reel not available; Intermediate values available upon request.**Made in the U.S.A.**

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Delevan:](#)

[5526-1](#) [5526-10](#) [5526-11](#) [5526-12](#) [5526-2](#) [5526-3](#) [5526-4](#) [5526-5](#) [5526-6](#) [5526-7](#) [5526-8](#) [5526-9](#) [5526R-8](#)
[5526R-9](#) [5526R-6](#) [5526R-2](#) [5526R-4](#) [5526R-1](#) [5526R-5](#) [5526R-7](#) [5526R-3](#) [5526R-11](#) [5526R-10](#) [5526R-12](#)
[5526R-2TR](#)