
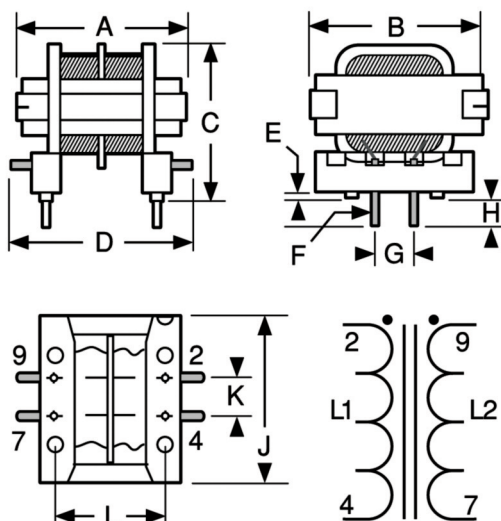


SERIES**CM7560R**
CM7560RoHS
CompliantTraditional
First Quality**PC Mount Common Mode Choke**

Actual Size

**Physical Parameters**

	Inches	Millimeters
A	0.860 ± 0.025	21.8 ± 0.64
B	1.070 ± 0.050	27.2 ± 1.27
C	0.830 ± 0.030	21.1 ± 0.76
D	1.060 (Ref. only)	26.9 (Ref. only)
E	0.040 ± 0.025	1.0 ± 0.64
F	0.025 Sq. (Typ.)	0.64 Sq. (Typ.)
G	0.400 ± 0.010	10.2 ± 0.3
H	0.175 ± 0.015	4.4 ± 0.38
J	1.03 (Ref. only)	26.2 (Ref. only)
K	0.400 ± 0.010	10.2 ± 0.3
L	0.630 ± 0.010	16.0 ± 0.3

Operating Temperature Range -55°C to +125°C**Current Rating at 85°C Ambient** 40°C Rise**Mechanical Configuration** Tape wrapped winding sections; varnish impregnated assembly**Notes** 1) Inductance in table is for either L1 or L2.

2) Leakage Inductance tested at L1 with L2 shorted or at L2 with L1 shorted. 3) Windings balanced within 1%.

DASH NUMBER*

L (μH) L1 or L2
@ 1 kHz ±25%DC RESISTANCE
MAXIMUM (OHMS)CURRENT RATING
MAXIMUM (AMPS)LEAKAGE INDUCTANCE
MAXIMUM (μH)**SERIES CM7560 FERRITE CORE**

-563	56	0.013	5.5	3.5
-683	68	0.013	5.5	3.5
-823	82	0.013	5.5	3.5
-104	100	0.013	5.5	3.5
-124	120	0.015	5.5	4.5
-154	150	0.015	5.5	6.0
-184	180	0.019	4.5	7.0
-224	220	0.020	4.5	7.5
-274	270	0.025	4.5	9.0
-334	330	0.025	3.5	12
-474	470	0.030	3.5	14
-564	560	0.035	3.5	18
-684	680	0.040	3.5	20
-824	820	0.060	2.8	24
-105	1000	0.065	2.8	30
-125	1200	0.095	2.2	35
-155	1500	0.115	1.7	40
-185	1800	0.125	1.7	45
-225	2200	0.170	1.4	55
-275	2700	0.180	1.4	75
-335	3300	0.320	1.1	90
-395	3900	0.400	1.1	100
-475	4700	0.450	0.88	130
-565	5600	0.500	0.88	175
-685	6800	0.600	0.88	220
-825	8200	0.750	0.88	230
-106	10000	0.800	0.70	250
-126	12000	0.900	0.70	300
-156	15000	1.00	0.70	350
-186	18000	1.30	0.55	425
-226	22000	1.50	0.55	475
-276	27000	1.80	0.44	550
-336	33000	2.20	0.44	650
-396	39000	2.60	0.44	800
-476	47000	3.00	0.44	900
-566	56000	4.00	0.35	1100
-686	68000	5.00	0.27	1300
-826	82000	5.50	0.27	1800
-107	100000	6.40	0.27	2100
-127	120000	7.80	0.22	2600
-157	150000	9.00	0.22	3000

*Complete part # must include series # PLUS the dash #

Marking DELEVAN; part number.

Example: CM7560-563

DELEVAN

CM7560-563

Packaging Bulk only

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Delevan:

[CM7560-105](#) [CM7560-563](#) [CM7560-683](#) [CM7560-823](#) [CM7560-104](#) [CM7560-124](#) [CM7560-154](#) [CM7560-184](#)
[CM7560-224](#) [CM7560-274](#) [CM7560-334](#) [CM7560-474](#) [CM7560-564](#) [CM7560-684](#) [CM7560-824](#) [CM7560-125](#)
[CM7560-155](#) [CM7560-185](#) [CM7560-225](#) [CM7560-275](#) [CM7560-335](#) [CM7560-395](#) [CM7560-475](#) [CM7560-565](#)
[CM7560-685](#) [CM7560-825](#) [CM7560-106](#) [CM7560-126](#) [CM7560-156](#) [CM7560-186](#) [CM7560-226](#) [CM7560-276](#)
[CM7560-336](#) [CM7560-396](#) [CM7560-476](#) [CM7560-566](#) [CM7560-686](#) [CM7560-826](#) [CM7560-107](#) [CM7560-127](#)
[CM7560-157](#) [CM9900-683](#) [CM7560-107TR](#) [CM7560R-824](#) [CM7560R-105](#) [CM7560R-476](#) [CM7560R-563](#)
[CM7560R-826](#) [CM7560R-104](#) [CM7560R-335](#) [CM7560R-156](#) [CM7560R-474](#) [CM7560R-565](#) [CM7560R-127](#)
[CM7560R-155](#) [CM7560R-275](#) [CM7560R-475](#) [CM7560R-106](#) [CM7560R-226](#) [CM7560R-823](#) [CM7560R-396](#)
[CM7560R-185](#) [CM7560R-825](#) [CM7560R-224](#) [CM7560R-154](#) [CM7560R-157](#) [CM7560R-184](#) [CM7560R-126](#)
[CM7560R-276](#) [CM7560R-274](#) [CM7560R-124](#) [CM7560R-334](#) [CM7560R-684](#) [CM7560R-685](#) [CM7560R-683](#)
[CM7560R-186](#) [CM7560R-686](#) [CM7560R-566](#) [CM7560R-107](#) [CM7560R-336](#) [CM7560R-125](#) [CM7560R-564](#)
[CM7560R-225](#) [CM7560R-395](#)