## #B966AS-1R2N=P3














REACH

< List of part numbers with package codes > #B966AS-1R2N=P3

#### Shape

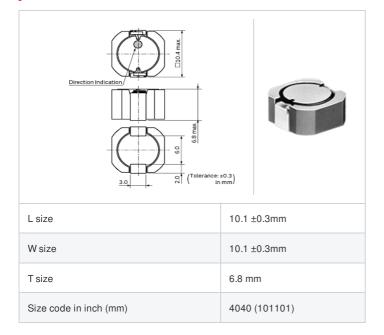



Rated current (Isat) is specified when the decrease of the initial inductance value at 10%.

Rated current (Itemp) is specified when temperature of the inductor is raised 40  $^{\circ}\text{C}$  by DC current.

### References

Packaging code	Specifications	Minimum quantity
=P3	φ330mm Embossed taping	500

	Mass (Typ.)	
1 piece		2.575g

#### Specifications

Inductance	1.2μH ±30%
Inductance test frequency	0.1MHz
Rated current (Isat) (Based on Inductance change)	12000mA
Rated current (Itemp) (Based on Temperature rise)	7200mA
Max. of DC resistance	0.011Ω
Operating temperature range (Self-temperature rise is included)	-40°C to 85°C
Class of magnetic shield	Ferrite Core
Series	DS106C2

1 of 2



<sup>1.</sup> This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




<sup>2.</sup> This datasheet has only typical specifications because there is no space for detailed specifications

#### Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

Inductance-Current characteristics (Typ.)



Temperature rise characteristics (Typ.)

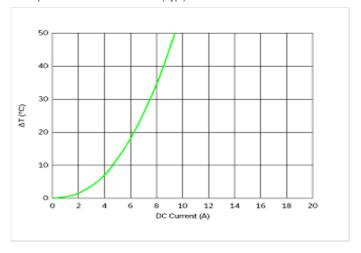

2 of 2



1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

#B966AS-1R2N=P3