


RF1353C

**345.00 MHz
SAW Filter**

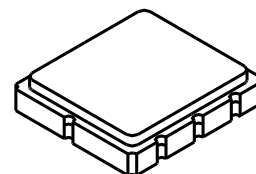

SM5050-8 Case

- **Designed for 345 MHz Wireless Applications**
- **Advanced (Lithium Tantalate) LiTaO₃ design for low Insertion Loss**
- **Designed for match to 50 ohms, no external LC required**
- **Hermetically sealed Surface Mount package**

Absolute Maximum Ratings

Rating	Value	Units
Maximum Input Power	+10	dBm
Maximum DC Voltage Between Terminals	30	VDC
Case Temperature	-40 to +85	°C

Characteristic	Sym	Notes	Minimum	Typical	Maximum	Units
Nominal Operating Frequency	f_C			345		MHz
Passband	Insertion Loss	IL			4.5	dB
	3.0 dB Bandwidth		$f_C \pm 70$	$f_C \pm 430$	$f_C \pm 1100$	kHz
Rejection	$f_C - 10.7$ MHz		15			dB
	$f_C - 21.4$ MHz		40			dB
Matching	Untuned response			50		Ω
Ambient Temperature	Operating Range		-10		70	°C
Footprint: 5.0 X 5.0 mm			SM5050-8			
Lid Symbolization (YY=Year, WW=week, S=shift)			446,YWWS			

Electrical Connections

Connection	Terminals
RF Input	2
RFOutput	6
Case Ground	All Others



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:


1. All specifications apply over the operating temperature range with filter soldered to the specified demonstration board unless noted otherwise.
2. Ultimate rejection is dependent on PCB layout.
3. Specifications subject to change without notice.
4. Electrostatic Sensitive Device. Observe precautions for handling.
5. US and international patents may apply.
6. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.

Discontinued

SM5050-8 Case

8-Terminal Ceramic Surface-Mount Case

5.0 X 5.0 mm Nominal Footprint

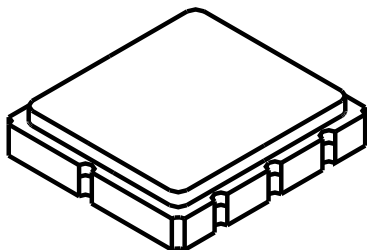


Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	4.8	5.0	5.2		0.1968	
B	4.8	5.0	5.2		0.1968	
C			1.7			0.0669
D		2.08			0.0818	
E		1.17			0.046	
F		0.64			0.0252	
G	2.39	2.54	2.69		0.100	


Electrical Connections

Connection		Terminals
Port 1	Differential Input	1, 2
Port 2	Differential Output	5, 6
	Ground	All others
Single-ended Operation		Return is ground
Differential Operation		Return is hot
Dot indicates Pin 1		



TOP VIEW

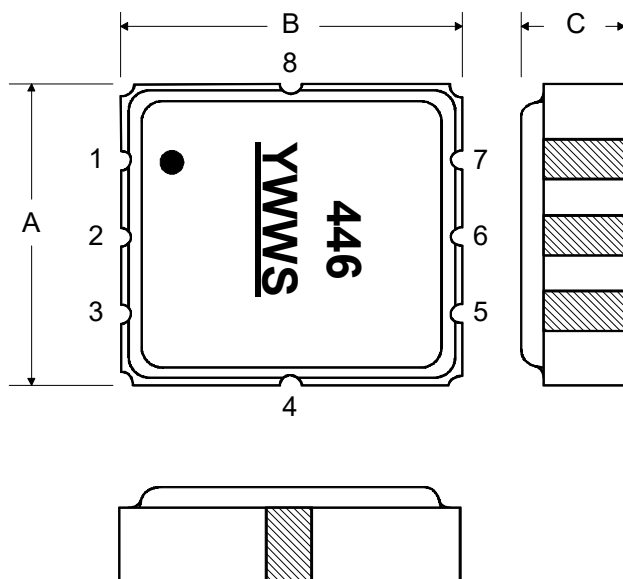

BOTTOM VIEW


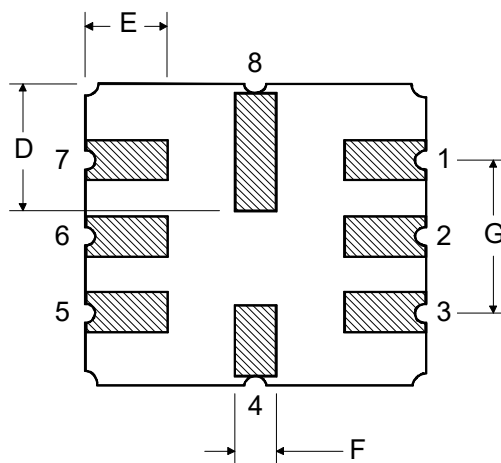


Discontinued

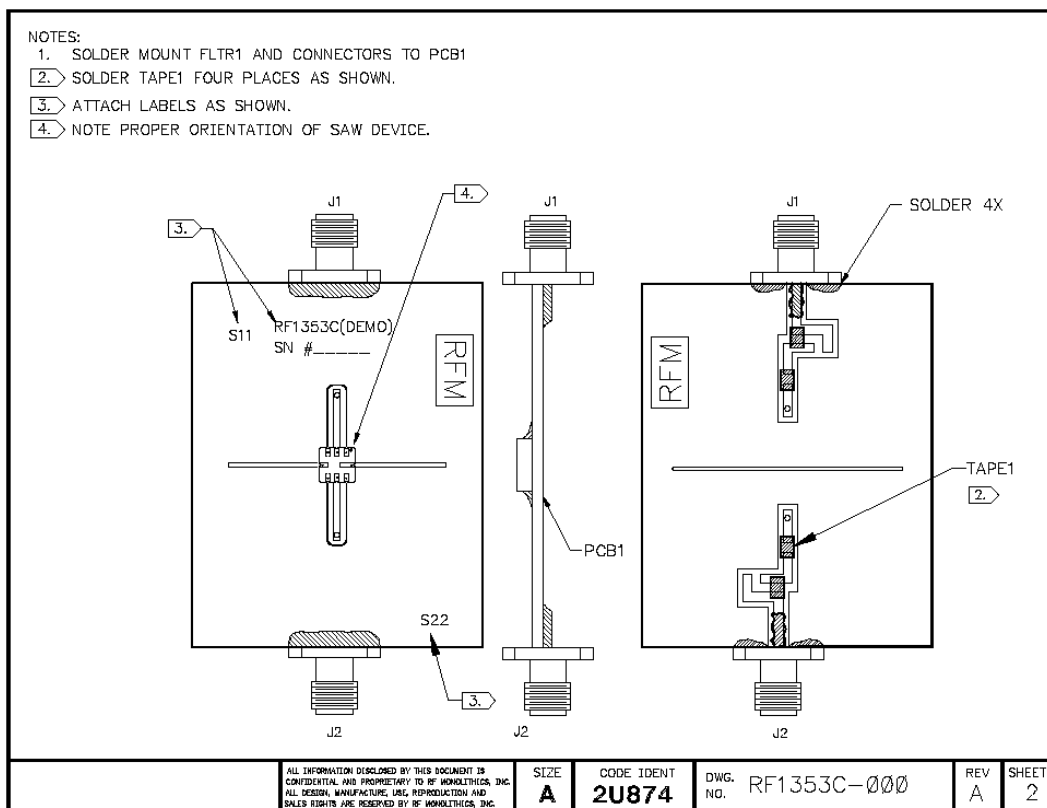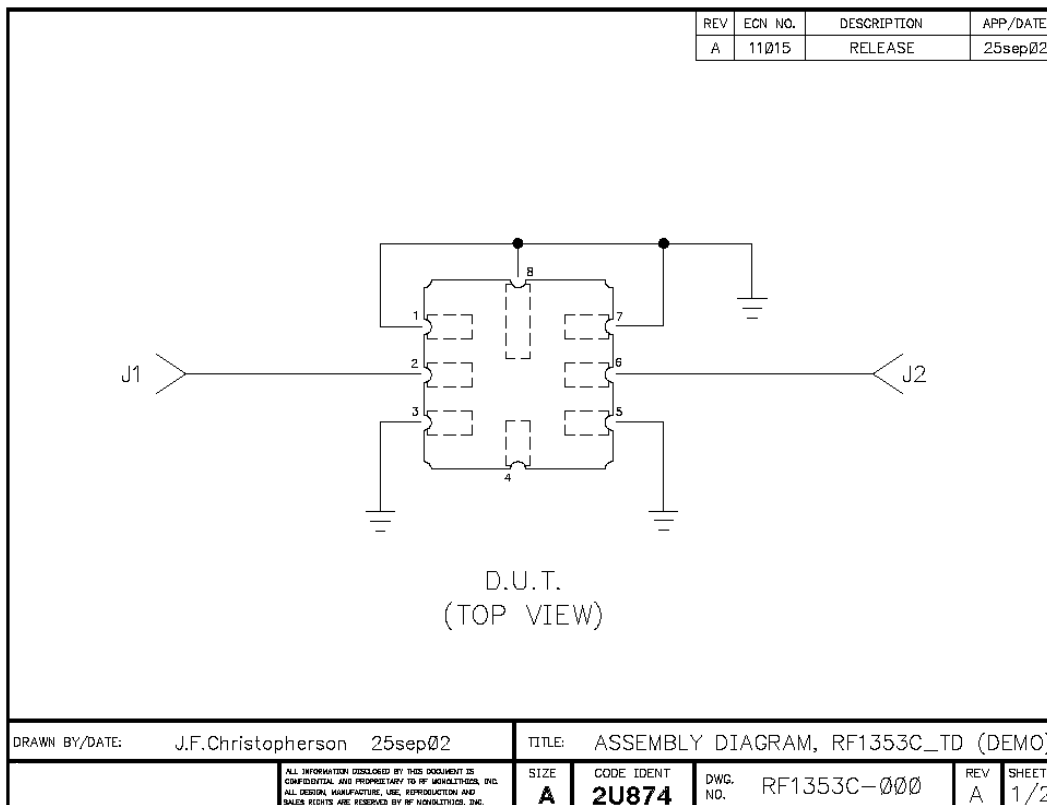

Discontinued

RF1353C

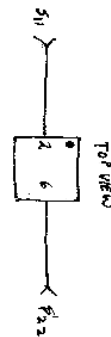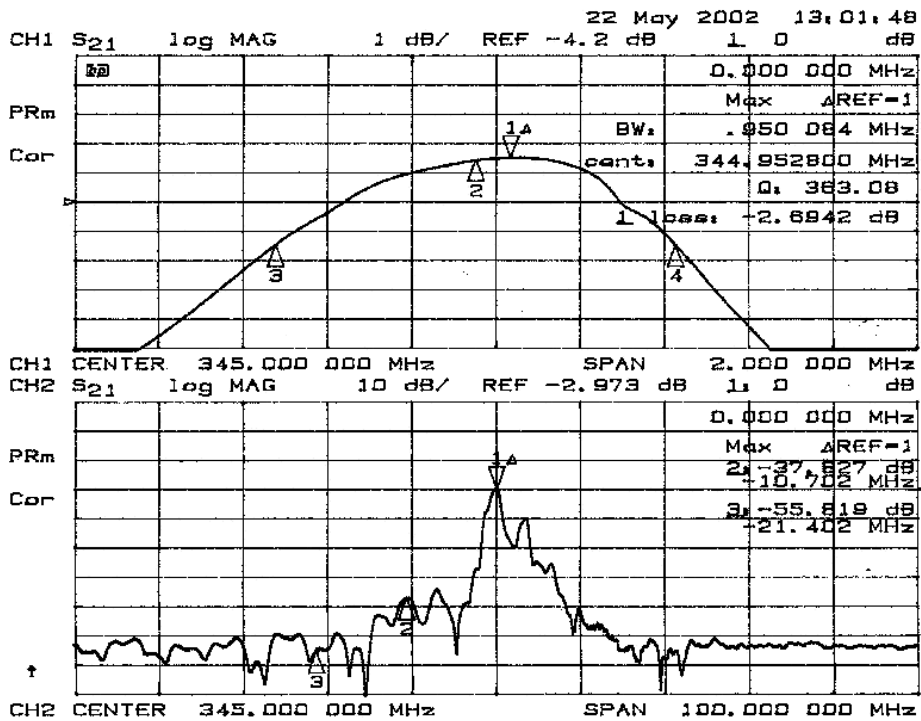


22 May 2002 13:06:59

CH1 S₁₁ 1 U FS 1 45.432 n 4.3457 n 2.0048 nH

PRm

Cor

345.000 000 MHz

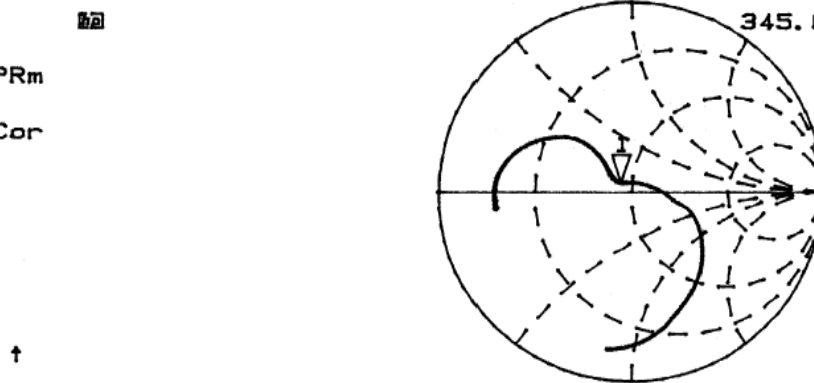


CH2 S₂₂ 1 U FS 1 46.686 n 2.0625 n 951.47 pH

PRm

Cor

345.000 000 MHz

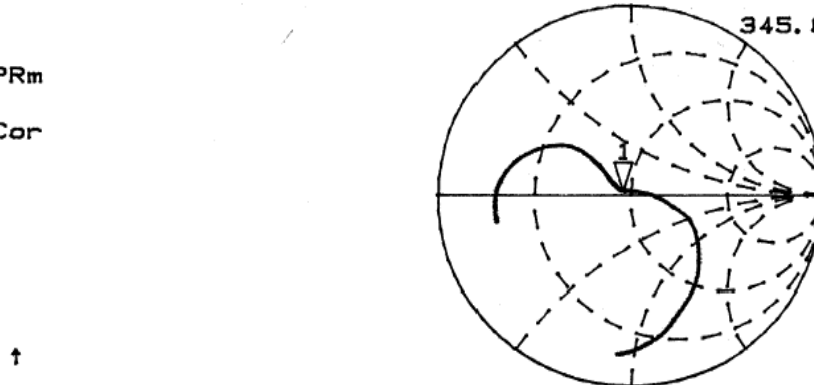

CENTER 345.000 000 MHz SPAN 2.000 000 MHz

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Murata:](#)

[RF1353C](#)