

- No Matching Network Required for 50 Ω Operation
- Surface-mount 3.0 x 3.0 mm Package
- Complies with Directive 2002/95/EC (RoHS)




Absolute Maximum Ratings

Rating	Value	Units
Input Power Level	10	dBm
DC Voltage on any Non-ground Terminal	3	V
Operating Temperature Range	-55 to +85	°C
Storage Temperature Range in Tape and Reel	-40 to +85	°C
Component Storage Temperature Range	-55 to +95	°C
Solder Reflow Temperature, 10 seconds, 5 cycles maximum	260	°C

SF2211E

1200 MHz SAW Filter




SM3030-6

Electrical Characteristics

Characteristic	Sym	Notes	Min	Typ	Max	Units
Center Frequency	f _C			1200		MHz
Insertion Loss, 1180 to 1220 MHz	IL			2.8	4.0	dB
Attenuation, 0 dB Reference:						dB
1080 MHz			35	60		
1100 MHz			45	60		
1300 MHz			40	48		
1320 MHz			35	52		
Source Impedance	Z _S			50		Ω
Load Impedance	Z _L			50		
Case Style		SM3030-6 3.0 x 3.0 mm Nominal Footprint				
Lid Symbolization (Y=year, WW=week, S=shift) dot=pin 1 indicator		945, YWWS				
Standard Reel Quantity	Reel Size 7 Inch	500 Pieces/Reel				
	Reel Size 13 Inch	3000 Pieces/Reel				

Electrical Connections

Connection	Terminals
Port 1	2
Port 2	5
Case Ground	All others


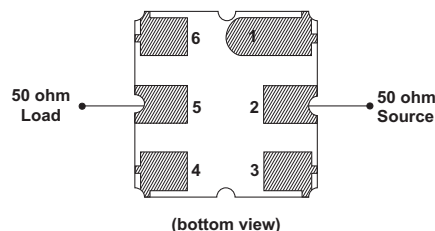


CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


Notes:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, f_c .
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
7. US and international patents may apply.
8. Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.


Filter Frequency Response

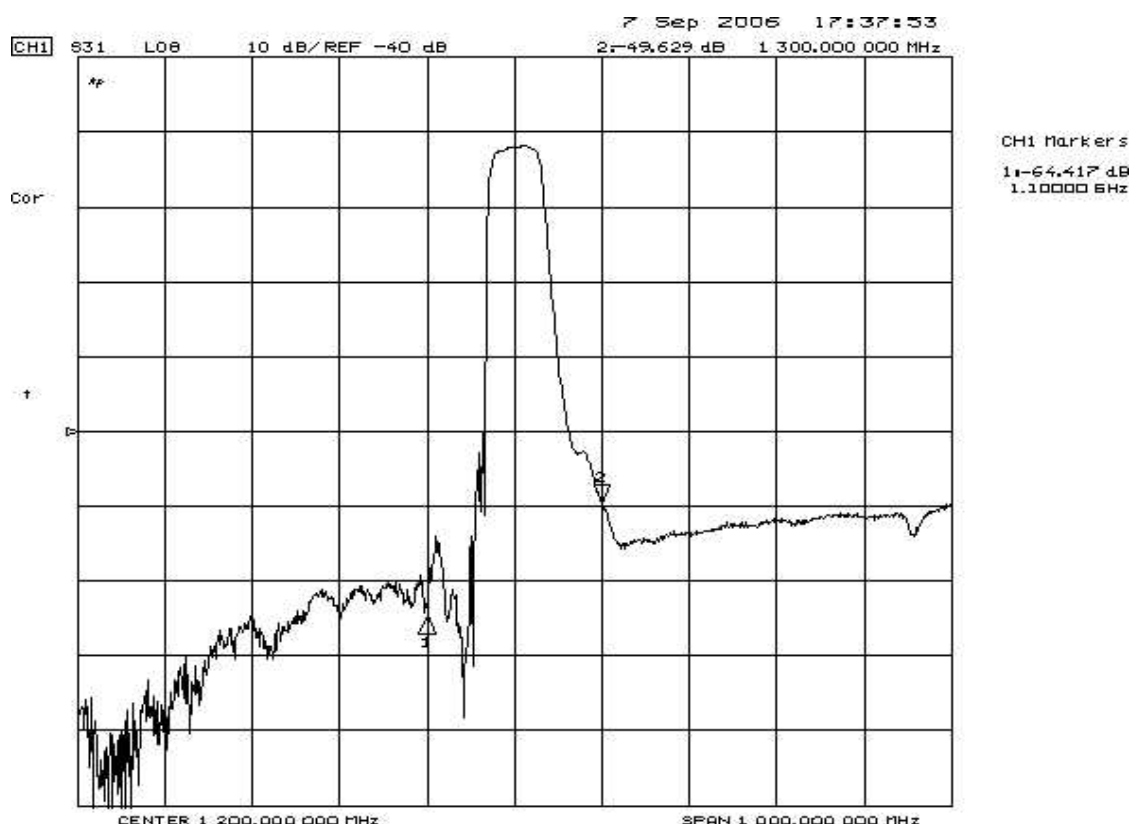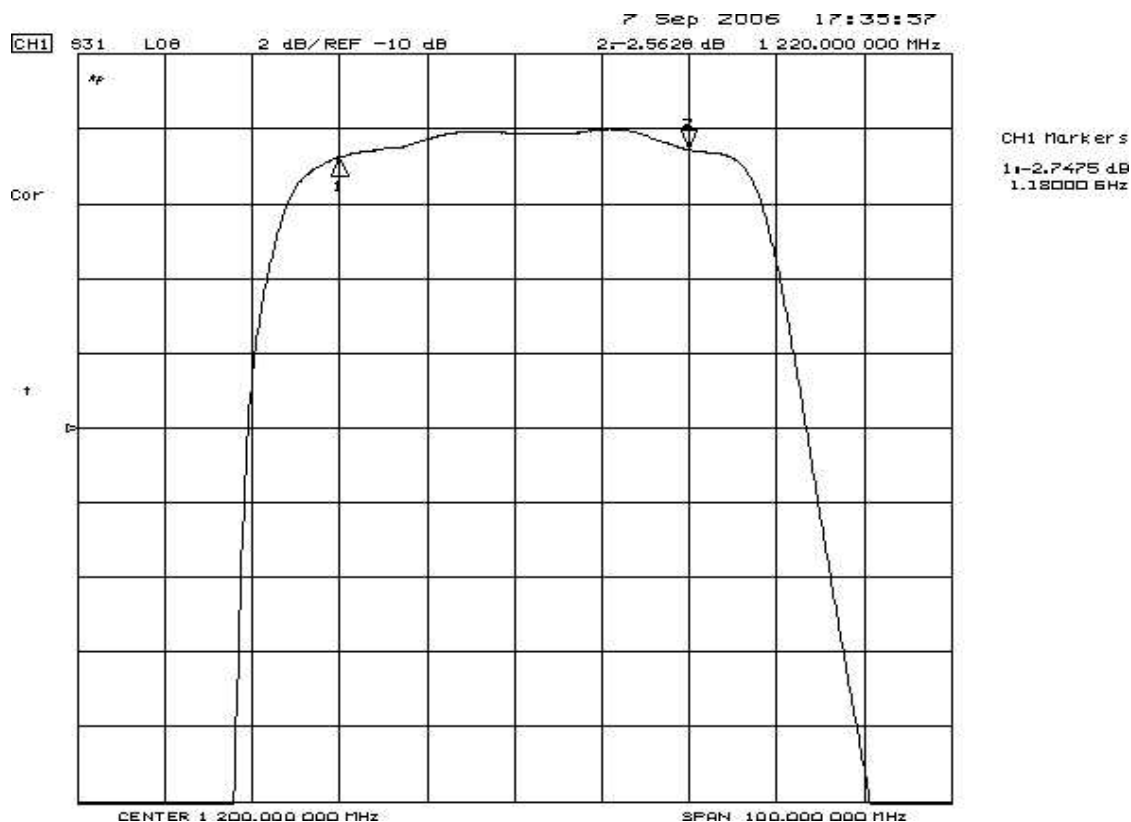

Filter Input Impedance

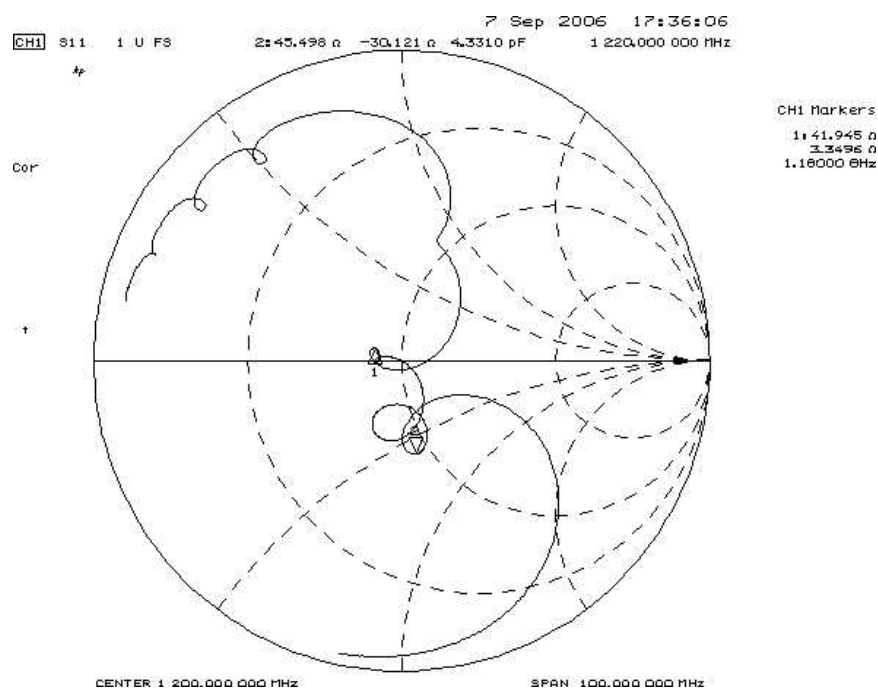



Filter Output Impedance

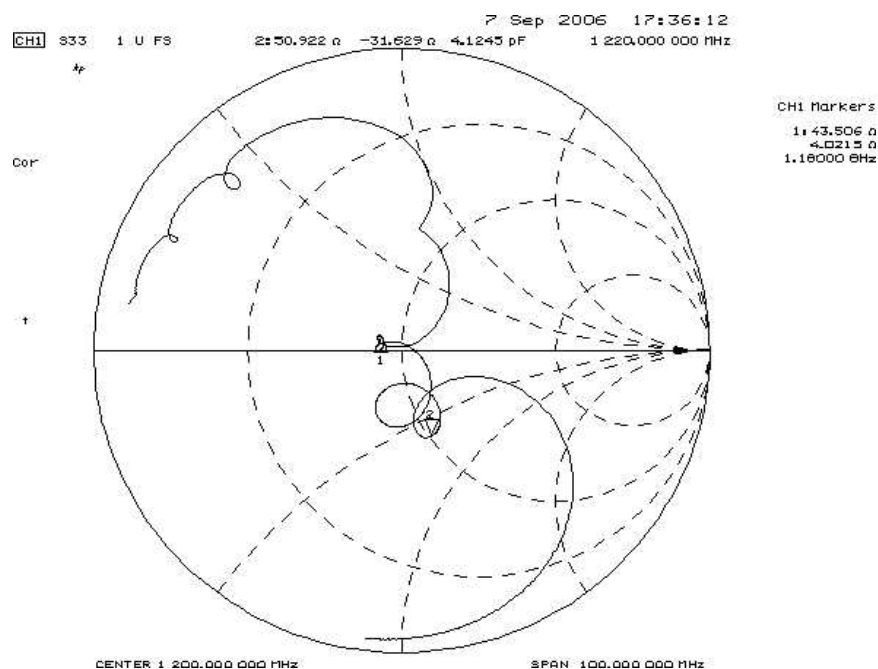

SM3030-6 Case

6-Terminal Ceramic Surface-Mount Case

3.0 X 3.0 mm Nominal Footprint

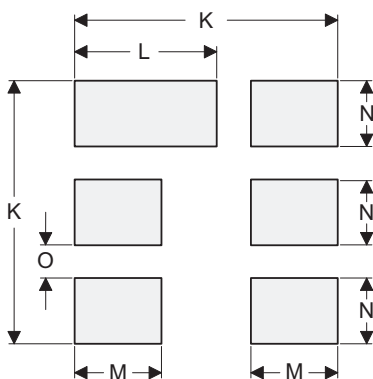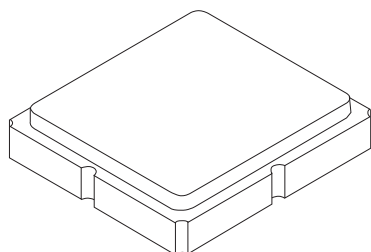

PCB Footprint Top View


Case and PCB Footprint Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	2.87	3.00	3.13	0.113	0.118	0.123
B	2.87	3.00	3.13	0.113	0.118	0.123
C	1.12	1.25	1.38	0.044	0.049	0.054
D	0.77	0.90	1.03	0.030	0.035	0.040
E	2.67	2.80	2.93	0.105	0.110	0.115
F	1.47	1.60	1.73	0.058	0.063	0.068
G	0.72	0.85	0.98	0.028	0.033	0.038
H	1.37	1.50	1.63	0.054	0.059	0.064
I	0.47	0.60	0.73	0.019	0.024	0.029
J	1.17	1.30	1.43	0.046	0.051	0.056
K		3.20			0.126	
L		1.70			0.067	
M		1.05			0.041	
N		0.81			0.032	
O		0.38			0.015	



Case Materials

Materials	
Solder Pad Plating	0.3 to 1.0 μ m Gold over 1.27 to 8.89 μ m Nickel
Lid Plating	2.0 to 3.0 μ m Nickel
Body	Al ₂ O ₃ Ceramic
Pb Free	

Top View

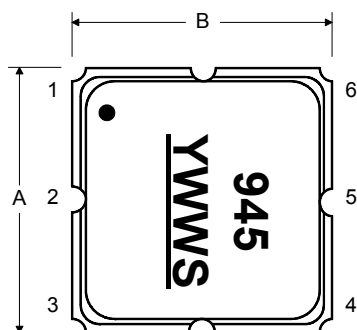

Bottom View

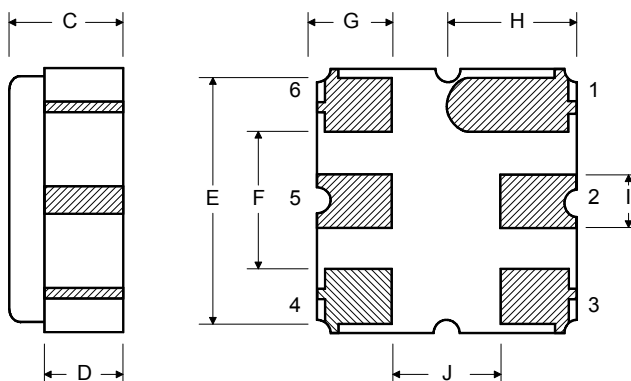

Technical drawing of a circular component, likely a flange or end plate, showing three views: a top view, a side view, and a detail view.


Top View: A large circle with a smaller concentric circle in the center. A crosshair indicates the center. A leader line points from the text "See Detail 'A'" to the central hole.

Side View: A vertical cross-section showing the thickness of the component. The total thickness is dimensioned as 12.0. The central hole is dimensioned with a diameter of 100 REF. and a depth of "B" REF.

Detail View (Detail A): A cross-section of the central hole. It shows a circular hole with a diameter of 20.2. The hole is surrounded by a ring with a thickness of 2.0. The outer diameter of the ring is dimensioned as 13.0.

“B”		Quantity Per Reel
Inches	millimeters	
7	178	500
13	330	3000

Carrier Tape Dimensions	
Ao	3.35 mm
Bo	3.35 mm
Ko	1.40 mm
Pitch	8.0 mm
W	12.0 mm

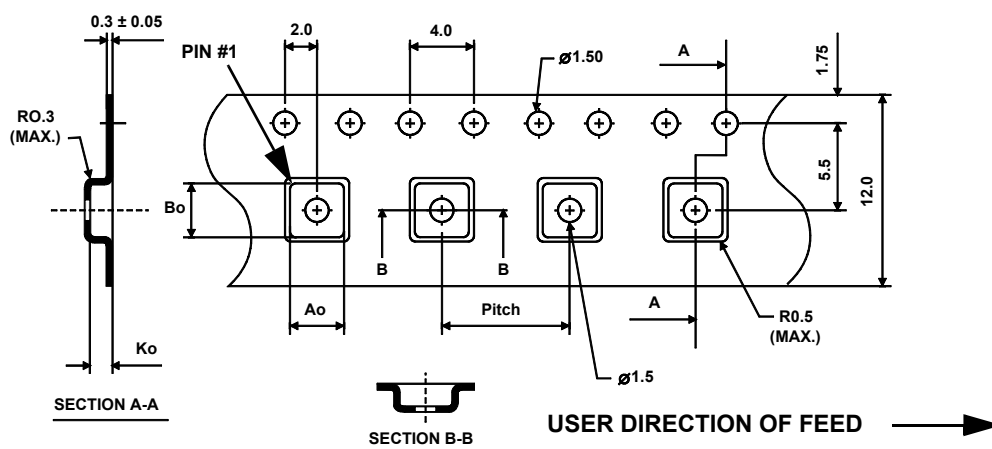

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Murata:](#)

[SF2211E](#)