

Step-Down switching regulator IC with standby function

■ GENERAL DESCRIPTION

The **NJU7632** is a low voltage operation high-speed switching regulator control IC for step-down converter, with a standby function. It incorporates a totem pole output, which can drive an external MOS-FET easily. The NJU7632 also has a soft-start function, dead time control and timer latch for short circuit protection and their times are all adjustable with external parts. Further the internal standby function minimize the current during non-active condition. It is available in a small and thin 8-lead MSOP (TVSP) package, and it is suitable for battery powered applications.

■ PACKAGE OUTLINE




NJU7632RB1
(MSOP8 (TVSP8))

■ FEATURES

- PWM switching control
- Standby Function
- Operating Voltage 2.2V to 8V
- Wide Oscillator Range 300kHz to 1MHz
- Maximum Duty Cycle 100%
- Quiescent Current Operating :800μA typ.
Standby :1μA max.
Internal :16ms typ. or adjustable
- Soft-Start Function
- Dead Time Control
- Timer Latch for Short Circuit Protection
- C-MOS Technology
- Package Outline NJU7632RB1 : MSOP8 (TVSP8)*


*MEET JEDEC MO-187-DA / THIN TYPE

■ PRODUCT VARIATION

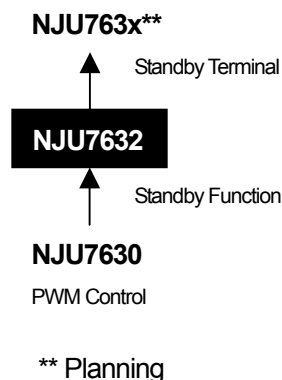

** Planning


■ PIN CONFIGURATION



PIN FUNCTION

1. OUT
2. V⁺
3. FB
4. IN-
5. SCP
6. DTC
7. RT
8. GND

■ BLOCK DIAGRAM

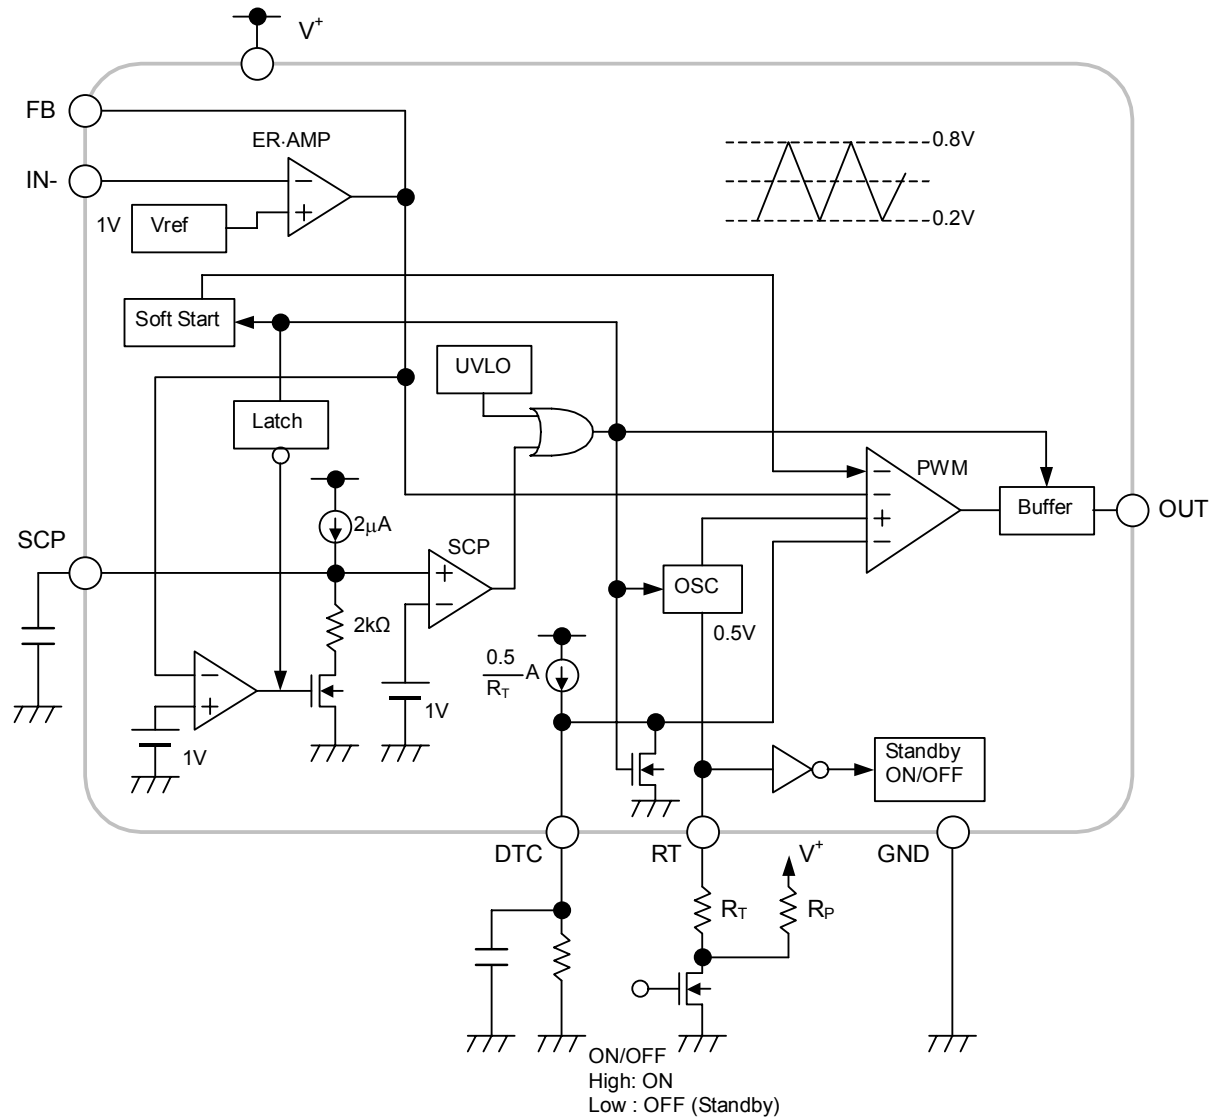

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	MAXIMUM RATINGS	UNIT
Supply Voltage	V ⁺	+9	V
Output Pin Current	I _O	±50	mA
Power Dissipation	P _D	MSOP8 (TVSP8) :320	mW
Operating Temperature Range	T _{OPR}	-40 to +85	°C
Storage Temperature Range	T _{STG}	-40 to +125	°C

■ RECOMMENDED OPERATING CONDITIONS

(Ta=25°C)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V ⁺	2.2	—	8	V
Oscillator Timing Resistor	R _T	30	47	120	kΩ
Oscillation Frequency	f _{OSC}	300	700	1,000	kHz

■ ELECTRICAL CHARACTERISTICS

(V⁺=3.3V, R_T=47kΩ, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
-----------	--------	----------------	------	------	------	------

Under Voltage Lockout Block

ON Threshold Voltage	V _{T_ON}	V ⁺ = L → H	1.9	2.0	2.1	V
OFF Threshold Voltage	V _{T_OFF}	V ⁺ = H → L	1.8	1.9	2.0	V
Hysteresis Voltage	V _{HYS}		60	100	—	mV

Soft Start Block

Soft Start Time	T _{SS}	V _{T_ON} → Duty=80%	8	16	24	ms
-----------------	-----------------	------------------------------	---	----	----	----

Short Circuit Protection Block

Input Threshold Voltage	V _{T_PC}	FB Pin	0.95	1.00	1.05	V
Charge Current	I _{CHG}	V _{SCP} =0V	1.5	2	2.5	μA
Latch Mode ON Threshold Voltage	V _{T_LA}	SCP Pin	0.95	1.00	1.05	V
Latch Mode OFF Threshold Voltage	V _{T_LAOFF}	SCP Pin	0.2	0.45	0.7	V

Oscillator Block

RT Pin Voltage	V _{RT}		-5%	0.5	+5%	V
Oscillation Frequency	f _{OSC}		630	700	770	kHz
Oscillate Supply Voltage Fluctuations	f _{DV}	V ⁺ =2.2V to 8V	—	1	—	%
Oscillate Temperature Fluctuations	f _{DT}	Ta=-40°C to +85°C	—	3	—	%
Standby RT Terminal Resistance	R _{T_STB}		—	2	—	MΩ

■ ELECTRICAL CHARACTERISTICS

($V^+=3.3V$, $R_T=47k\Omega$, $T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
-----------	--------	----------------	------	------	------	------

Error Amplifier Block

Reference Voltage	V_B		-1.0%	1.00	+1.0%	V
Input Bias Current	I_B		-0.1	—	0.1	μA
Open Loop Gain	A_V		—	80	—	dB
Gain Bandwidth Product	G_B		—	1	—	MHz
Output Source Current	I_{OM+1}	$V_{FB}=1V$, $V_{IN}=0.9V$	20	45	70	mA
	I_{OM+2}	$V_{FB}=1V$, $V_{IN}=0.9V$, $V^+=2.2V$	4	9	16	mA
Output Sink Current	I_{OM-}	$V_{FB}=1V$, $V_{IN}=1.1V$	0.10	0.16	0.22	mA

PWM Complete Block

Input Threshold Voltage	V_{T0}	Duty=0%	0.16	0.22	0.28	V
	V_{T50}	Duty=50%	0.44	0.5	0.56	V
Maximum Duty Cycle	$M_{AX}D_{UTY1}$	$V_{FB}=0.9V$	100	—	—	%
	$M_{AX}D_{UTY2}$	$V_{FB}=0.9V$, $R_{DTC}=47k\Omega$	40	50	60	%

Output Block


Output High Level ON Resistance	R_{OH}	$I_O=-20mA$	—	10	20	Ω
Output Low Level ON Resistance	R_{OL}	$I_O=+20mA$	—	5	10	Ω

General Characteristics

Quiescent Current	I_{DD}	$R_L=Non\ Load$	—	800	1200	μA
Standby Quiescent Current	I_{DD_STB}	$R_T=Open$	—	—	1.0	μA

■ TYPICAL APPLICATIONS


Step-Down Converter

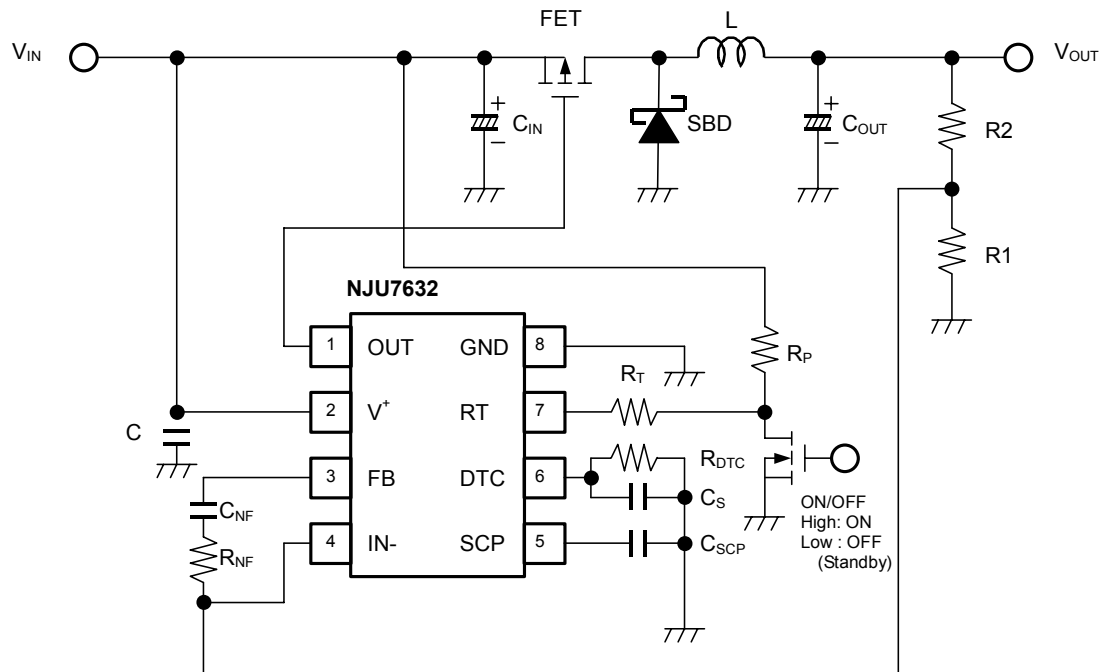

■TYPICAL CHARACTERISTICS


Oscillation Frequency vs. Timing Resistance

($V^+ = 3.3\text{V}$, $T_a = 25^\circ\text{C}$)

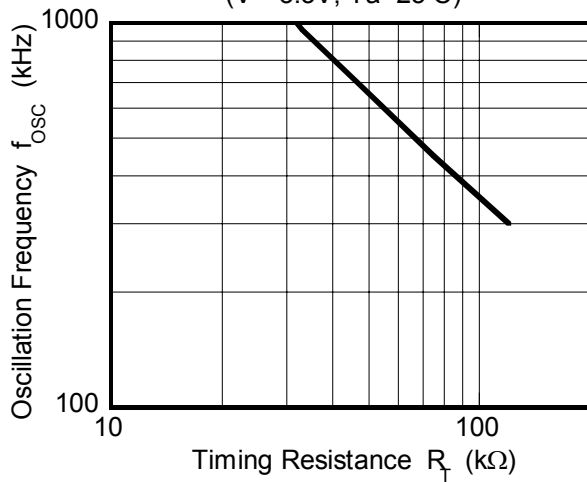


Oscillation Frequency vs. Operating Voltage

($R_T = 47\text{k}\Omega$, $T_a = 25^\circ\text{C}$)

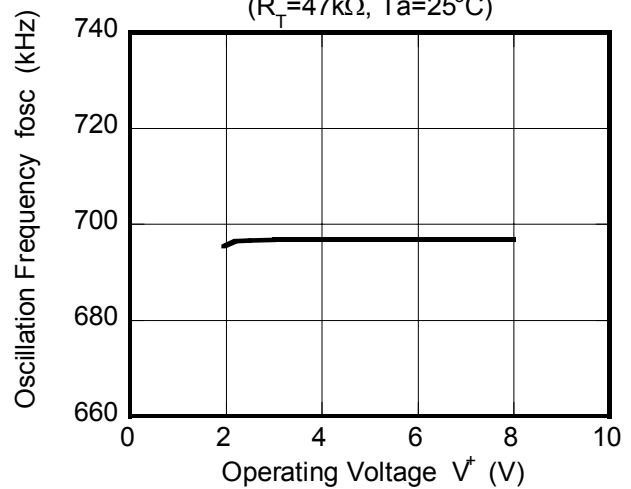



Duty Cycle vs. R_{DTC}

($V^+ = 3.3\text{V}$, $R_T = 47\text{k}\Omega$, $T_a = 25^\circ\text{C}$)






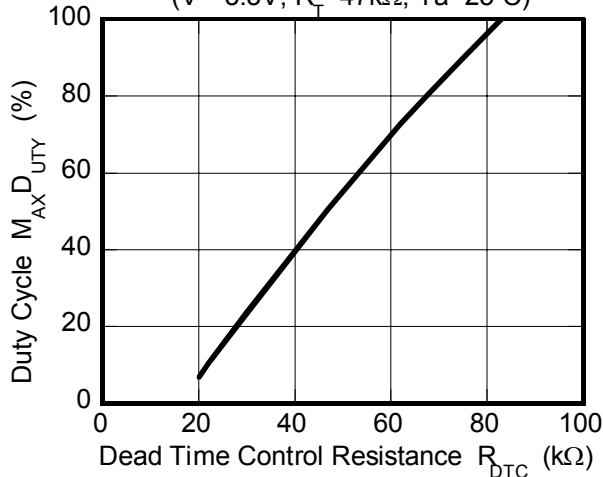


Reference Voltage vs. Operating Voltage







($T_a = 25^\circ\text{C}$)

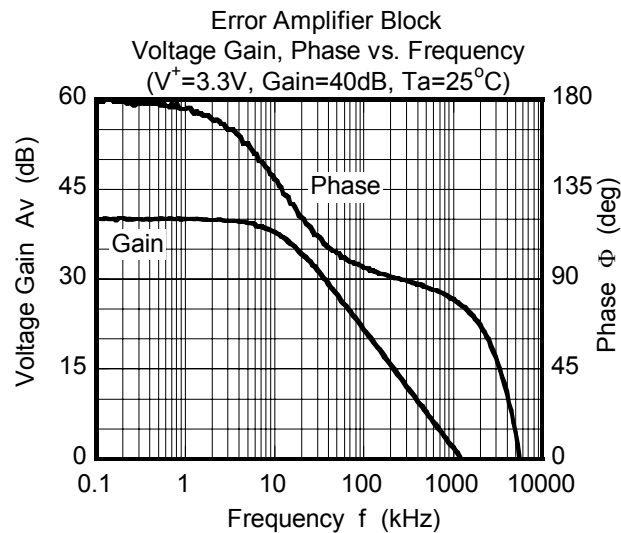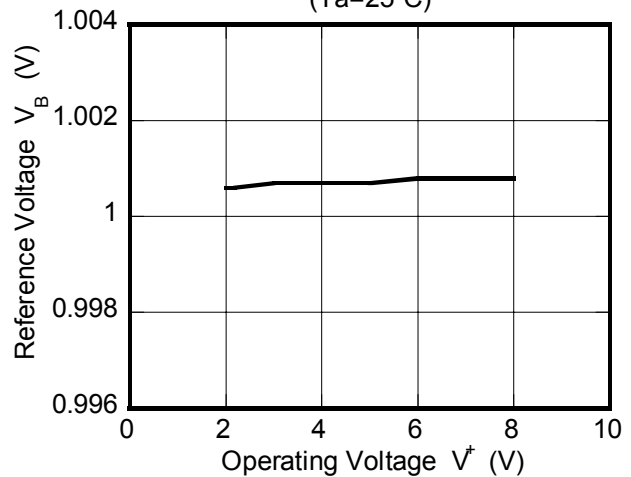

■ TYPICAL CHARACTERISTICS

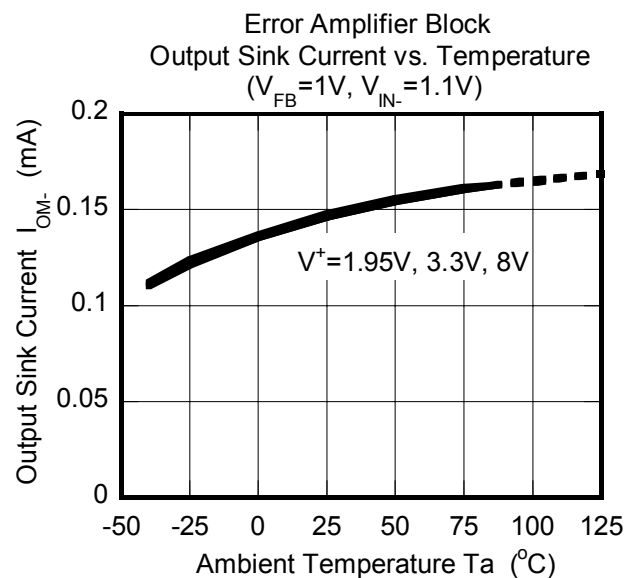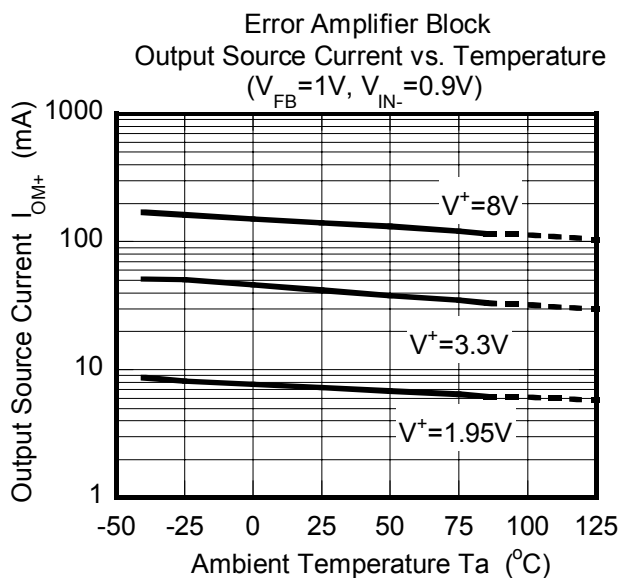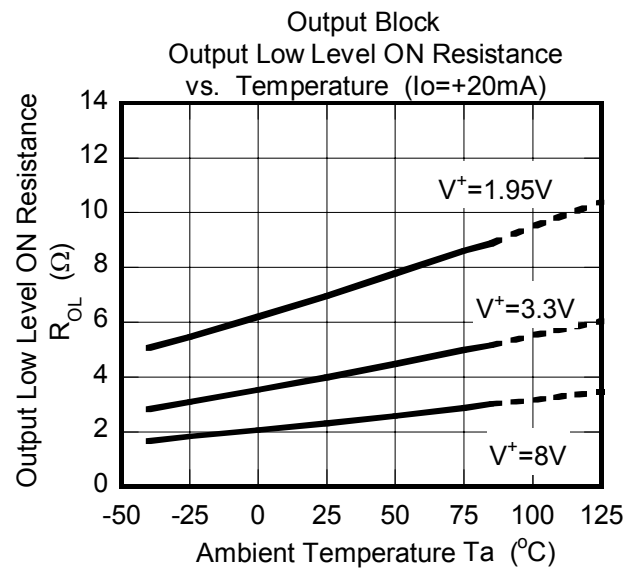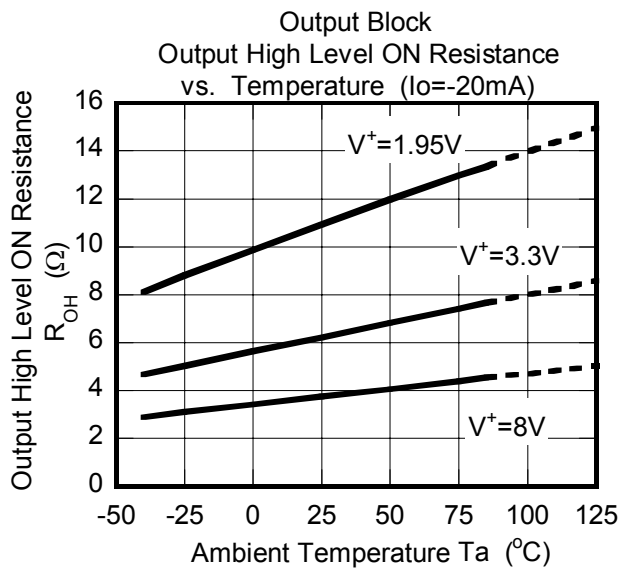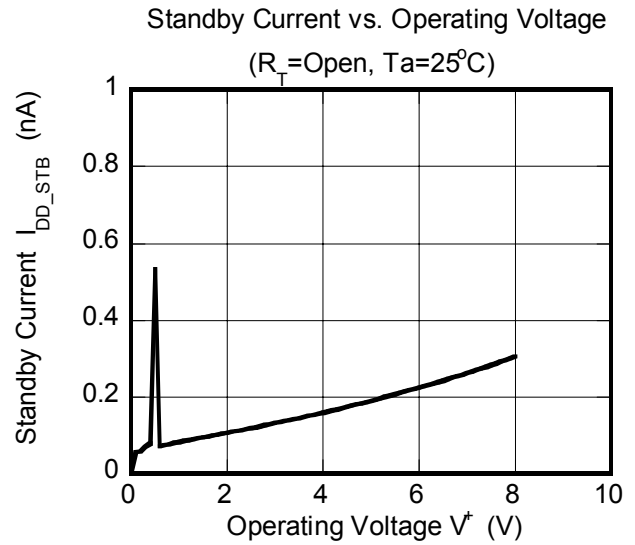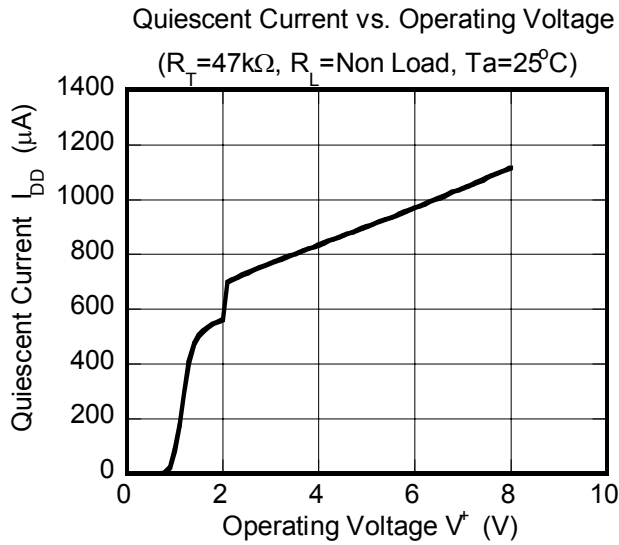

■ TYPICAL CHARACTERISTICS

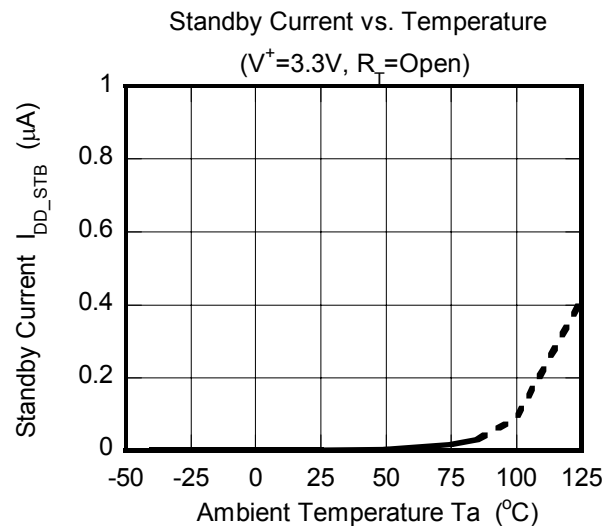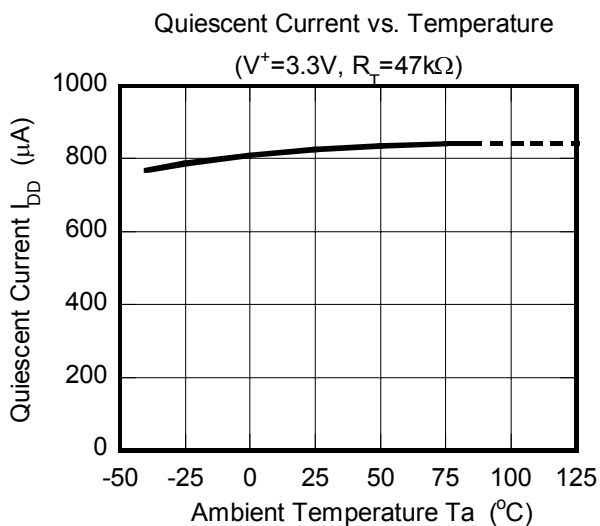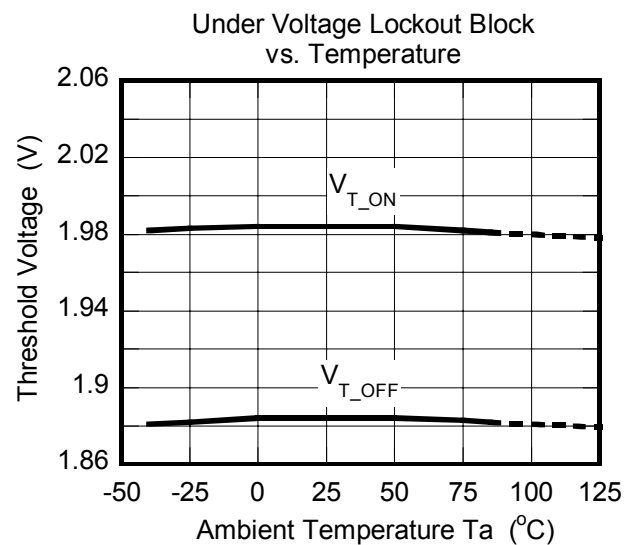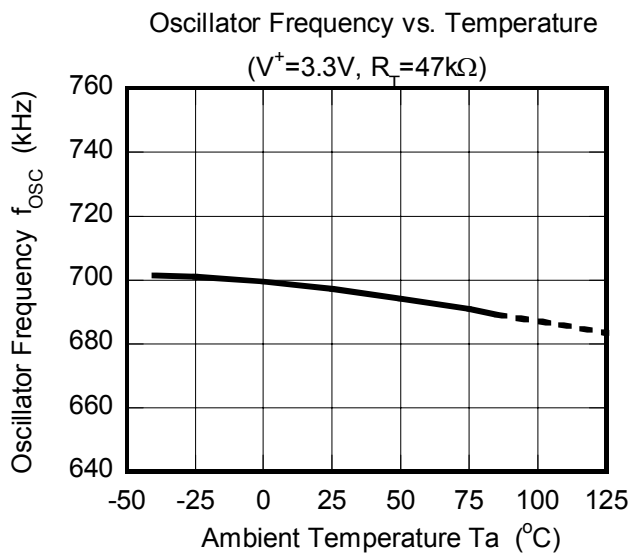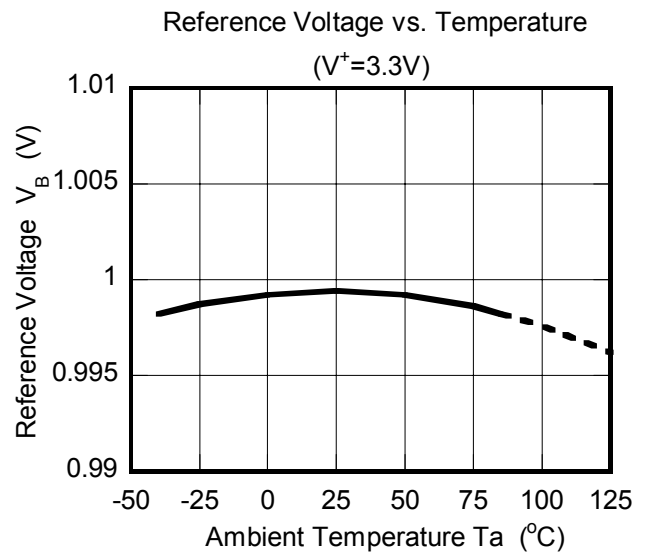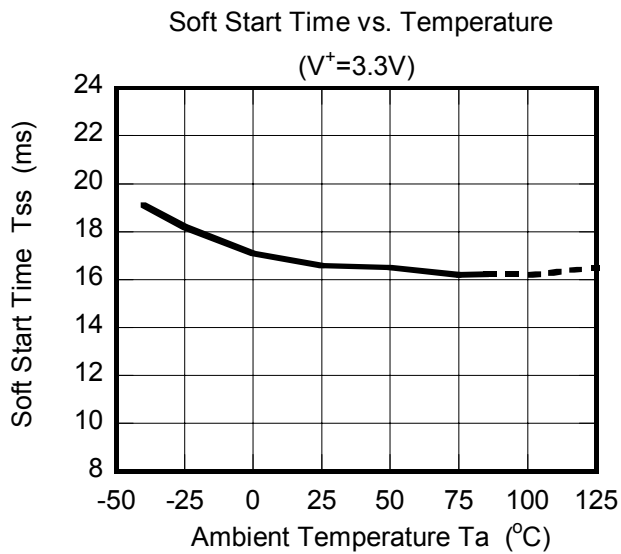

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nisshinbo Micro Devices:

[NJU7632RB1-TE1](#)