

General Specifications

B Electrical Capacity (Resistive Load)

Power Level (silver):	6A @ 125V AC & 3A @ 250V AC 4A @ 30V DC for On-None-On; 3A @ 30V DC for all other circuits
Logic Level (gold):	0.4VA maximum @ 28V AC/DC maximum (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
Logic/Power Level (gold over silver):	Combines silver & gold ratings Note: Find additional explanation of dual rating & operating range in Supplement section.

Other Ratings

Contact Resistance:	10 milliohms maximum for silver; 20 milliohms maximum for gold
Insulation Resistance:	1,000 megohms minimum @ 500V DC
Dielectric Strength:	1,000V AC minimum between contacts for 1 minute minimum; 1,500V AC minimum between contacts and case for 1 minute minimum
Mechanical Life:	50,000 operations minimum
Electrical Life:	25,000 operations minimum for silver; 50,000 operations minimum for gold; 50,000 operations minimum for silver at 3A @ 125V AC
Angle of Throw:	25°

Materials & Finishes

Actuator Clip & Mounting Frame:	Stainless Steel
Body Frame:	Stainless steel
Case:	Diallyl phthalate resin (UL94V-0)
Movable Contactor:	Phosphor bronze with silver or gold plating
Movable Contacts:	Silver alloy (code W); copper with gold plating (code G); or silver alloy with gold plating (code A)
Stationary Contacts:	Silver with silver plating (code W); copper or brass with gold plating (code G); or silver with gold plating (code A)
Terminals:	Copper or brass with silver plating; or copper or brass with gold plating

Environmental Data

Operating Temp Range:	-30°C through +85°C (-22°F through +185°F)
Humidity:	90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration:	10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock:	50G (490m/s ²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Processing

Soldering:	Wave Soldering (PC version) for Gold: See Profile A in Supplement section. Manual Soldering for Gold: See Profile A in Supplement section. Wave Soldering (PC version) for Silver: See Profile B in Supplement section. Manual Soldering for Silver: See Profile B in Supplement section. Note: Actuator must be in OFF (center) position while soldering.
Cleaning:	These devices are not process sealed. Hand clean locally using alcohol based solution.

Standards & Certifications

Flammability Standards:	UL94V-0 for case
UL:	File No. E44145 - Recognized only when ordered with marking on switch. Add "/U" or "/CUL" before first dash in part number to order UL recognized switch. All models recognized at 6A @ 125V AC, 3A @ 250V AC or 0.4VA maximum @ 28V DC maximum.
CSA:	File No. 023535_0_000 - Certified only when ordered with marking on switch. Add "/C" before first dash in part number to order CSA certified switch. All models certified at 6A @ 125V AC or 3A @ 250V AC or 0.4VA maximum @ 28V maximum.

Distinctive Characteristics

Three methods of panel mounting: flat frame for flush with face or subpanel, snap-in, and PCB.

High insulating barriers increase isolation of circuits in multipole devices and provide added protection to contact points.


The molded diallyl phthalate case has a UL 94V-0 flammability rating.

Epoxy sealed terminals prevent entry of solder flux and other contaminants.



Prominent external insulating barriers increase insulation resistance and dielectric strength.

Bias guard prevents misalignment of contacts; interlocking of actuator block with rocker and internal guide does not allow transmission of diagonal force on rocker to reach contact mechanism.

Clinching of the frame to the case well above the base and terminals provides 1,500V dielectric strength.

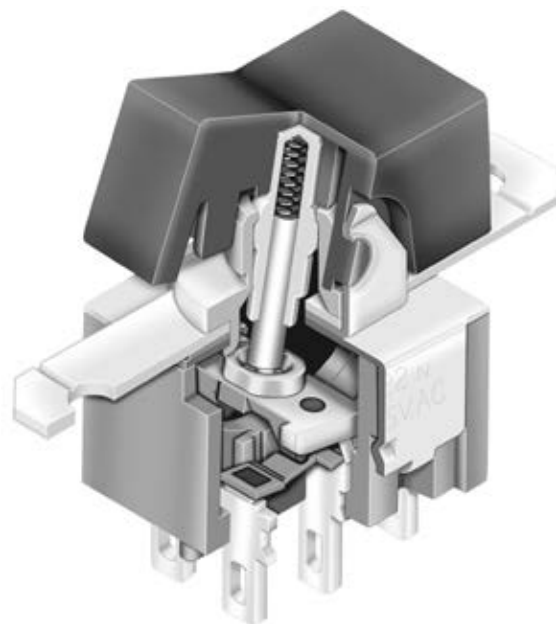


Actual Size

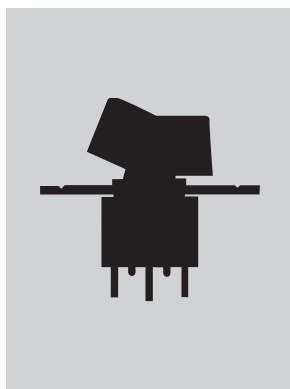


Snap-in Mount

Page B64



Bracket PC Mount

Page B72



Flat Frame Mount

Page B83

TYPICAL SWITCH

M20

1

3

TX

G

Poles

1	SPDT
2	DPDT SP3T
3	3PDT (used only with terminal codes 30 & 41 & frame code TX)
4	4PDT DP3T (used only with terminal code 41 & frame code TX)

Mounting Frames

TX	Narrow Frame for Small Actuator
TZ	Wide Frame for Large Actuator

Circuits

2	ON	NONE	ON
3	ON	OFF	ON
5	ON	NONE	(ON)
8	(ON)	OFF	(ON)
9	ON	OFF	(ON)
*4	ON	ON	ON
*6	(ON)	ON	(ON)
*7	ON	ON	(ON)

() = Momentary


* 3-ON circuits

Contact Materials & Ratings

W	Silver; Rated 6A @ 125V AC & 3A @ 250V AC
G	Gold; Rated 0.4VA max @ 28V AC/DC max
A	Gold over Silver; Rated 6A @ 125V AC & 0.4VA max @ 28V AC/DC max

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

M2013TXG41-DC

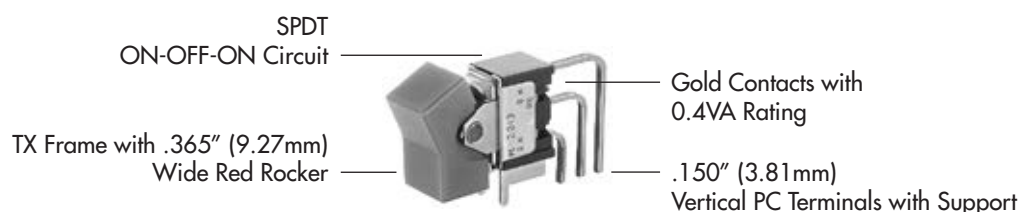

ORDERING EXAMPLE

41

Terminals For
TX & TZ Frames

Straight PC with Bracket
(1-2 Pole only)

13	.250" (6.35mm) Straight PC with .465" (11.8mm) Bracket
15	.425" (10.8mm) Straight PC with .630" (16.0mm) Bracket
17	.964" (24.5mm) Straight PC with 1.150" (29.2mm) Bracket

Straight PC with Reinforced Bracket
(1-2 Pole only)

23	.250" (6.35mm) Straight PC with .465" (11.8mm) Bracket
25	.425" (10.8mm) Straight PC with .630" (16.0mm) Bracket
26	.750" (19.05mm) Straight PC with .953" (24.2mm) Bracket

Terminals For
TX Frame Only

Right Angle PC with Support
(1-3 Pole only)

30	.150" (3.81mm) Right Angle PC
----	-------------------------------

Vertical PC with Support
(1-4 Pole)

41	.150" (3.81mm) Vertical PC
----	----------------------------

D

Rockers
& Paddles

Small Actuators
(TX Frame)

D	.365" (9.27mm) Wide Rocker
E	.365" (9.27mm) Wide Paddle
F	.450" (11.43mm) Wide Rocker
G	.450" (11.43mm) Wide Paddle

Large Actuators
(TZ Frame)

J	.595" (15.11mm) Wide Rocker
H	.595" (15.11mm) Wide Paddle

C

Rocker & Paddle
Colors

A	Black
B	White
C	Red
E	Yellow
F	Green
G	Blue
H	Gray


IMPORTANT:



Switches are supplied without UL & CSA marking unless specified.
UL & CSA recognized only when ordered with marking on the switch.
Specific models, ratings and ordering instructions are noted on the
General Specifications page.

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

M2022TZG23-JC

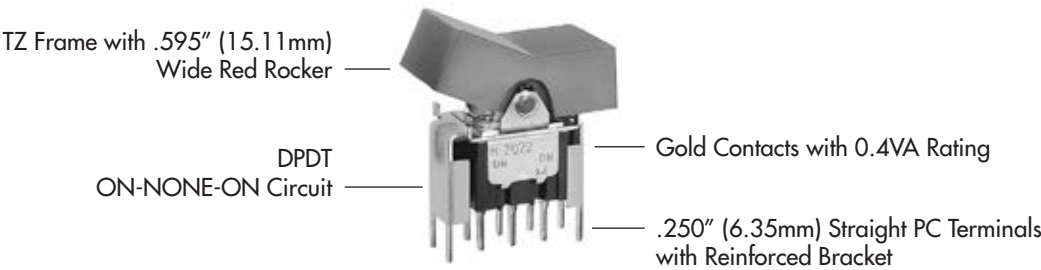

POLES & CIRCUITS

		Rocker Position () = Momentary			Connected Terminals			Throw & Schematics
Pole	Model	Down	Center	Up	Down	Center	Up	Note: Terminal numbers are not actually on the switch. * Reverse circuits available for vertical mount SP & DP upon request.
SP	M2012 M2013 *M2015 M2018 *M2019	ON ON ON (ON) ON	NONE OFF NONE OFF OFF	ON ON (ON) (ON) (ON)	2-3	OPEN	2-1	SPDT
DP	M2022 M2023 *M2025 M2028 *M2029	ON ON ON (ON) ON	NONE OFF NONE OFF OFF	ON ON (ON) (ON) (ON)	2-3 5-6	OPEN	2-1 5-4	DPDT
3P	M2022 M2023 *M2025 M2028 *M2029	ON ON ON (ON) ON	NONE OFF NONE OFF OFF	ON ON (ON) (ON) (ON)	2-3 5-6 8-9	OPEN	2-1 5-4 8-7	3PDT
4P	M2042 M2043 *M2045 M2048 *M2049	ON ON ON (ON) ON	NONE OFF NONE OFF OFF	ON ON (ON) (ON) (ON)	2-3 5-6 8-9 11-12	OPEN	2-1 5-4 8-7 11-10	4PDT


For 3 Throw (3-On)

Connected Terminals & Schematics

Pole	Model	Down	Center	Up	Down	Center	Up
SP	M2024 M2026 M2027	ON (ON) ON	ON ON ON	ON (ON) (ON)	 2-3 5-6	 2-3 5-4	 2-1 5-4
DP	M2044 M2046 M2047	ON (ON) ON	ON ON ON	ON (ON) (ON)	 2-3 5-6 8-9 11-12	 2-3 5-4 8-9 11-10	 2-1 5-4 8-7 11-10


The SP3T model utilizes a double pole base.

External connection must be made during field installation.



The DP3T model utilizes a four pole base.

External connection must be made during field installation.



MOUNTING FRAMES

Toggles

B
Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch


Indicators

Accessories


Supplement

TX Narrow Mounting Frame for Small Actuators
with Straight PC Terminals (codes 13, 15, 17, 23, 25, & 26)
or with Angle PC Terminals (codes 30 & 41)


Straight PC Mounting



Right Angle PC Mounting

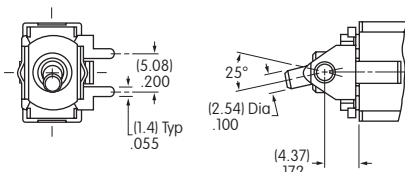




Vertical PC Mounting

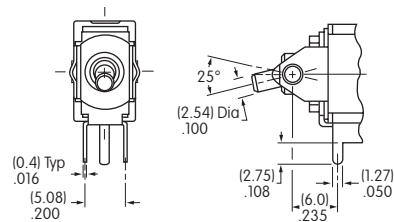

Small Actuators & Panel Cutouts for TX Frame (actuator details on the following pages)




AT4148

AT4149



AT4150

AT4151







TZ Wide Mounting Frame
for Large Actuators
with Straight PC Terminals
(codes 13, 15, 17, 23, 25, & 26)

Large Actuators & Panel Cutouts for TZ Frame
(actuator details on the following pages)

AT4156

AT4157

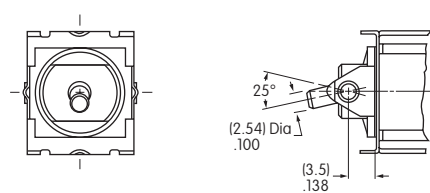

CONTACT MATERIALS & RATINGS

W Silver over Silver Power Level 6A @ 125V AC & 3A @ 250V AC

G Gold over Brass or Copper Logic Level 0.4VA maximum @ 28V AC/DC maximum

Note: See Supplement section to find complete explanation of operating range.

A Gold over Silver Power Level
or Logic Level 6A @ 125V AC
or 0.4VA maximum @ 28V AC/DC maximum

Note: This dual rated option is suitable when two or more identical switches are used in logic and in power circuits within the same application. See Supplement section to find complete explanation of dual rating and operating range.


TERMINALS

For TX and TZ 1-2 Pole
Straight PC Mount with Bracket

For TX and TZ 1-2 Pole
Straight PC Mount with Reinforced Bracket


13

.250" (6.35mm)
Terminal with
.465" (11.8mm)
Bracket




15

.425" (10.8mm)
Terminal with
.630" (16.0mm)
Bracket




17

.964" (24.5mm)
Terminal with
1.150" (29.2mm)
Bracket




23

.250" (6.35mm)
Terminal with
.465" (11.8mm)
Bracket




25

.425" (10.8mm)
Terminal with
.630" (16.0mm)
Bracket



26

.750" (19.05mm)
Terminal with
.953" (24.2mm)
Bracket




PCB footprints are on the following Typical Switch Dimension pages.

For TX 1-3 Pole Right Angle PC Mount

30


.150" (3.81mm)
Right Angle PC



For TX 1-4 Pole Vertical PC Mount

41

.150" (3.81mm)
Vertical PC





ROCKERS & PADDLES FOR TX MOUNTING FRAMES

D

AT4148 .365" (9.27mm)
Wide Rocker



Material: Polyamide
Finish: Matte



E

AT4149 .365" (9.27mm)
Wide Paddle



Material: Polyamide
Finish: Matte



F

AT4150 .450" (11.43mm)
Wide Rocker


Material: Polyamide
Finish: Matte



G

AT4151 .450" (11.43mm)
Wide Paddle

Material: Polyamide
Finish: Matte



Cap Colors
Available:

A

Black

B

White

C

Red

E

Yellow

F

Green



G

Blue

H

Gray

ROCKERS & PADDLES FOR TZ MOUNTING FRAMES

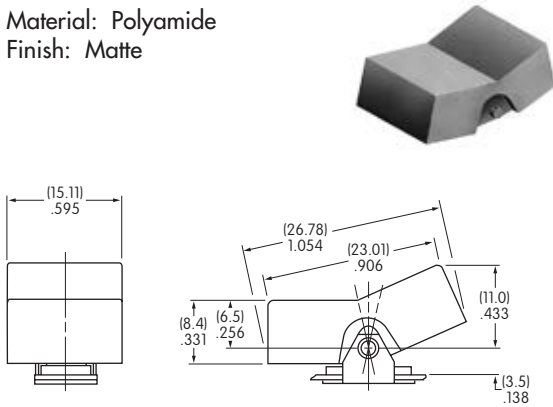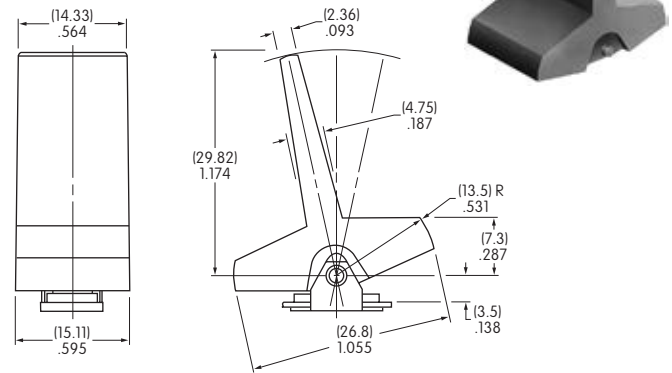J AT4156 .595" (15.11mm)
Wide RockerMaterial: Polyamide
Finish: Matte**H** AT4157 .595" (15.11mm)
Wide PaddleMaterial: Polyamide
Finish: MatteCap Colors
Available:

Black



White



Red



Yellow



Green



Blue



Gray

OPTIONAL SNAP-IN PANEL FRAMES

Used with AT4148 Rocker and AT4149 Paddle

AT064-1Accommodates .047" ~ .090"
(1.2 ~ 2.3mm) panel thicknessMaterial: Polyamide
Finish: Matte
Color: Black

Mounted separately from switches



Cutout Tolerances:

Dimension A:


.797" ~ .803" (20.24 ~ 20.4mm)

Dimension B:

.495" ~ .505" (12.57 ~ 12.83mm)

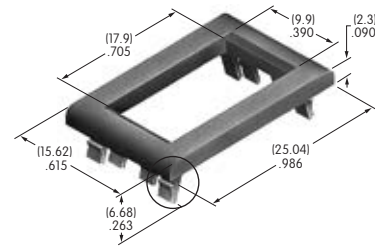**AT064-2**Accommodates .062" ~ .125"
(1.57 ~ 3.18mm) panel thickness

AT064-1 Enlarged Detail



Used with AT4150 Rocker and AT4151 Paddle

AT065-1Accommodates .047" ~ .090"
(1.2 ~ 2.3mm) panel thicknessMaterial: Polyamide
Finish: Matte
Color: Black

Mounted separately from switches




Cutout Tolerances:

Dimension A:


.595" ~ .605" (15.11 ~ 15.37mm)

Dimension B:

.495" ~ .500" (12.57 ~ 12.7mm)




AT065-1 Enlarged Detail



AT065-2 Enlarged Detail



TYPICAL SWITCH DIMENSIONS

Straight PC • Bracket

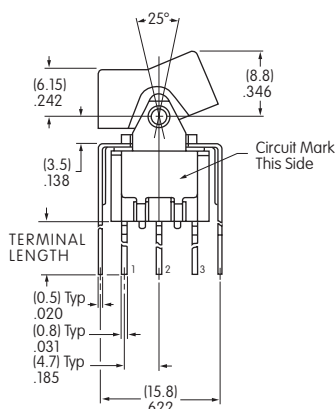


M2012TXG13-DC

Terminal Code:	Terminal Length:	Bracket Length:
13	.250" (6.35mm)	.465" (11.8mm)
15	.425" (10.8mm)	.630" (16.0mm)
17	.964" (24.5mm)	1.150" (29.2mm)

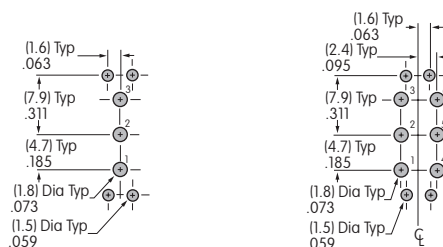
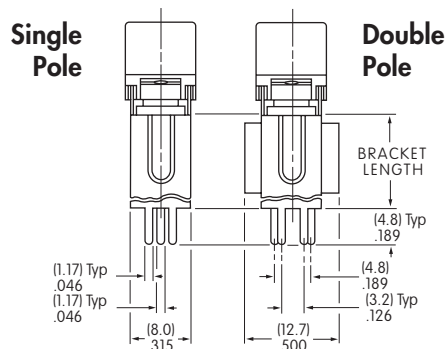


Straight PC • Reinforced Bracket

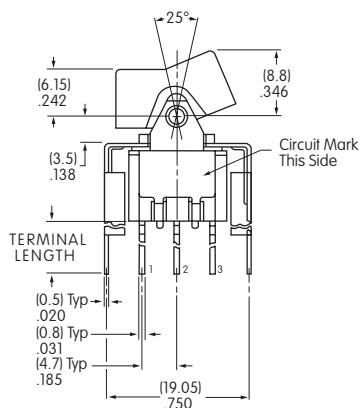

M2012TXG23-DC





Terminal Code:	Terminal Length:	Bracket Length:
23	.250" (6.35mm)	.465" (11.8mm)
25	.425" (10.8mm)	.630" (16.0mm)
26	.750" (19.05mm)	.953" (24.2mm)

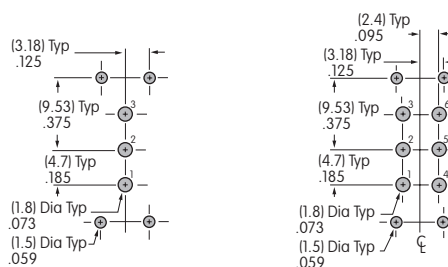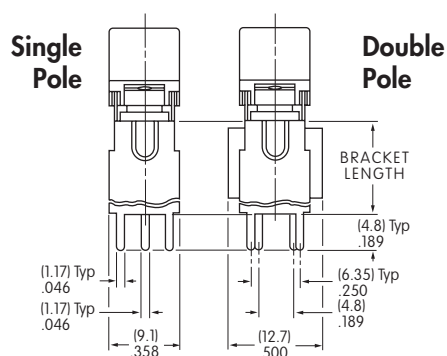

TYPICAL SWITCH DIMENSIONS

Single Pole





.150" (3.81mm) Right Angle PC



M2012TXG30-DC

Double Pole





.150" (3.81mm) Right Angle PC



M2022TXG30-DC

Three Pole

.150" (3.81mm) Right Angle PC

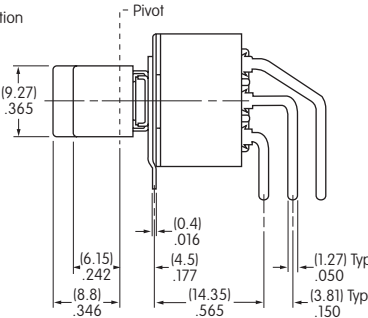


M2032TXG30-DC

TYPICAL SWITCH DIMENSIONS

.150" (3.81mm) Vertical PC


Single Pole

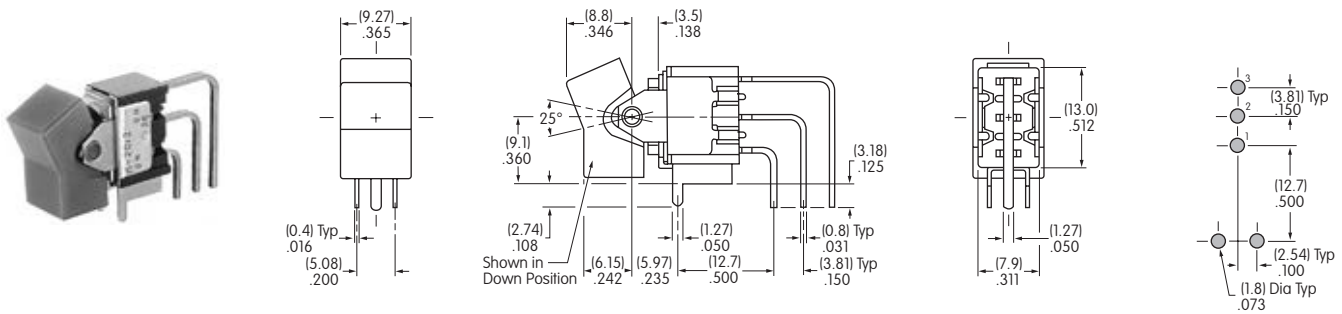

M2012TXG41-DC

.150" (3.81mm) Vertical PC


Double Pole

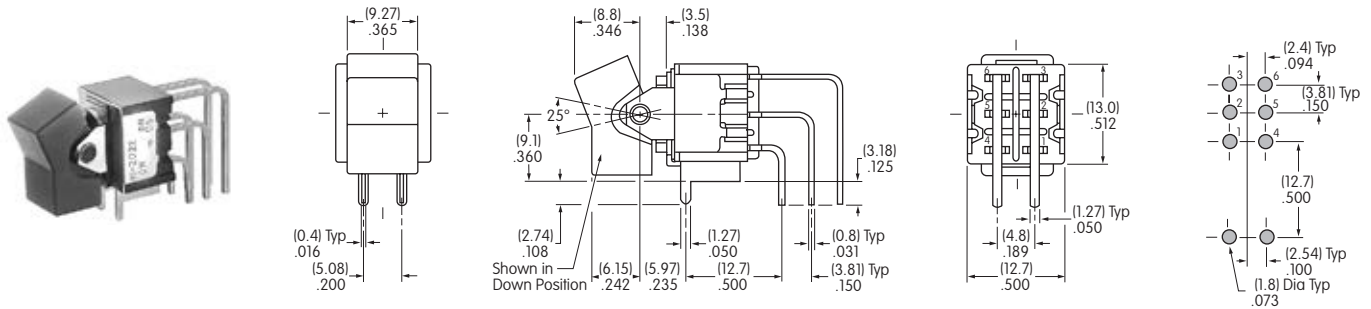

M2022TXG41-DC

.150" (3.81mm) Vertical PC


Three Pole

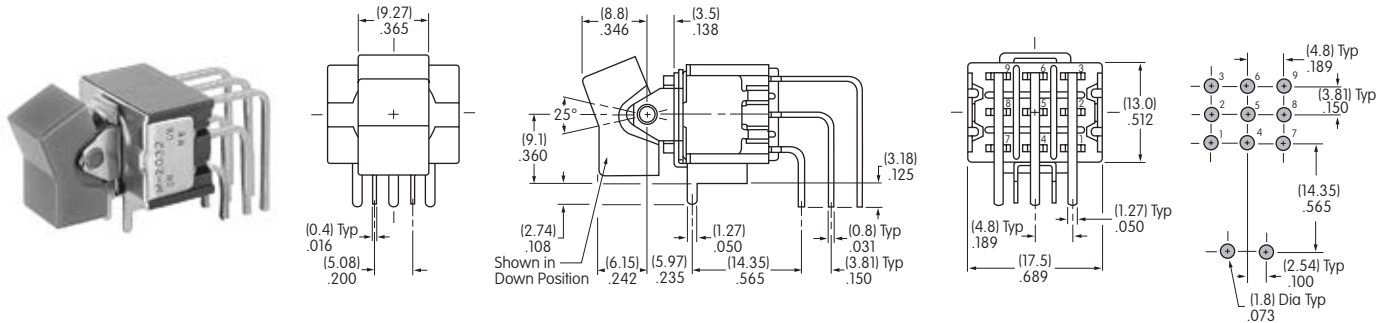

M2032TXG41-DC

.150" (3.81mm) Vertical PC

Four Pole

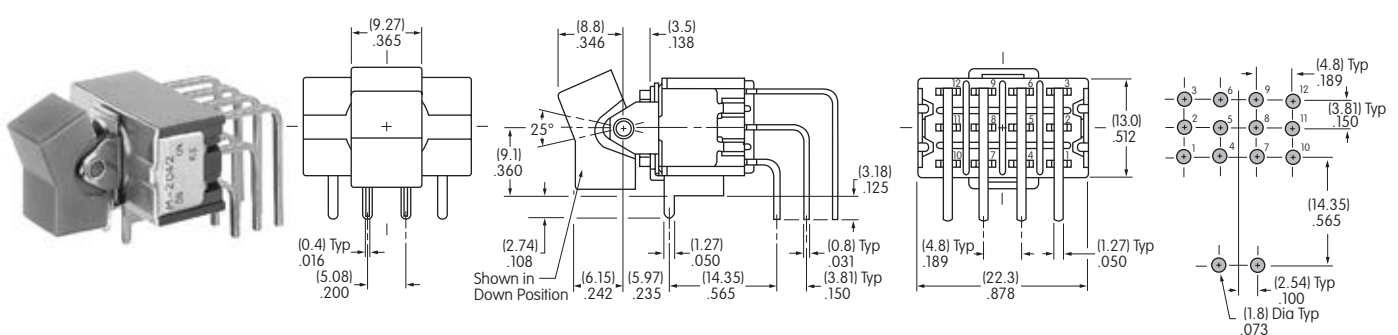

M2042TXG41-DC

TYPICAL SWITCH DIMENSIONS

Straight PC • Bracket

Toggles

B Rockers

Pushbuttons

Illuminated PB

Programmable

Keylocks

Rotaries

Slides

Tactiles


Tilt

Touch


Indicators

Accessories


Supplement

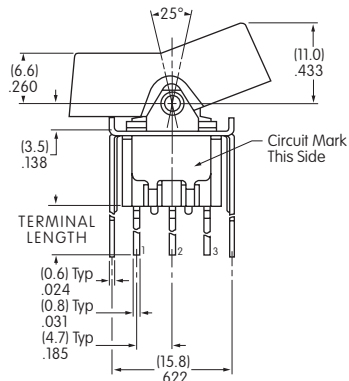



Single Pole



Double Pole




M2012TZG13-JC




Terminal Code:	Terminal Length:	Bracket Length:
13	.250" (6.35mm)	.465" (11.8mm)
15	.425" (10.8mm)	.630" (16.0mm)
17	.964" (24.5mm)	1.150" (29.2mm)


Straight PC • Reinforced Bracket

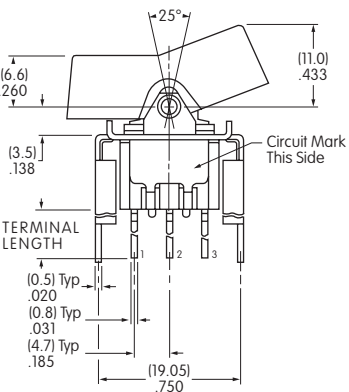



Single Pole



Double Pole



M2012TZG23-JC




Terminal Code:	Terminal Length:	Bracket Length:
23	.250" (6.35mm)	.465" (11.8mm)
25	.425" (10.8mm)	.630" (16.0mm)
26	.750" (19.05mm)	.953" (24.2mm)

LEGENDS


NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for Cap


AT4148



AT4150



AT4156



Shaded areas are printable areas.

Recommended Print Method:

Pad Print

Epoxy based ink is recommended.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NKK Switches:

[M2012TXG41-DC](#) [M2012TXG30-DC](#) [M2012TXW15-DH](#) [M2012TXW30-FA](#) [M2012TZG23-JB](#) [M2013TXG30-DA](#)
[M2018TXG13-DA](#) [M2018TXW13-EA](#) [M2019TXG30-FA](#) [M2022TXG13-DA](#) [M2022TXW13-DA](#) [M2022TXW13-FA](#)
[M2022TXW13-GA](#) [M2022TXW23/U-DB](#) [M2023TXG41-FA](#) [M2032TXW30-DA](#) [M2012TXW41-FC](#) [M2013TXG13-DC](#)
[M2015TXG23-DA](#) [M2018TXG13-DB](#) [M2018TXG13-FB](#) [M2018TXG41-EC](#) [M2018TXW13-FB](#) [M2018TXW13/UC](#)
[M2018TXW13/UC-GA](#) [M2018TZW13-JE](#) [M2019TXG13-GB](#) [M2022TXG13-DC](#) [M2022TZW13](#) [M2022TZW13-JB](#)
[M2022TZW13/UC](#) [M2023TXW13-EA](#) [M2023TXW13-FA](#) [M2024TXW13-EB](#) [M2026TXG13-GA](#) [M2028TXG13-DC](#)
[M2028TXG13-FC](#) [M2013TXW25-DA](#) [M2013TXW25-DF](#) [M2013TXW25-DC](#) [M2022TXG30-DC](#) [M2018TXW13/CUL-](#)
[GA](#) [M2022TXW23-DG](#) [M2022TXG30-DB](#) [M2029TXG41-DA](#) [M2012TZW23/U-JB](#) [M2015TZG23-JH](#) [M2022TXW41-](#)
[FA](#) [M2032TXG30-DC](#) [M2027TXG30-DA](#) [M2012TZW23/U-JC](#) [M2012TXG13-GA](#) [M2015TXG13-EB](#) [M2019TXG45-DA](#)
[M2039TXA41](#) [M2039TXA41-DA](#) [M2023TXA13-DH](#) [M2023TXG30-FA](#) [M2022TXW30-EA](#) [M2023TXW13-DH](#)
[M2012TXW13-GB](#) [M2015TXG13-GB](#) [M2029TXW30-DC](#) [M2029TXW13-DC](#) [M2028TXW13-GA](#) [M2018TXW13-EE](#)
[M2018TXW03](#) [M2012TXW30/UC/328-DA](#) [M2023TXG13-DB](#) [M2025TXW13](#) [M2013TXW41-DA](#) [M2012TXW13-DE](#)
[M2018TXW30](#) [M2022TXG13-DB](#) [M2039TXW41-DA](#) [M2012TXW45/U](#) [M2018TXG41-FA](#) [M2015TXW41](#)
[M2022TZW24](#) [M2012TXG41-FA](#) [M2018TXW26](#) [M2029TXW13-GA](#) [M2013TXW30-DA](#) [M2012TXG13-GB](#)
[M2013TXG13-FA](#) [M2015TXG23-FH](#) [M2018TXG41](#) [M2012TXG23-DB](#) [M2022TZW13-JH](#) [M2033TXW41](#)
[M2012TXW26-DA](#) [M2023TZW13-JB](#) [M2042TXA41-FA](#) [M2027TXW13-DA](#) [M2012TXG13/108-FA](#) [M2032TXW13](#)
[M2012TXW26](#) [M2032TXG30-DA](#) [M2012TXW41/CUL](#) [M2033TXW13](#)