

General Specifications

Electrical Capacity (Resistive Load)

Low/Logic Level: 50mA @ 24V DC maximum for Standard Operating Force models
125mA @ 24V DC maximum for High Operating Force models

Other Ratings

	Standard Operating Force	High Operating Force
Contact Resistance:	50 milliohms maximum	50 milliohms maximum
Insulation Resistance:	500 megohms minimum @ 250V DC	500 megohms minimum @ 250V DC
Dielectric Strength:	250V AC minimum for 1 minute minimum	250V AC minimum for 1 minute minimum
Mechanical Life:	5,000,000 operations minimum	1,000,000 operations minimum
Electrical Life:	5,000,000 operations minimum	1,000,000 operations minimum
Nominal Operating Force:	1.76N for JB15L	2.65N for JB15HL & JB15HB
Total Travel:	.010" (.254mm)	.012" (.300mm)

Materials & Finishes

Actuator:	Polyacetal for Short; Glass fiber reinforced PBT for Extended
Case:	Glass fiber reinforced polyamide (UL94V-0)
Seal:	Nitrile butadiene rubber
Base:	Glass fiber reinforced PBT (UL94V-0)
Movable Contacts:	Stainless steel
Stationary Contacts:	Brass with silver plating
Terminals:	Brass with silver plating

Environmental Data

Operating Temperature Range:	-25°C through +70°C (-13°F through +158°F)
Humidity:	90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration:	10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock:	50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

PCB Processing

Soldering:	Wave Soldering recommended. See Profile A in Supplement section. Manual Soldering: See Profile A in Supplement section.
Cleaning:	Automated cleaning. See Cleaning specifications in Supplement section.

Standards & Certifications

Flammability Standards:	UL94V-0 rated case & base The JB Series tactiles have not been tested for UL recognition or CSA certification. These switches are designed for use in a low-voltage, low-current, logic-level circuit. When used as intended in a logic-level circuit, the results do not produce hazardous energy.
-------------------------	--

Distinctive Characteristics

Choice of dimensions from PCB to top of cap adds to design flexibility.

Bright, full-face illumination with red, green, or yellow LEDs for attractive, functional panel layouts.

Higher operating force type provides more pronounced operating feel.


Dome contact gives crisp tactile feedback to positively indicate circuit transfer and assures high reliability and long life of up to 5,000,000 operations.

Rubber seal construction prevents contact contamination and allows automated soldering and cleaning.


Slanted terminals provide a spring type action which ensures secure mounting and prevents dislodging during wave soldering.

Molded-in terminals are part of the sealed construction which allows automated soldering and cleaning.

Terminal spacing conforms to standard .100" (2.54mm) PCB grid.

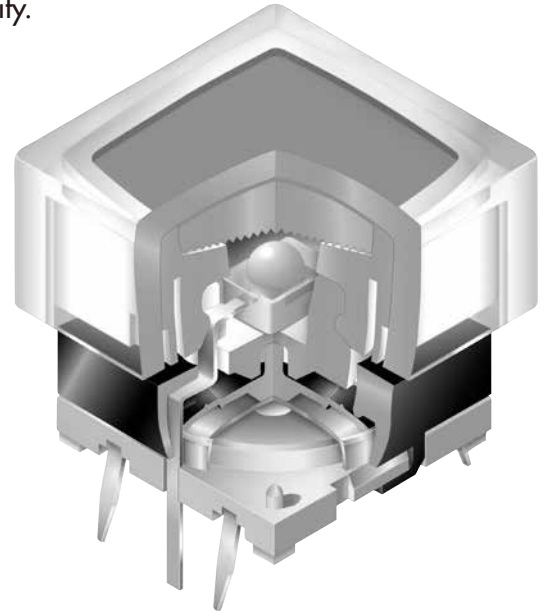


Actual Size



Common Bus Matrix

These single pole, single throw switches can be used in a key-board matrix and, using strapped terminals, achieve a common bus electrical configuration on a single-sided PC board.

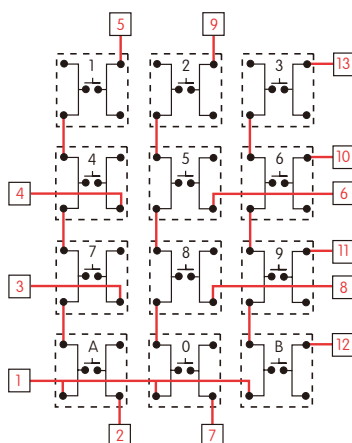


PC Terminations													
	1	2	3	4	5	6	7	8	9	10	11	12	13
Keys (Switches)	1												
2													
3													
4													
5													
6													
7													
8													
9													
0													
A													
B													

● = ON

X-Y Matrix

These single pole, single throw switches can be arranged on a single-sided PC board matrix with strapped terminals to achieve an X-Y type electrical interconnection.

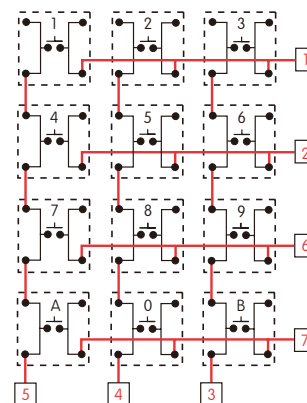

PC Terminations							
	1	2	3	4	5	6	7
Keys (Switches)	1						
2							
3							
4							
5							
6							
7							
8							
9							
0							
A							
B							

● = ON

Red = PCB Trace Black = Switch Circuit

TYPICAL SWITCH ORDERING EXAMPLE

JB

15

L

P

C

—

JC

Pole & Circuit

15	SPST	OFF	(ON)
----	------	-----	------

() = Momentary

Actuators

L	Short
B	Extended (H operating force only)

Operating Force

No Code	Standard (L actuator only)
H	High

Terminals

P	Straight PC
---	-------------

LED Colors

C	Red
E	Yellow
F	Green

Cap Types & Colors

Flat Cap Colors

B	Translucent White
C	Red
E	Yellow
F	Green

Flat Cap Lens/Diffuser Colors

JB	Clear/White
JC	Clear/Red
JE	Clear/Yellow
JF	Clear/Green


For JC, JE & JF, diffuser color must match LED color

Framed Cap Button/Frame Colors



BB	White/White
BC	White/Red
BE	White/Yellow
BF	White/Green
BH	White/Gray

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

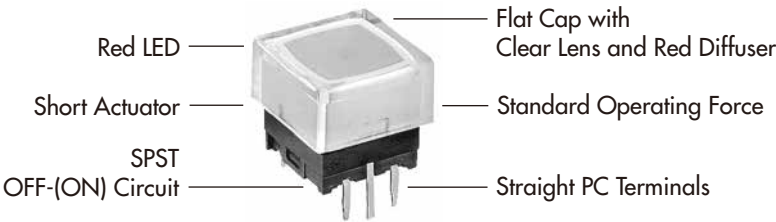JB15LPC-JC



POLE & CIRCUIT

		Actuator Position () = Momentary		Switch Throw & Schematic	LED Schematic	Notes: Terminal numbers are shown on switch. LED circuit is isolated & requires external power source.
Pole & Throw	Model	Normal	Down	<div>SPST</div> 		
SPST	JB15	OFF	(ON)			

OPERATING FORCE



Standard
Nominal Operating Force
1.76N

Available with short actuator only (code L)





High
Nominal Operating Force
2.65N

Available with both short and extended actuators


ACTUATORS




Short Actuator

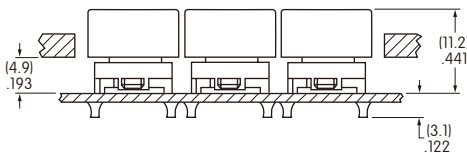


Custom keyboards can be designed with caps installed through a panel cutout (illustration with cap AT4060).




Extended Actuator



High operating force only

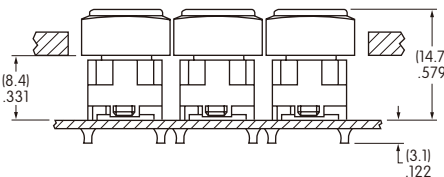

Custom keyboards can be designed with caps installed through a panel cutout (illustration with cap AT4076).





TERMINALS



Straight PC Terminals

Further details in Typical Switch Dimensions



LED COLORS & SPECIFICATIONS

LEDs are supplied as an integral part of illuminated devices and are not available separately.

LED polarity markings are on the bottom of the switch.

The electrical specifications shown here are determined at a basic temperature of 25°C.

If the source voltage exceeds the rated voltage, a ballast resistor is required.

The resistor value can be calculated by using the formula in the Supplement section.

		<div>C</div>	<div>E</div>	<div>F</div>
Color		Red	Yellow	Green
Maximum Forward Current	I_{FM}	30mA	20mA	30mA
Typical Forward Current	I_F	10mA	10mA	10mA
Forward Voltage	V_F	1.8V	2.0V	2.1V
Maximum Reverse Voltage	V_{RM}	5V	5V	5V
Current Reduction Rate Above 25°C	ΔI_F	* 0.50mA/°C	* 0.33mA/°C	* 0.50mA/°C
Ambient Temperature Range		-25°C ~ +70°C		

* Applies to temperatures above 50°C

SNAP-ON CAPS

AT4135 Flat

Cap Color Codes:



B Translucent White



E Yellow




C Red



F Green


Material: Polycarbonate

Finish: Frosted



AT4060 Flat


Lens/Diffuser
Color Codes:



Framed:

AT4076 Button with Frame

Translucent Button/Frame
Color Codes:



JB Clear/Translucent White




JC Clear/Red



JE Clear/Yellow



JF Clear/Green



BB White/White



BC White/Red




BE White/Yellow



BF White/Green



BH White/Gray



Material: Polycarbonate


Lens Finish: Glossy

Material: Polycarbonate


Button Finish: Frosted

TYPICAL SWITCH DIMENSIONS



Flat Snap-on Cap



Short Actuator




Extended Actuator




JB15LPC-JC

Spring action terminals conform to .100" (2.54mm) PCB spacing



Framed Snap-on Cap



Short Actuator



Extended Actuator



JB15HBP-BC

Spring action terminals conform to .100" (2.54mm) PCB spacing

LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for Cap, Lens, or Button

Recommended Methods:




Laser Etch, Screen Print or Pad Print

Epoxy based ink is recommended.





Laser Etch or Pad Print

Epoxy based ink is recommended.



Shaded areas are printable areas.

Suggested Printable Area for Film Insert



Shaded area is printable area.

Film Insert: Clear Polyester 7 mil maximum thickness

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NKK Switches:](#)

[JB15HBPF-1179](#) [JB15LPCC](#) [JB15LPE/909](#)