


5X7 Dot Character VFD Module

CU16025-UW6J

- ❑ 2 X 16 Characters 5mm High
- ❑ LCD Compatible Design
- ❑ Operating Temp -40°C to +85°C
- ❑ Single 5V Supply with Power Save Mode
- ❑ High Brightness Blue Green Display
- ❑ Selectable 4/8 bit M68/i80 Parallel & Serial Interface
- ❑ ASCII + Extended Character Font
- ❑ 8 User Definable Character RAM
- ❑ 4 Level Brightness Control Function

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V CMOS compatible suitable for connection to a host CPU bus which can be set to M68 or i80 series interface by a solder link on the module. Brightness control and power down functions are provided. A full data sheet is available.

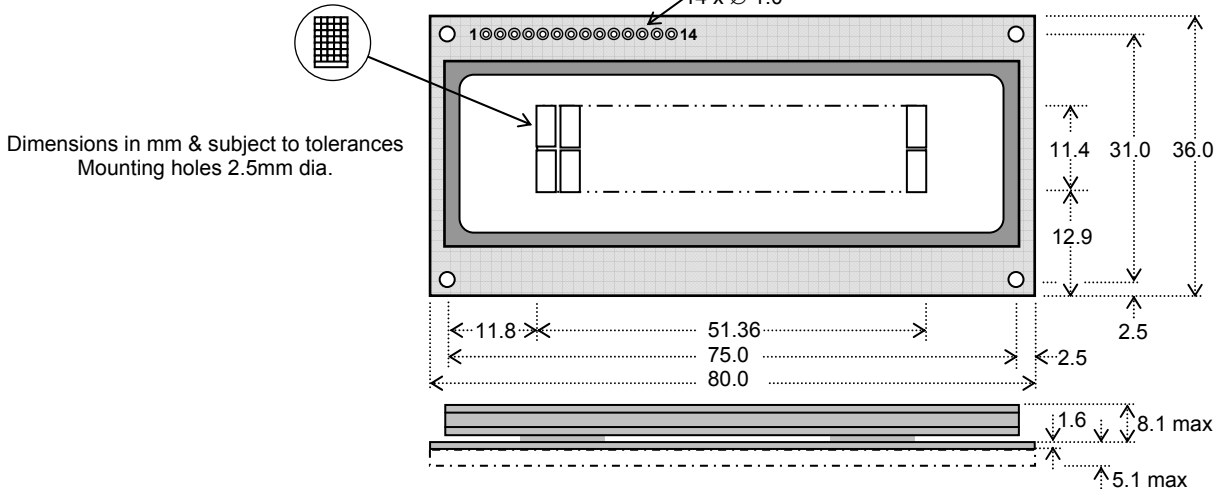

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	V _{CC}	5.0VDC +/- 5%	GND=0V
Power Supply Current	I _{CC}	150mADC typ.	V _{CC} =5V
Logic High Input	V _{IH}	2.0VDC min.	V _{CC} =5V
Logic Low Input	V _{IL}	0.8VDC max.	V _{CC} =5V
Logic High Output	V _{OH}	V _{CC} -0.8VDC min.	I _{OH} = -4mA
Logic Low Output	V _{OL}	0.6VDC max.	I _{OL} = 4mA

The power on rise time should be less than 50ms. The inrush current at power on can be 2 x I_{CC}. The I_{CC} current is 10mA maximum while in power down mode.

OPTICAL AND ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Character Size/Pitch (XxY mm)	2.275 x 4.759/3.275 x 5.991
Dot Size/Pitch (XxY mm)	0.359 x 0.577/0.479 x 0.697
Luminance	700 cd/m ² (204 fL) Typ.
Colour of Illumination	Blue-Green (Filter for more colours)
Operating Temperature	-40°C to +85°C
Storage Temperature	-50°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

SOFTWARE COMMANDS

Instruction	R/W	RS/D0-D7
Clear Display	L	L 01H
Cursor Return Home	L	L 02H-03H
Entry Mode Set	L	L 04H-07H
Display ON/OFF	L	L 08H-0FH
Cursor/Display Shift	L	L 10H-1FH
Function Set	L	L 20H-3FH
Brightness Set	L	H 00H-03H
Set CG RAM Addr.	L	L 40H-7FH
Set DD RAM Addr.	L	L 80H-E7H
Read BUSY/Addr.	H	L 00H-FFH
Write Data to RAM	L	H 00H-FFH
Read Data from RAM	H	H 00H-FFH

TIMING PARAMETERS (min)

(E)nable Cycle Time	500ns
(E)nable Pulse Width	230ns
Hold after (E)nable	10ns

PIN CONNECTIONS (CN3)

Pin	Sig	Pin	Sig
1	GND	2	V _{CC}
3	(FNC)	4	RS
5	R/W #	6	E #
7	DB0	8	DB1
9	DB2	10	DB3
11	DB4	12	DB5
13	DB6	14	DB7

PIN CONNECTIONS (CN1)

Pin	Sig	Pin	Sig
1	V _{CC}	4	STB
2	SI/SO	5	SCK
3	GND	6	NC

CHARACTER FONT

Hex	00	10	20	30	40	50	60	70	80	90	A0	B0	C0	D0	E0	F0
00																
01		!	1	A	Q	a	q	A	a	e	.	7	7	4	a	q
02		"	2	B	R	b	r	A	E	r	'	Y	X	B	E	
03		#	3	C	S	c	s	A	R	l	U	T	E	S	.	
04		\$	4	D	T	d	t	A	#	\	I	T	T	H	Q	
05		%	5	E	U	e	u	E	O	.	7	7	1	O	U	
06		&	6	F	V	f	v	O	+	7	7	2	O	P	S	
07		'	7	G	W	g	w	O	+	7	7	3	O	P	S	
08		(	8	H	X	h	x	O	l	Y	T	T	U	R	X	
09		)	9	I	Y	i	y	O	+	7	7	4	O	P	S	
0A		*	:	J	Z	j	z	O	l	Y	T	T	U	R	X	
0B		+	:	K	L	k	l	O	l	Y	T	T	U	R	X	
0C		,	<	L	#	1	l	\	2	7	7	5	O	P	S	
0D		-	=	M	I	m	>	#	l	Y	T	T	U	R	X	
0E		.	>	N	^	n	>	#	l	Y	T	T	U	R	X	
0F		/	?	O	_	o	+	E	l	Y	T	T	U	R	X	

JUMPER LINKS

Interface M68/i80

When jumper link JP2 is soldered, these inputs change to i80 series CPU control lines.

Pin 5 = /WR Pin 6 = /RD

Pin 3 (Fnc) Input

This is normally open circuit. If pads JP1.1 and JP1.2 are linked. Pin 3 = /Reset.

JP6

If JP6 is open, Parallel mode is selection. If JP6 is linked serial mode selected.

CONTACT

Noritake Sales Office Tel Nos
Nagoya Japan: +81 (0)52-561-9867
Canada: +1-416-291-2946
Chicago USA: +1-847-439-9020
Munich (D): +49 (0)89-3214-290
Itron UK: +44 (0)1493 601144
Rest Europe: +49 (0)61-0520-9220
www.noritake-itron.com

Subject to change without notice.
IUK Doc Ref: 38994 Iss:1 28Aug08

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Noritake:](#)

[CU16025-UW6J](#)