


Power Line Inductor

AIRD-06



RoHS
Compliant



21.0 x φ21.0 mm

FEATURES

- Ferrite core with UL tube
- Wire wound construction
- High current, low DCR

APPLICATIONS:

- Electronic Appliance
- Power Supplies
- TRIAC/SCR Control Circuits

STANDARD SPECIFICATIONS

Operating Temperature: -40°C ~ +125°C (including self-heat)

Storage Temperature: -40°C ~ +125°C

Part Number	Inductance	Tolerance	Q min	DCR (Max)	Saturation Current (Max)	Temperature Rise Current (Max)	Inductance Code
Units	μH	%		Ω	A	A	
Symbol	L	K, M, N		DCR	Isat	Irms	
AIRD-06-1R0	1.0	N	15	0.003	108	11.4	1R0M
AIRD-06-1R2	1.2	N	15	0.003	108	11.4	1R0M
AIRD-06-1R5	1.5	N	15	0.003	83	11.4	1R5M
AIRD-06-1R8	1.8	N	15	0.003	68	11.4	1R8M
AIRD-06-2R2	2.2	N	15	0.004	68	11.4	2R2M
AIRD-06-2R7	2.7	N	15	0.005	58	11.4	2R7M
AIRD-06-3R3	3.3	M	15	0.005	58	11.4	3R3M
AIRD-06-3R9	3.9	M	15	0.005	50	11.4	3R9M
AIRD-06-4R7	4.7	M	15	0.005	50	11.4	4R7M
AIRD-06-5R6	5.6	M	15	0.006	44	11.4	5R6M
AIRD-06-6R8	6.8	M	15	0.007	39	11.4	6R8M
AIRD-06-8R2	8.2	M	15	0.007	36	11.4	8R2M
AIRD-06-100	10	K	15	0.009	30	11.4	100K
AIRD-06-120	12	K	15	0.009	27	11.4	120K
AIRD-06-150	15	K	15	0.013	25	9.0	150K
AIRD-06-180	18	K	15	0.018	22	7.2	180K
AIRD-06-220	22	K	15	0.019	21	7.2	220K
AIRD-06-270	27	K	15	0.026	20.5	5.5	270K
AIRD-06-330	33	K	15	0.029	18.6	5.5	330K
AIRD-06-390	39	K	15	0.030	17.0	5.5	390K
AIRD-06-470	47	K	15	0.035	15.1	5.5	470K
AIRD-06-560	56	K	15	0.039	13.6	5.5	560K
AIRD-06-680	68	K	15	0.053	12.7	4.8	680K
AIRD-06-820	82	K	15	0.060	11.3	4.8	820K
AIRD-06-101	100	K	15	0.080	10.4	4.0	101K
AIRD-06-121	120	K	15	0.090	9.4	4.0	121K
AIRD-06-151	150	K	15	0.098	8.6	4.0	151K
AIRD-06-181	180	K	15	0.110	7.8	4.0	181K
AIRD-06-221	220	K	15	0.150	7.0	2.8	221K
AIRD-06-271	270	K	15	0.213	6.3	2.0	271K
AIRD-06-331	330	K	15	0.305	5.2	1.6	331K
AIRD-06-391	390	K	15	0.320	4.9	1.6	391K
AIRD-06-471	470	K	15	0.355	4.5	1.6	471K
AIRD-06-561	560	K	15	0.388	4.1	1.6	561K
AIRD-06-681	680	K	15	0.430	3.7	1.6	681K
AIRD-06-821	820	K	15	0.590	3.4	1.3	821K
AIRD-06-102	1000	K	15	0.818	3.1	1.0	102K
AIRD-06-122	1200	K	15	1.140	2.7	0.8	122K
AIRD-06-152	1500	K	15	1.260	2.4	0.8	152K
AIRD-06-182	1800	K	15	1.390	2.2	0.8	182K
AIRD-06-222	2200	K	15	1.540	2.0	0.8	222K

Test Conditions and equipments

Test frequency: 1KHz 0.25V_{RMS}

Irms: ΔT of 40°C temperature rise max



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 8-2-21


ABRACON IS
ISO9001-2015
CERTIFIED

Power Line Inductor

AIRD-06




RoHS
Compliant




21.0 x φ21.0 mm

PART NUMBER IDENTIFICATION

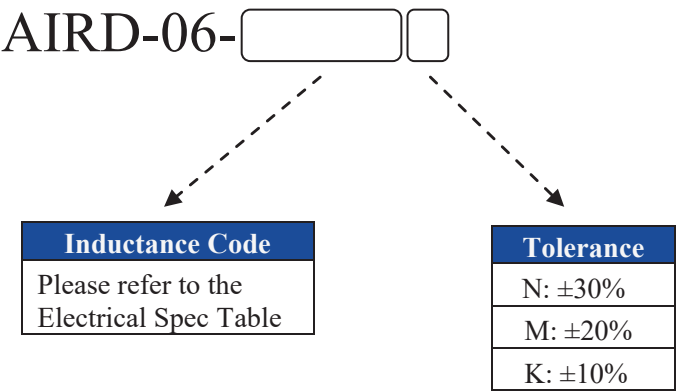

MECHANICAL DIMENSIONS

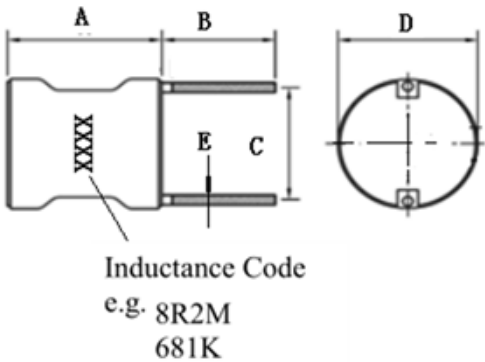

A	B	C	D	E
21.0 (max)	12.5±1	19.0±1	21.0 (max)	1.8 (max)

Dimension: inch (mm)

Packaging (50 Pcs/Box)

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[AIRD-06-100K](#) [AIRD-06-101K](#) [AIRD-06-102K](#) [AIRD-06-120K](#) [AIRD-06-121K](#) [AIRD-06-122K](#) [AIRD-06-150K](#) [AIRD-06-151K](#) [AIRD-06-152K](#) [AIRD-06-180K](#) [AIRD-06-181K](#) [AIRD-06-182K](#) [AIRD-06-220K](#) [AIRD-06-221K](#) [AIRD-06-222K](#) [AIRD-06-270K](#) [AIRD-06-271K](#) [AIRD-06-330K](#) [AIRD-06-331K](#) [AIRD-06-390K](#) [AIRD-06-391K](#) [AIRD-06-3R3M](#) [AIRD-06-3R9M](#) [AIRD-06-470K](#) [AIRD-06-471K](#) [AIRD-06-4R7M](#) [AIRD-06-560K](#) [AIRD-06-561K](#) [AIRD-06-5R6M](#) [AIRD-06-680K](#) [AIRD-06-681K](#) [AIRD-06-6R8M](#) [AIRD-06-820K](#) [AIRD-06-821K](#) [AIRD-06-8R2M](#) [AIRD-06-1R8M](#)