# 1575.42MHZ; 18.0 x 18.0 x 4.0mm GPS Patch Antenna

### APAE1575R1840AADB7-T

**RoHS/ RoHS II compliant** 



**MSL level: Not Applicable** 

### **FEATURES:**

- · High Gain
- Compact Size and Low Profile
- Pin type
- Customization Available
- RoHS Compliance

### > TYPICAL APPLICATIONS:

Automotive navigation, Marine buoys, Surveying equipment, Cell phone, Laptop, Healthcare and medical monitoring devices, PND, PDA


#### > STANDARD SPECIFICATIONS:

Parameters	Min.	Тур.	I	Max.	Units	Note
Receiving Frequency Range	1575.42±1.023				MHz	
Center Frequency @ -10dB bandwidth <sup>(*)</sup>	1583.5±3.0				MHz	(with adhesive tape on 20x20 ground plane)
-10dB Bandwidth	5.5				MHz	
VSWR				1.5		(Measured at center frequency)
Polarization Model		RHCP	•			(Right Hand Circular Polarization)
Frequency Temperature Coefficient				20	ppm/°C	


<sup>(\*)</sup> Application environment, including size of ground plane will affect stated performance. Fine tuning might be required when installed on customer's PCB.

### **TEST CONDITIONS & TEST SETUP:**

# Parts shall be measured under a condition (Temp.: 20±15°C, Humidity: 65±20% R.H.)

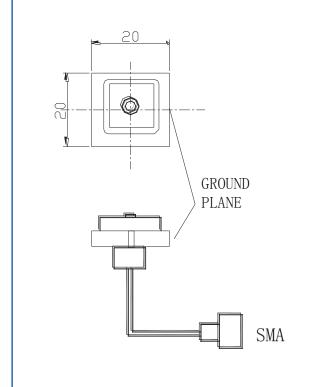

### **RADIATION PATTERN**

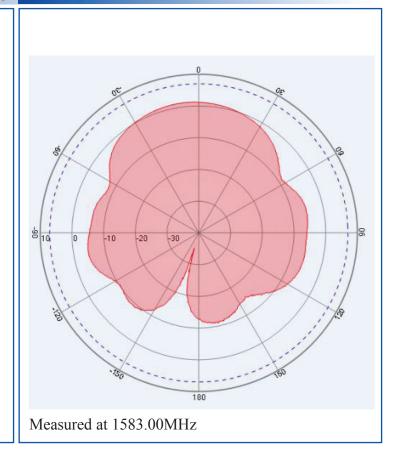






# 1575.42MHZ; 18.0 x 18.0 x 4.0mm GPS Patch Antenna

### **APAE1575R1840AADB7-T**


**RoHS/ RoHS II compliant** 



#### **► IMPEDANCE CHARACTERISTICS**

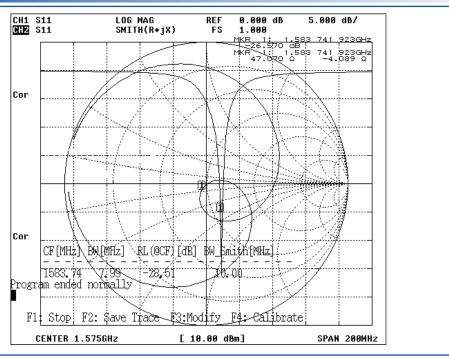

### **OUTLINE DRAWING:**

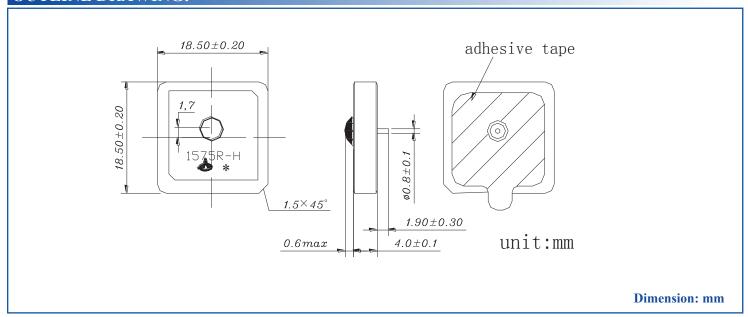



## 1575.42MHZ; 18.0 x 18.0 x 4.0mm GPS Patch Antenna

### APAE1575R1840AADB7-T

RoHS/ RoHS II compliant




### **PACKAGING:**

"T" is for a vacuum sealed tray containing 50 units.


1000 pieces is the suggested quantity containing 20-trays with 50-pcs per Tray.

NOTE: This product is vacuum packaged to reduce the possibility of oxidation and/or contamination

during storage.



1 Cushion 2 Package	
2 Package	
3 Vacuum Bag	-
4 Inner Box	
5 Label	
6 Certificate of appr	roval
7 Tray	
8 Adhesive tape	e

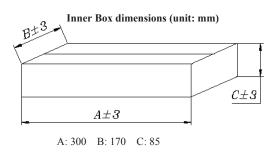

#### **CAUTION:**

- (1) Do not apply excess mechanical stress to the component body or terminations. Do not attempt to re-form or bend the components as this will cause damage to the component.
- (2) Do not expose the component to open flame.
- (3) This specification applies to the functionality of the component as a single unit. Please insure the component is thoroughly evaluated in the application circuit.

#### NOTE:

- 1) The parts are manufactured in accordance with this specification. If other conditions and specifications which are required for this specification, please contact ABRACON for more information.
- 2) ABRACON will supply the parts in accordance with this specification unless we receive a written request to modify prior to an order placement.
- 3) In no case shall ABRACON be liable for any product failure from in appropriate handling or operation of the item beyond the scope of this specification.
- 4) When changing your production process, please notify ABRACON immediately.
- 5) ABRACON Corporation's products are COTS Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. ABRACON's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from ABRACON Corporation is required. Please contact ABRACON Corporation for more information.
- 6) All specifications and Marking will be subject to change without notice.

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.





# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

**ABRACON:** 

APAE1575R1840AADB7-T