SPECIFICATIONS:							
NUMBER OF PHASES: 2	ROTOR INERTIA: 14 g-cm <sup>2</sup> ( 0.08 oz-in <sup>2</sup> ) NOM						
STEPS PER REVOLUTION: 400	DETENT TORQUE: 10 mNm (1.42 oz-in) MIN						
STEP ANGLE: 0.9°	BEARINGS: 625ZZ						
STEP TO STEP ACCURACY: ±0.045 1, 2	INSULATION CLASS: B						
POSITIONAL ACCURACY: ±5% 1,3	HYSTERESIS: N/A%						
SHAFT RUNOUT: 0.03 mm T.I.R. MAX	TEMP. RISE: 80 °C MAX.						
RADIAL PLAY: 0.02 mm MAX (.5KG RADIAL LOAD)	OPERATING TEMP. RANGE: -20 TO+50 °C						
END PLAY: 0.08 mm MAX (.5KG AXIAL LOAD)	STORAGE TEMP. RANGE: -30 TO+70 °C						
MAXIMUM RADIAL LOAD: 21N (4.72lb)	RELATIVE HUMIDITY RANGE: 15 TO 85 %						
MAXIMUM AXIAL LOAD: 10 N (2.251b)	WEIGHT: 0.16 kg (0.35 lb)						
7	1 1						

INDUCTANCE

PFR PHASE

(mH ±20%)

8

**RATED** 

CURRENT

(amp)

0.6

**HOLDING** 

TORQUE

(Nm MIN)

0.07

HOLDING

TORQUE

(oz-in Min)

9.91

ECO NO.	REV	DESCRIPTION	DATE	APPROVED
6947	Α	PRELIMINARY RELEASE	4/11/14	D.MACLEOD
7048	В	ERROR CORRECTION	8/11/14	D.MACLEOD
	_	_	_	_
-	_	_	_	_
_	_	_	_	_
_	_	_	_	_
_	_	_	_	_
_	_	_	_	_
_	_	_	_	_

5014-89

**REVISIONS** 

NOTES, UNLESS OTHERWISE SPECIFIED:

1 MEASURMENTS MADE AT RATED CURRENT IN EACH PHASE.

RESISTANCE

PFR PHASE

 $(ohm \pm 10\%)$ 

6.6

- 2 BETWEEN ANY TWO ADJACENT FULL STEP POSITIONS.
- 3 MAXIMUM ERROR IN 360°.


**SPECIFICATION** 

CONNECTION

BI-POLAR SERIES

- 4. HIPOT 500 VAC, 60 Hz FOR ONE MINUTE.
- 5. CONNECTOR: JST S11B-ZR(LF)(SN)
- 6. INSULATION RESISTANCE: 100 MEGOHMS MIN AT 500 VDC.
- 7 AS MEASURED ACROSS EACH PHASE.
- 8 AS MEASURED ACROSS EACH PHASE USING AN A.C. INDUCTANCE BRIDGE AT 1 KHz.
- AS MEASURED BY THE CHANGE IN RESISTANCE METHOD, WITH RATED CURRENT APPLIED TO 2 PHASES: WITH MOTOR AT REST.
- ADD "D" TO END OF PART NUMBER IF DOUBLE SHAFT IS REQUIRED. ENCODER HOLES INCLUDED WITH REAR SHAFT VERSION ONLY.
- 11. ROTOR & STATOR LAMINATED CONSTRUCTION.
- 12. THIS MOTOR TO BE MANUFACTURED IN COMPLIANCE WITH EU DIRECTIVE "ROHS 2002/95/EC".
- MOTOR LABEL TO INCLUDE "ROHS" COMPLIANT, AMP P/N, 'MADE IN (COUNTRY OF ORIGIN)', AND DATE CODE.


## LABEL DETAIL




## PHASE DETAIL


FULL STEP SWITCHING SEQUENCE BI-POLAR, FACING MOUNTING END


		· · · · · · · · · · · · · · · · · · ·				
	STEP	A+	A-	B+	B-	]CCW
	0	+	ı	+		≱
	1	1	+	+	1	
	2		+		+	
7	3	+			+	
CW	4	+		+		



CONTRACT NO.				W	APPLIED MOTION PRODUCTS,	INC.	
APPROVALS	DATE						
DRAWN K.KESLER	8/11/14	$\mid S$	TEH	P MO	TOR	OUTLINE	l I
CHECKED —	_		COMBI	JTER DATA	DWG NO.		REV
APPROVED —	_	l R		DRAWING DWG NO.		5014-897	В
APPROVED	_	SCALE:	NONE			SHEET 1 OF 2	

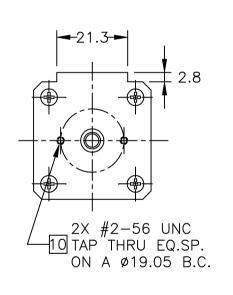

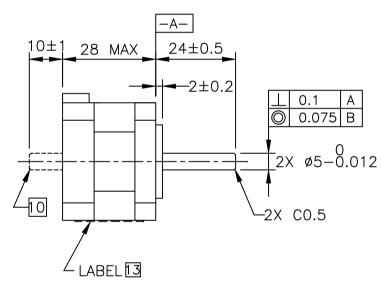

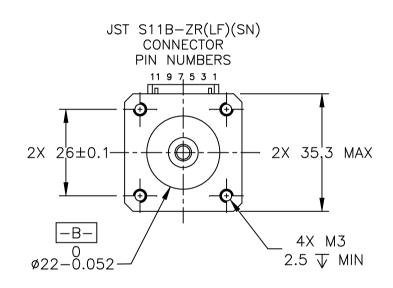

TOLERANCES	THIRD ANGLE P	ROJECTION						
*ALL DIMENSIONS IN MM DECIMALS: MM			APPLIED MOTION PRODUCTS, INC.					
$X.XX = \pm 0.13$	$\vdash$					· -	OTTOT TA	
$X.X = \pm 0.25$ ANGLES:	APPROVALS	DATE	STEP MOTOR O		OUTLIN	JUTLINE		
MACH. = ±0.5°	DRAWN K.KESLER	8/11/14						l
CHAM. = ±5°	CHECKED	-3LLN   0/11/14		DWG NO. 5014-89		^ 7	REV	
	-	_	ב	50		14-097		B
COMPUTER DATA BASE DRAWING	APPROVED	_	SCALE: 1	NONE		SHEET	Г 2 OF 2	

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Applied Motion</u>: 5014-897D 5014-897