


## Horizontal Mounting Slot/Terminal Type (Slot Width: 3 mm)

- Horizontal aperture type
- Terminal for PCB mounting




Be sure to read *Safety Precautions* on Page 3.



## Ordering Information

### Photomicrosensor

| Appearance                                                                        | Sensing method           | Connecting method         | Sensing distance                                                                                    | Aperture size (H × W) (mm)                         | Output type     | Model     | Minimum packing unit (Unit: pcs) |
|-----------------------------------------------------------------------------------|--------------------------|---------------------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------|-----------------|-----------|----------------------------------|
|  | Transmissive (slot type) | Terminal for PCB mounting |  3 mm (Slot width) | Both emitting side and detecting side<br>0.5 × 1.3 | Phototransistor | EE-SX1046 | 1                                |

**Note:** Order in multiples of minimum packing unit.

## Ratings, Characteristics and Exterior Specifications

### Absolute Maximum Ratings (Ta = 25°C)

| Item                      | Symbol           | Rated value       | Unit |
|---------------------------|------------------|-------------------|------|
| <b>Emitter</b>            |                  |                   |      |
| Forward current           | I <sub>F</sub>   | 50* <sup>1</sup>  | mA   |
| Pulse forward current     | I <sub>FP</sub>  | 1* <sup>2</sup>   | A    |
| Reverse voltage           | V <sub>R</sub>   | 4                 | V    |
| <b>Detector</b>           |                  |                   |      |
| Collector-Emitter voltage | V <sub>CEO</sub> | 30                | V    |
| Emitter-Collector voltage | V <sub>ECO</sub> | —                 | V    |
| Collector current         | I <sub>C</sub>   | 20                | mA   |
| Collector dissipation     | P <sub>C</sub>   | 100* <sup>1</sup> | mW   |
| Operating temperature     | T <sub>opr</sub> | -25 to 85         | °C   |
| Storage temperature       | T <sub>stg</sub> | -30 to 100        | °C   |
| Soldering temperature     | T <sub>sol</sub> | 260* <sup>3</sup> | °C   |

\*1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C.

\*2. Pulse width ≤ 10 μs, Repeated 100 Hz

\*3. Complete soldering within 10 seconds.

### Exterior Specifications

| Connecting method         | Weight (g) | Material      |
|---------------------------|------------|---------------|
|                           |            | Case          |
| Terminal for PCB mounting | 0.3        | Polycarbonate |

### Electrical and Optical Characteristics (Ta = 25°C)

| Item         | Symbol                               | Value                 |      |      | Unit | Condition |                                                                           |
|--------------|--------------------------------------|-----------------------|------|------|------|-----------|---------------------------------------------------------------------------|
|              |                                      | MIN.                  | TYP. | MAX. |      |           |                                                                           |
| Emitter      |                                      |                       |      |      |      |           |                                                                           |
|              | Forward voltage                      | V <sub>F</sub>        | —    | 1.2  | 1.5  | V         | I <sub>F</sub> = 30 mA                                                    |
|              | Reverse current                      | I <sub>R</sub>        | —    | 0.01 | 10   | μA        | V <sub>R</sub> = 4 V                                                      |
|              | Peak emission wavelength             | λ <sub>P</sub>        | —    | 920  | —    | nm        | I <sub>F</sub> = 20 mA                                                    |
| Detector     |                                      |                       |      |      |      |           |                                                                           |
|              | Light current                        | I <sub>L</sub>        | 1.2  | —    | 14   | mA        | I <sub>F</sub> = 20 mA,<br>V <sub>CE</sub> = 5 V                          |
|              | Dark current                         | I <sub>D</sub>        | —    | 2    | 200  | nA        | V <sub>CE</sub> = 10 V,<br>0 lx                                           |
|              | Leakage current                      | I <sub>LEAK</sub>     | —    | —    | —    | μA        | —                                                                         |
|              | Collector-Emitter saturated voltage  | V <sub>CE</sub> (sat) | —    | 0.1  | 0.4  | V         | I <sub>F</sub> = 20 mA,<br>I <sub>L</sub> = 0.1 mA                        |
|              | Peak spectral sensitivity wavelength | λ <sub>P</sub>        | —    | 850  | —    | nm        | V <sub>CE</sub> = 10 V                                                    |
| Rising time  |                                      | t <sub>r</sub>        | —    | 4    | —    | μs        | V <sub>CC</sub> = 5 V,<br>R <sub>L</sub> = 100 Ω<br>I <sub>L</sub> = 5 mA |
| Falling time |                                      | t <sub>f</sub>        | —    | 4    | —    | μs        | V <sub>CC</sub> = 5 V,<br>R <sub>L</sub> = 100 Ω<br>I <sub>L</sub> = 5 mA |

Engineering Data (Reference Value)

Fig 1. Forward Current vs. Collector Dissipation Temperature Rating

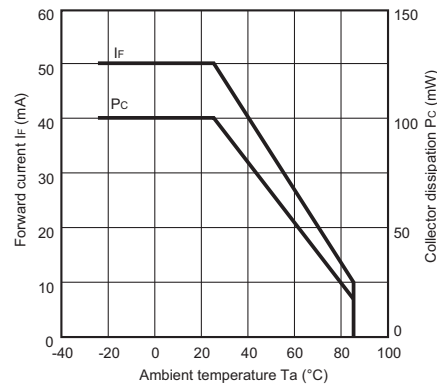


Fig 2. Forward Current vs. Forward Voltage Characteristics (Typical)

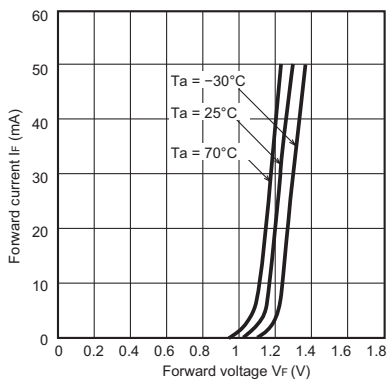


Fig 3. Light Current vs. Forward Current Characteristics (Typical)

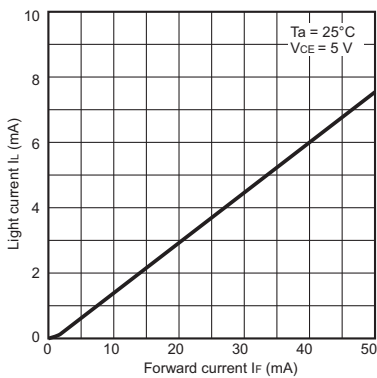


Fig 4. Light Current vs. Collector-Emitter Voltage Characteristics (Typical)

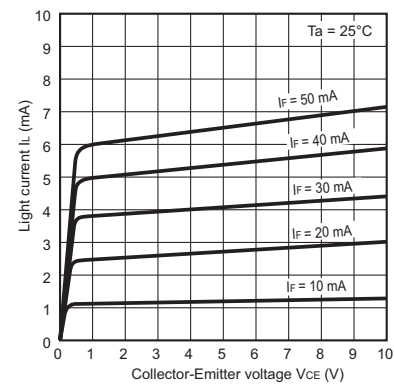


Fig 5. Relative Light Current vs. Ambient Temperature Characteristics (Typical)

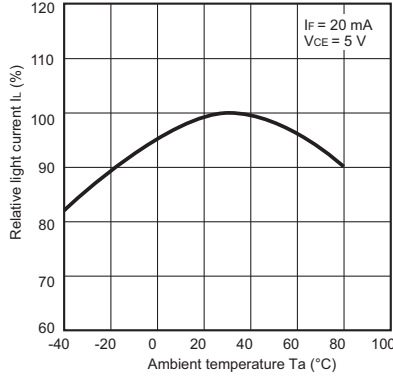


Fig 6. Dark Current vs. Ambient Temperature Characteristics (Typical)

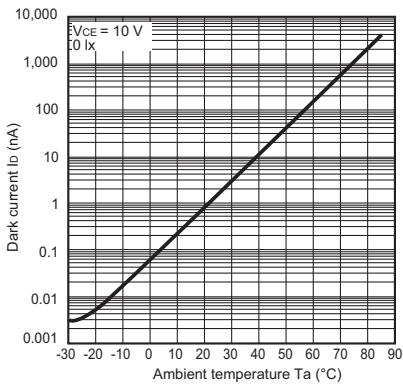


Fig 7. Response Time vs. Load Resistance Characteristics (Typical)

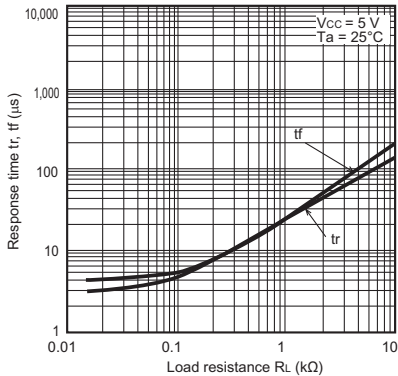


Fig 8. Sensing Position Characteristics (Typical)

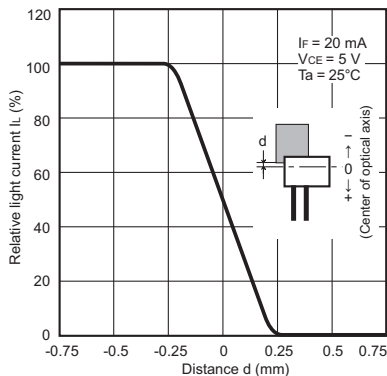


Fig 9. Sensing Position Characteristics (Typical)


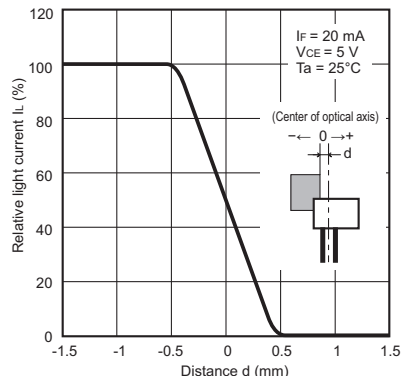


Fig 10. Response Time Measurement Circuit



Safety Precautions

To ensure safe operation, be sure to read and follow the Instruction Manual provided with the Sensor.

**CAUTION**

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



**Precautions for Correct Use**

Do not use the product in atmospheres or environments that exceed product ratings.

**Precautions for Safe Use**

**Do not use the product with a voltage or current that exceeds the rated range.**

Applying a voltage or current that is higher than the rated range may result in explosion or fire.

**Do not miswire such as the polarity of the power supply voltage.**

Otherwise the product may be damaged or it may burn.

**This product does not resist water. Do not use the product in places where water or oil may be sprayed onto the product.**

Dimensions and Internal Circuit

(Unit: mm)






Photomicrosensor

EE-SX1046



Aperture size (H × W)

| Emitter   | Detector  |
|-----------|-----------|
| 0.5 × 1.3 | 0.5 × 1.3 |



| Terminal No. | Name      |
|--------------|-----------|
| A            | Anode     |
| K            | Cathode   |
| C            | Collector |
| E            | Emitter   |

Unless otherwise specified, the tolerances are as shown below.

| Dimensions   | Tolerance |
|--------------|-----------|
| 3 mm max.    | ±0.3      |
| 3 < mm ≤ 6   | ±0.375    |
| 6 < mm ≤ 10  | ±0.45     |
| 10 < mm ≤ 18 | ±0.55     |
| 18 < mm ≤ 30 | ±0.65     |

Please check each region's Terms & Conditions by region website.

---

## OMRON Corporation

Device & Module Solutions Company

### Regional Contact

#### Americas

<https://components.omron.com/us>

#### Asia-Pacific

<https://components.omron.com/ap>

#### Korea

<https://components.omron.com/kr>

#### Europe

<https://components.omron.com/eu>

#### China

<https://components.omron.com.cn>

#### Japan

<https://components.omron.com/jp>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron:](#)

[EE-SX1046](#)