


# G3VM-201G2

MOS FET Relays

## Ultrasensitive MOS FET Relays in 200-V Load series for electric power saving.

- Continuous load current of 200 mA.

RoHS compliant


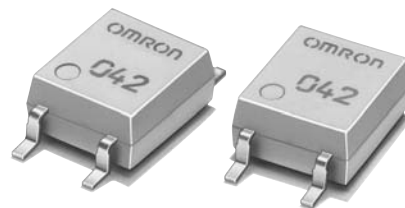


Note: The actual product is marked differently from the image shown here.

### Application Examples

- Communication equipment
- Test & Measurement equipment
- Security equipment
- Amusement equipment
- Industrial equipment
- Various battery-driven devices

### Terminal Arrangement/Internal Connections



Note: The actual product is marked differently from the image shown here.  
\* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

### List of Models

Package type	Contact form	Terminals	Load voltage (peak value) *	Model	Minimum package quantity	
					Number per tube	Number per tape and reel
SOP4	1a (SPST-NO)	Surface-mounting Terminals	200 V	G3VM-201G2	100	-
				G3VM-201G2 (TR)	-	2,500

\* The AC peak and DC value are given for the load voltage.

### Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	IF	30	mA
	Repetitive peak LED forward current	IFP	1	A
	LED forward current reduction rate	$\Delta I_F / ^\circ\text{C}$	-0.3	mA/°C
	LED reverse voltage	VR	5	V
Output	Connection temperature	TJ	125	°C
	Load voltage (AC peak/DC)	VOFF	200	V
	Continuous load current (AC peak/DC)	IO	200	mA
	ON current reduction rate	$\Delta I_O / ^\circ\text{C}$	-2.0	mA/°C
	Pulse ON current	IOP	0.6	A
	Connection temperature	TJ	125	°C
	Dielectric strength between I/O (See note 1.)	VI-O	1500	Vrms
	Ambient operating temperature	Ta	-40 to +85	°C
Soldering temperature	Ambient storage temperature	Tstg	-55 to +125	°C
	Soldering temperature	-	260	°C

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

### Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	VF	1.1	1.27	1.4	V
	Reverse current	IR	-	10	μA	VR = 5 V
	Capacity between terminals	CT	-	30	pF	V = 0, f = 1 MHz
	Trigger LED forward current	IFT	-	0.2	mA	IO = 200 mA
Output	Turn-OFF LED forward current	IFC	0.1	-	mA	IOFF = 100 μA
	Maximum resistance with output ON	RON	-	5	Ω	IF = 0.5 mA, IO = 200 mA, t < 1 s
	Current leakage when the relay is open	ILEAK	-	1	nA	VOFF = 200 V
	Capacity between terminals	Coff	-	90	pF	V = 0, f = 1 MHz
	Capacity between I/O terminals	CI-O	-	0.8	pF	f = 1 MHz, VS = 0 V
	Insulation resistance between I/O terminals	RI-O	1000	10 <sup>8</sup>	MΩ	VI-O = 500 VDC, RoH ≤ 60 %
	Turn-ON time	TON	-	3.5	ms	IF = 0.5 mA, RL = 200 Ω, VDD = 20 V (See note 2.)
	Turn-OFF time	TOFF	-	1	ms	

Note: 2. Turn-ON and Turn-OFF Times




### Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	$V_{DD}$	-	-	160	V
Operating LED forward current	$I_F$	-	0.5	25	mA
Continuous load current (AC peak/DC)	$I_O$	-	-	160	mA
Ambient operating temperature	$T_a$	-20	-	65	°C

### Engineering Data


LED forward current vs. Ambient temperature

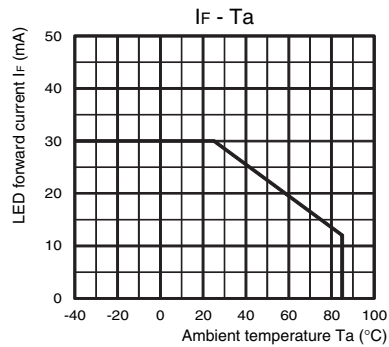


Continuous load current vs. Ambient temperature

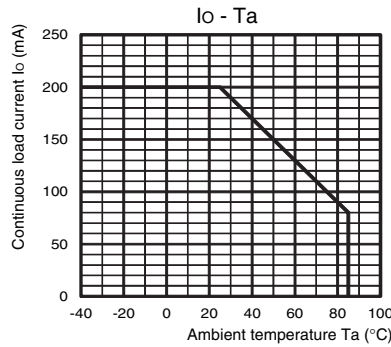


LED forward current vs. LED forward voltage

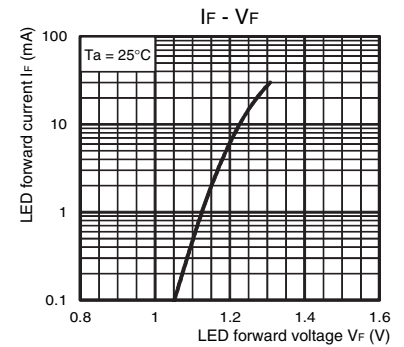


Continuous load current vs. On-state voltage

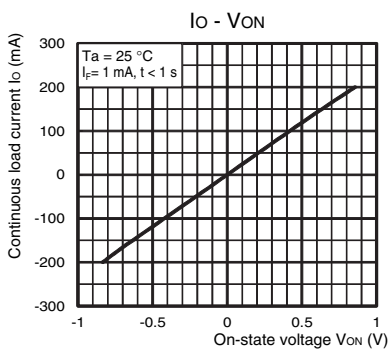


On-state resistance vs. Ambient temperature

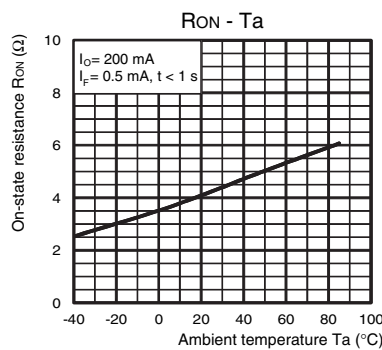


Trigger LED forward current vs. Ambient temperature

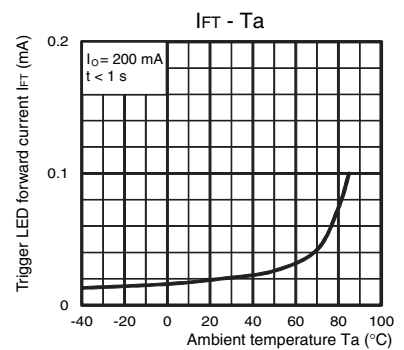


Turn ON, Turn OFF time vs. LED forward current

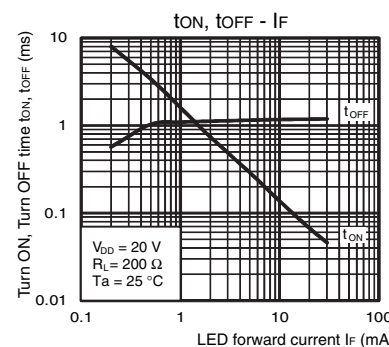


Turn ON, Turn OFF time vs. Ambient temperature

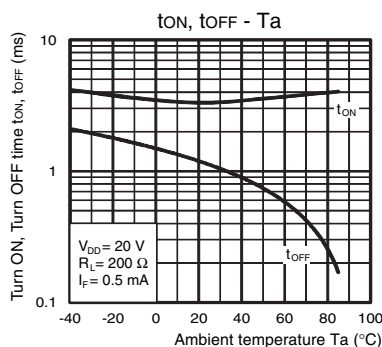

Current leakage vs. Ambient temperature

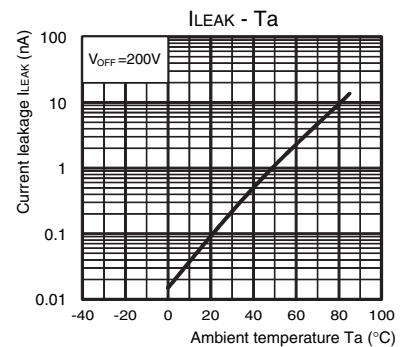

Current leakage vs. Load voltage

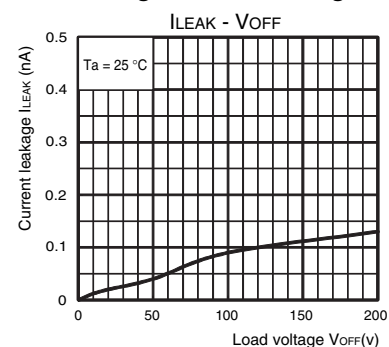


### Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

## ■ Appearance

### SOP (Small Outline Package) SOP4



Note: The actual product is marked differently from the image shown here.

\* The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.


## ■ Dimensions

(Unit: mm)




### Surface-mounting Terminals

Weight: 0.1 g

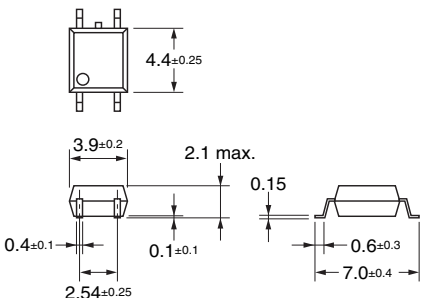

### Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron:](#)

[G3VM-201G2](#) [G3VM-201G2\(TR\)](#)