
D2S Subminiature Basic Switch


Subminiature Switch with Superb Flux Resistance

- One-piece terminal construction to keep out flux.
- High operating-position accuracy (±0.25 mm) enables easy peripheral design and positioning. Use of pin plunger also allows horizontal operation.

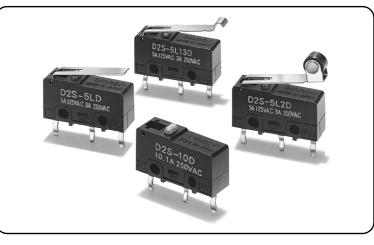

RoHS Compliant

Model Number Legend

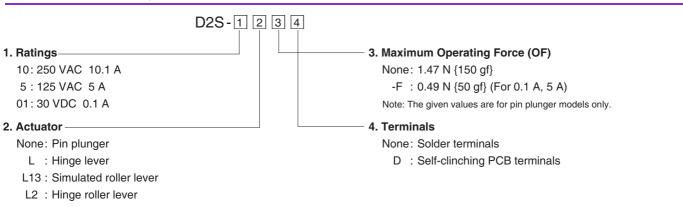

List of Models

		Ratings	10.1 A	5 A	0.1 A
Actuator	Terminals	OF max.	10.1 A	5 A	0.1 A
	Solder terminals	1.47 N {150 gf}	D2S-10	D2S-5	D2S-01
Pin plunger		0.49 N {50 gf}	-	D2S-5-F	D2S-01-F
	Self-clinching PCB	1.47 N {150 gf}	D2S-10D	D2S-5D	D2S-01D
	terminals	0.49 N {50 gf}	-	D2S-5-FD	D2S-01-FD
Hinge lever	Solder terminals	0.49 N {50 gf}	D2S-10L	D2S-5L	D2S-01L
		0.18 N {18 gf}	-	D2S-5L-F	D2S-01L-F
	Self-clinching PCB terminals	0.49 N {50 gf}	D2S-10LD	D2S-5LD	D2S-01LD
		0.18 N {18 gf}	-	D2S-5L-FD	D2S-01L-FD
Simulated roller lever	Solder terminals	0.49 N {50 gf}	D2S-10L13	D2S-5L13	D2S-01L13
\sim		0.18 N {18 gf}	-	D2S-5L13-F	D2S-01L13-F
	Self-clinching PCB terminals	0.49 N {50 gf}	D2S-10L13D	D2S-5L13D	D2S-01L13D
		0.18 N {18 gf}	-	D2S-5L13-FD	D2S-01L13-FD
Hinge roller lever	Solder terminals	0.49 N {50 gf}	D2S-10L2	D2S-5L2	D2S-01L2
ଭ	Soluei terminais	0.18 N {18 gf}	-	D2S-5L2-F	D2S-01L2-F
S.	Self-clinching PCB terminals	0.49 N {50 gf}	D2S-10L2D	D2S-5L2D	D2S-01L2D
		0.18 N {18 gf}	-	D2S-5L2-FD	D2S-01L2-FD

Separator (Sold Separately), Terminal Connector (Sold Separately) = Refer to "Basic Switch Common Accessories"

Contact Form

●SPDT



Contact Specifications

Item Model		D2S-10 models D2S-5 model		D2S-01 models		
Contact Specification Material		Riv	Crossbar			
		Silver	Gold alloy			
	Gap (standard value)	0.5 mm				
Inrush	NC	20A max.		1 A max.		
current	NO	15 A max.	10 A max.	1 A max.		
Minimum applicable load (reference value) *		5 VDC	160 mA	5 VDC 1 mA		

Please refer to "Using Micro Loads" of "OPrecautions" for more information on the minimum applicable load.

Ratings

Model	Item Rated voltage	Resistive load
D2S-10 models	250 VAC	10.1 A
D2S-5 models	125 VAC 250 VAC	5 A 3 A
D2S-01	125 VAC	0.1 A
models	30 VDC	0.1 A

Note. The above rating values apply under the

following test conditions. (1) Ambient temperature: 20±2°C

(2) Ambient humidity: 65±5%

(3) Operating frequency: 30 operations/min

Approved Safety Standards

The items shown in the "List of Models" are not standard approved models. Consult your OMRON sales

representative for specific models with standard approvals.

UL (UL1054)/CSA(CSA C22.2 No.55)

Rated voltage	Model	D2S-10	D2S-5	D2S-01
125 VAC 250 V		- 10.1 A	5 A 3 A	0.1 A -
30 VDC		-	-	0.1 A

Characteristics

Item		Model	D2S-10 models	D2S-5 models	D2S-01 models
Permissible operating speed		0.1 mm to 1 m/s (for pin plunger models)			
Permissible	Weenanda		400 operations/min		
operating frequency Electrical			60 operations/min		
Insulation resistance			100 M Ω min. (at 500 VDC with insulation tester)		
		OF 1.47 N models	30mΩ max	$30m\Omega$ max.	
		OF 0.49 N models	-	50 m Ω max.	100 mΩ max.
Between term polarity		als of the same	1,000 VAC 50/60 Hz 1 min		
Dielectric strength * 1	Between current-carrying metal parts and ground		1,500 VAC 50/60 Hz 1 min		
	Between each terminals and non-current-carrying metal parts		1,500 VAC 50/60 Hz 1 min		
Vibration resistance * 2	Malfunction		10 to 55 Hz, 1.5 mm double amplitude		
	Durability	OF 1.47 N models	1,000 m/s ² {approx. 100G} max.		
Shock		OF 0.49 N models	500 m/s ² {approx. 50G} max.		
resistance	Malfunction * 2	OF 1.47 N models	300 m/s² {approx. 30G} max.		
		OF 0.49 models	200 m/s² {approx. 20G} max.		
Durability * 3	Mechanical		10,000,000 operations min. (60 operations/min)	, ,	perations min. tions/min)
	Electrical		50,000 operations min. (30 operations/min)	200,000 operations min. (30 operations/min)	
Degree of protection		IEC IP40			
Ambient operating temperature		-25°C to +85°C (at ambient humidity of 60% max.) (with no icing or condensation)			
Ambient operating humidity			85% max. (for +5°C to +35°C)		
Weight			Approx. 1.6 g (pin plunger models)		

Note. The data given above are initial values.

- *1. The values for dielectric strength shown are for models with a Separator (refer to "Micro Switch Common Accessories").
- *2. The values are at Free Position and Total Travel Position values for pin plunger, and Total Travel Position value for lever.


Close or open circuit of the contact is 1ms max.


*3. For testing conditions, consult your OMRON sales representative.

Mounting Holes (Unit: mm)

Terminals/Appearances (Unit: mm)

Solder terminals



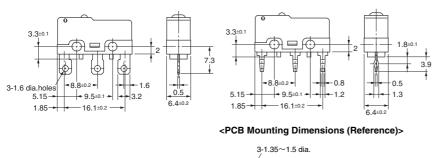






Dimensions (Unit: mm) and Operating Characteristics

The following figures show models with self-clinching PCB terminals. For the solder terminals, refer to "Terminals/Appearances".

8.8±0.2 16.1±0.2

PCB's thickness t=1.6mm


The 🗌 is replaced with the code for the terminal that you need. See the "List of Models" for available combinations of models.

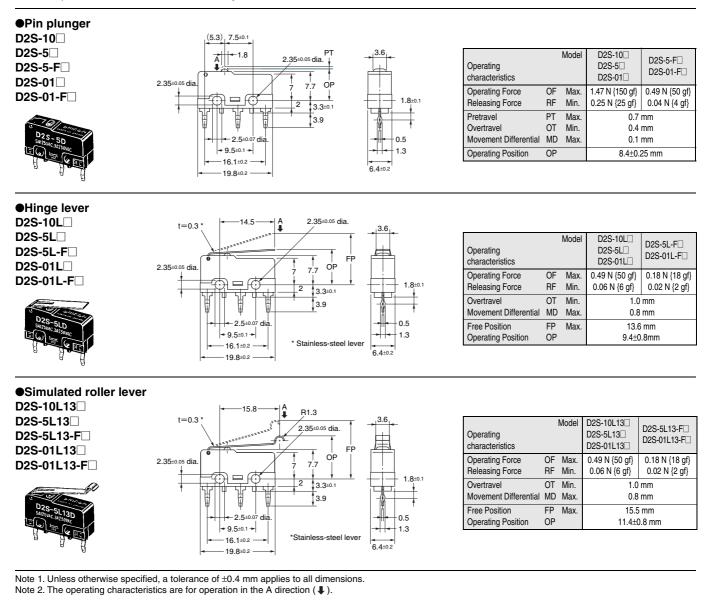

D2S-10L2 D2S-5L2

D2S-5L2-F D2S-01L2

D 2 S

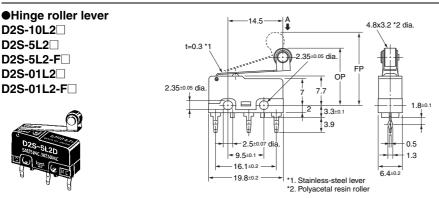

Operating characteristics		Model	D2S-10L2 D2S-5L2 D2S-01L2	D2S-5L2-F D2S-01L2-F
	OF RF	Max. Min.	0.49 N {50 gf} 0.06 N {6 gf}	0.18 N {18 gf} 0.02 N {2 gf}
Overtravel OT Min. Movement Differential MD Max.			1.0 mm 0.8 mm	
Free Position FP Max Operating Position OP		Max.	19.3 mm 15.1±0.8 mm	

Note 1. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions. Note 2. The operating characteristics are for operation in the A direction (\$).

Precautions

★ Please refer to "Basic Switches Common Precautions" for correct use.

Cautions

Soldering

When using automatic soldering baths, we recommend soldering at 260±5°C within 5 seconds. Make sure that the liquid surface of the solder does not flow over the edge of the board.

When soldering terminals manually, complete the soldering at the iron tip temperature between 350 to 400°C within 3 seconds, and do not apply any external force for 1 minute after soldering. When applying solder, keep the solder away from the case of the Switch and do not allow solder or flux to flow into the case.

Correct Use

Mounting


Use M2.3 mounting screw with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.23 to 0.26 N·m {2.3 to 2.7 kgf·cm}.

•Using Micro Loads

Using a model for ordinary loads to open or close the contact of a micro load circuit may result in faulty contact. Use models that operate in the following range. However, even when using micro load models within the following operating range, if inrush current occurs when the contact is opened or closed, it may increase the contact wear and so decrease durability. Therefore, insert a contact protection circuit where necessary. The N-level reference value applies for the minimum applicable load. This value indicates the malfunction reference level for the reliability level of 60% (λ60).

(JIS C5003)

The equation, $\lambda_{60}=0.5\times10^{-6}$ /operations indicates that the estimated malfunction rate is less than $\frac{1}{2,000,000}$ operations with a reliability level of 60%.



Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. B092-E1-06 1014(0207)(O)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

 D2S-5L13-F
 D2S-01-FD
 D2S-5L13-FD
 D2S-5L2D
 D2S-01L13D
 D2S-01L13-F
 D2S-5
 D2S-01D
 D2S-01D<