

# MicroHAWK F430-F

## Smart Camera








### World's smallest fully-integrated vision system.

- Simple configuration with AutoVISION.
- 5 megapixel sensor available.
- Autofocus available.
- Alternate LED configuration available.
- Smallest in class.
- IP65 / IP67.
- Ethernet TCP/IP, EtherNet/IP, PROFINET.



## MicroHAWK F430-F

### Mounting Options

Appearance	Type	Part Number
	L Bracket Adjustable Angle Mounting Kit	V430-AM0
	1/4-20 Camera Mounting Block Kit	V430-AM1
	4" (102 mm) Ram Mount Stand	V430-AM2
	APG Pan and Tilt Camera Mount	V430-AM3
	Nylon Screw and Washer Electrical Isolation Mounting Kit	V430-AM4
	MS-4 / MINI to V/F4XX-F Adapter Plate	V430-AM5
	Smart Ring Light to V/F4XX-F Mounting Bracket	V430-AM6
	QX / Vision HAWK to V/F4XX-F Adapter Plate	V430-AM7





## Optics Options

Appearance	Type	Part Number
	Front Window - Installation Kit	V430-AF10 *
	Diffuser – Installation Kit	V430-AF11 *
	Polarizer – Installation Kit	V430-AF12 *
	Right Angle Mirror - Installation Kit	V430-AF3
	YAG Filter - Installation Kit	V430-AF4
	ESD-Safe Window - Installation Kit	V430-AF5
	Red Filter - Installation Kit	V430-AF6
	Blue Filter - Installation Kit	V430-AF7

\* **Note:** V430-AF10, AF11, and AF12 are used for **MicroHAWK V/F4X0-FXXXXXXX-XXX** cameras in this datasheet. The prior generation **MicroHAWK V430-FXXXXXXX** code reader uses part numbers V430-AF0, AF1, and AF2. Please select the correct accessory from the table based on your camera part number format.

Accessory	Prior V430-FXXXXXXX Code Reader	New V/F4X0-FXXXXXXX-XXX Code Reader and Smart Camera
Front Window Installation Kit	V430-AF0	V430-AF10
Diffuser Installation Kit	V430-AF1	V430-AF11
Polarizer Installation Kit	V430-AF2	V430-AF12


## Additional Optics Options

Product	Appearance	Type	Part Number
<b>V430-F Window Kits</b>  		Front Window Installation Kit	V430-AF0R
		Diffuser Installation Kit	V430-AF1R
		Polarizer Installation Kit	V430-AF2R


## Lighting Options


Product	Appearance	Type	Part Number
<b>V430-F Ring Light Kits</b> 		Red Ring Light - Installation Kit	<b>V430-ALRR</b>
		White Ring Light - Installation Kit	<b>V430-ALWR</b>
		Blue Ring Light - Installation Kit	<b>V430-ALBR</b>
		IR Ring Light - Installation Kit	<b>V430-ALIR</b>




## Additional Lighting Options

Appearance	Type	Part Number
	Red Light - Installation Kit	<b>V430-ALR</b>
	White Light - Installation Kit	<b>V430-ALW</b>
	Blue Light - Installation Kit	<b>V430-ALB</b>
	IR Light - Installation Kit	<b>V430-ALI</b>

## Wiring Options



Drawing Reference	Appearance	Category	Length / Spec	Part Number
<b>2</b>		Ethernet Communication Cables - Straight Connectors	1 Meter	<b>V430-WE-1M</b>
			3 Meters	<b>V430-WE-3M</b>
		M12 Plug on Camera to RJ45 connector	5 Meters	<b>V430-WE-5M</b>
		Ethernet Comm. Cable - Right Angle M12 Connectors*	3 Meters - Right Angle Up*	<b>V430-WELU-3M</b>
		M12 Plug on Camera to RJ45	3 Meters - Right Angle Down*	<b>V430-WELD-3M</b>
<b>3</b>		Camera to QX-1 Interconnect Cables M12 Socket to M12 Plug	1 Meter	<b>V430-WQ-1M</b>
		QX-1 is used as breakout Module for common IO signals and power.		
		M12 Socket to M12 Plug, with Power Filter	300 mm	<b>V430-WQF-1M</b>
		Camera to QX-1 Interconnect Cables M12 Socket to M12 Plug	3 Meters	<b>V430-WQ-3M</b>
		QX-1 is used as breakout Module for common IO signals and power.	5 Meters	<b>V430-WQ-5M</b>
<b>4</b>		QX-1 Interconnect Module – Power, Trigger, Smart Light Control Breakout		<b>98-000103-02</b>
<b>5</b>		QX-1 Photo Sensor, M12 4-Pin Plug, NPN	2 Meter - Light ON/Dark ON	<b>99-9000016-01</b>
		QX-1 Field-Wireable M12 4-Pin Plug for any trigger source or photo sensor	Screw Terminals	<b>98-9000239-01</b>


Drawing Reference	Appearance	Category	Length / Spec	Part Number
6		Power Supply, 100-240VAC, +24VDC, M12 12-Pin Socket	1 Meter US/Euro Plug	97-000012-01
7		QX-1 M12 to Smart Light Power and Strobe Control Cables M12 Plug on QX-1 to 5 Pin Socket on light	3 Meter - Continuous Power	61-000204-01
			3 Meter - Strobe Control	61-000218-01
8		Omron Microscan Smart Light Series	Integrated Power and Strobe Control Module	See Omron Microscan Smart Light Offering - Ring, DOAL, Large Area Lighting

\* Right angle cables.


Right angle up



Right angle down

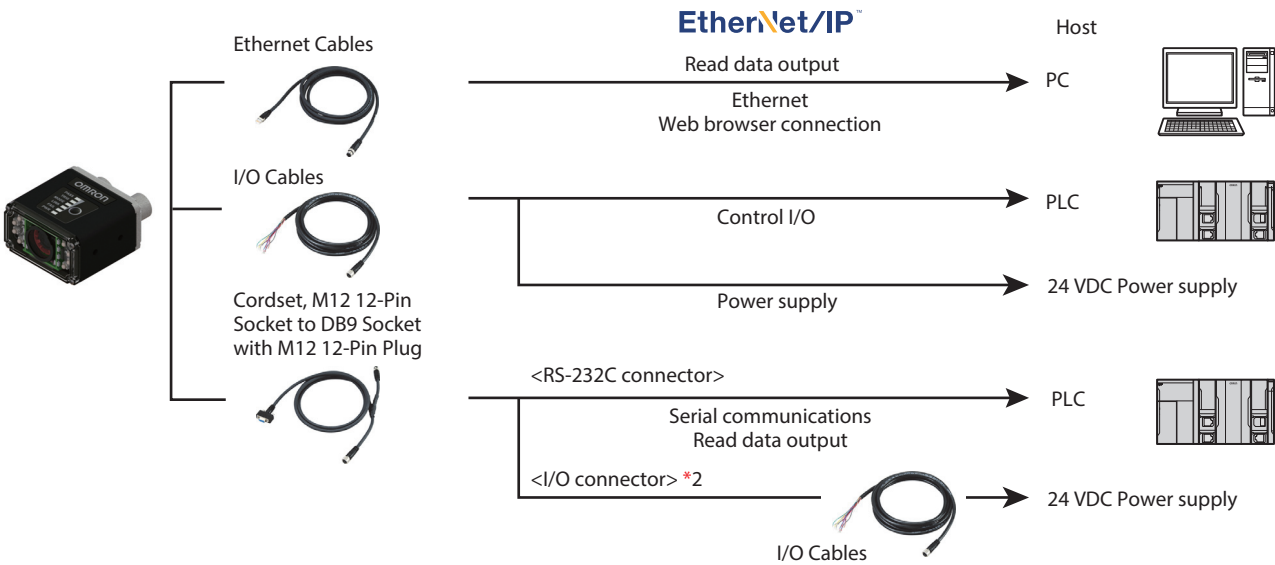

## Alternate Wiring Options

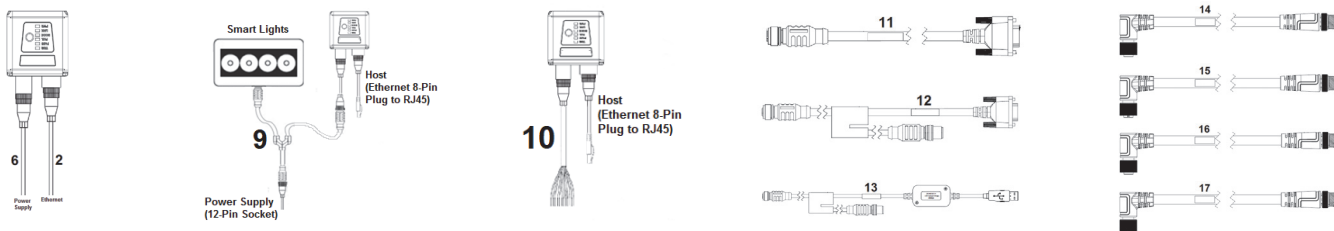

Drawing Reference	Appearance	Category	Length / Spec	Part Number
<b>9</b>		Y Cable, Camera/Power and Smart Light Power (Continuous On)	1 Meter	<b>61-9000135-01</b>
		Y Cable, Camera/Power and Smart Light Strobe Control	1 Meter	<b>61-9000137-01</b>
<b>10</b>		M12 to Flying Leads Cable, Straight Power, IO, RS-232, USB	3 Meters	<b>V430-W8-3M</b>
		M12 to Flying Leads Cable, with Power Filter		<b>V430-W8F-3M</b>
		M12 to Flying Leads Cable, Straight Power, IO, RS-232, USB	5 Meters	<b>V430-W8-5M</b>
		M12 to Flying Leads Cable, with Power Filter		<b>V430-W8F-5M</b>
		M12 to Flying Leads Cable Right Angle Power, IO, RS232, USB	3 Meters - Right Angle Up	<b>V430-W8LU-3M</b>
		M12 to Flying Leads Cable Right Angle, with Power Filter		<b>V430-W8LUF-3M</b>
		M12 to Flying Leads Cable Right Angle Power, IO, RS232, USB	3 Meters - Right Angle Down	<b>V430-W8LD-3M</b>
		M12 to Flying Leads Cable Right Angle, with Power Filter		<b>V430-W8LDF-3M</b>
<b>11</b>		M12 to RS-232 Breakout	1 Meter	<b>V430-WR-1M</b>
			3 Meters	<b>V430-WR-3M</b>
<b>12</b>		Camera to QX-1 Interconnect Cables with RS-232 Breakout	2.7 Meters	<b>V430-WQR-3M</b>
<b>13</b>		Camera to QX-1 Interconnect Cables with USB Keyboard Wedge Breakout	2.7 Meters	<b>V430-WQK-3M</b>
<b>14</b>		M12 12-Pin Plug to M12 12-Pin Socket, Right Angle	3 Meters	<b>61-000148-03</b>
<b>15</b>		M12 12-Pin Plug to M12 12-Pin Socket, Right Angle, Alternate Key	3 Meters	<b>61-000148-04</b>
<b>16</b>		M12 12-Pin Plug to M12 12-Pin Socket, Right Angle	1 Meter	<b>61-000162-03</b>
<b>17</b>		M12 12-Pin Plug to M12 12-Pin Socket, Right Angle, Alternate Key	1 Meter	<b>61-000162-04</b>

## Verification Options

Appearance	Type	Part Number
	AutoVISION Verification Calibration Card with NIST-Traceable Measurement Report	<b>98-000265-01</b>
	AutoVISION Verification Calibration Card	<b>98-000265-02</b>

# F430-F

## F430-F Part Number Structure

Use this legend when defining product part numbers. Please note that not all combinations of parameters are valid. For instance, color cameras are only available with white lighting, and 400 mm fixed focus is only available with UHD lenses. When ordering, use valid part numbers from the tables in the Ordering Information section only.

### F430-F[XXX][Y][ZZZ]-[L][C][P]

Key	Classification	Code	Meaning
XXX	Focus Distance (mm)	000	Autofocus – Variable Distance
		050	Fixed Focus at 50 mm
		064	Fixed Focus at 64 mm
		081	Fixed Focus at 81 mm
		102	Fixed Focus at 102 mm
		133	Fixed Focus at 133 mm
		190	Fixed Focus at 190 mm
		300	Fixed Focus at 300 mm
		400	Fixed Focus at 400 mm
Y	Lens	W	Wide Field of View – 5.2 mm Focal Length Lens
		M	Medium Field of View – 7.7 mm Focal Length Lens
		N	Narrow Field of View – 16 mm Focal Length Lens
		L	Narrow 16 mm Lens – Autofocus to 1160 mm
ZZZ	Sensor	03M	752 x 480 (0.3 MP) Pixel, Mono Sensor, Global Shutter
		12M	1280 x 960 (1.2 MP) Pixel, Mono Sensor, Global Shutter
		50C	2592 x 1944 (5 MP) Pixel, Color Sensor, Rolling Shutter
L	Light Type	N	No Outer Light
		S	Standard Outer Light
		R	Ring Light
C	Light Color	N	No Outer Light
		R	Red
		W	White
P	Software License	S	AutoVISION Sensor (Vision Toolset Only)
		A	AutoVISION (Vision and Code Reading / Verification Toolsets)
		V	Visionscape (Full AutoVISION and Visionscape Toolsets)

#### Example Part Numbers:

- F430-F081W03M-NNS: Fixed Focus at 81 mm, Wide Lens, 0.3 MP Monochrome Sensor, No Outer Light, AutoVISION Sensor
- F430-F000N12M-RRA: Autofocus, Narrow Lens, 1.2 MP Mono, Ring Light, Red, AutoVISION + Verification

## F430-F Valid Product Matrix

Model	Category	Focus Type	Sensor	Lens	Focus Distance (mm)	Light	License
F430-F	Monochrome	Fixed Focus	03M, 12M	W, M	50, 81, 102, 190, 300	None, Red, White	S, A, V
			12M	N	64, 400	None, Red, White	S, A, V
		Autofocus	03M	W, M	50 <-> 300 Autofocus	None, Red, White	S, A, V
			12M	W, M, N	50 <-> 300 (W and M) 40 <-> 150 (N) Autofocus	None, Red, White	S, A, V
	Color	Fixed Focus	50C	W, M	50, 81, 102, 190, 300	None, White	S, A, V
		Autofocus	50C	W, M	50 <-> 300 Autofocus	None, White	S, A, V
	Specialty	Ring Light Autofocus	12M	M, N	50 <-> 300 (M) 40 <-> 150 (N) Autofocus	Red, White (Ring)	S, A, V
		Long Range Autofocus	12M	L	75 <-> 1160 Autofocus	None, Red, White	S, A, V

## F430-F Ordering Information

### Categories:

#### 1. Fixed Focus Camera

- a.) F430-F Monochrome Fixed Focus Camera
- b.) F430-F Color Fixed Focus Camera
- c.) F430-F 1.2 MP Monochrome Fixed Focus Camera with Narrow Lens

#### 2. Autofocus Camera

- a.) F430-F 0.3 MP Monochrome Autofocus Camera (50 – 300 mm)
- b.) F430-F 1.2 MP Monochrome Autofocus Camera (50 – 300 mm for Wide and Medium Lens, 40 – 150 mm for Narrow Lens)
- c.) F430-F Color Autofocus Camera (50 - 300 mm)
- d.) F430-F 1.2 MP Monochrome Autofocus Camera with Ring Light (50 – 300 mm for Medium Lens, 40 – 150 mm for Narrow Lens)
- e.) F430-F 1.2 MP Monochrome Long Range Autofocus Camera (75 - 1160 mm)

### 1a) F430-F Monochrome Fixed Focus Camera: Valid Combinations

**F430-F[XXX][Y][ZZZ]-[L][C][P]**

Key	Classification	Code	Meaning
XXX	Focus Distance (mm)	050	Fixed Focus at 50 mm
		064	Fixed Focus at 64 mm
		081	Fixed Focus at 81 mm
		102	Fixed Focus at 102 mm
		300	Fixed Focus at 300 mm
Y	Lens	W	Wide Field of View - 5.2 mm Focal Length Lens
		M	Medium Field of View – 7.7 mm Focal Length Lens
ZZZ	Sensor	03M	752 x 480 (0.3 MP) Pixel, Mono Sensor, Global Shutter
		12M	1280 x 960 (1.2 MP) Pixel, Mono Sensor, Global Shutter
L	Light Type	N	No Outer Light
		S	Standard Outer Light
C	Light Color	N	No Outer Light
		R	Red
		W	White
P	Software License	S	AutoVISION Sensor (Vision Toolset Only)
		A	AutoVISION (Vision and Code Reading / Verification Toolsets)
		V	Visionscape (Full AutoVISION and Visionscape Toolsets)

### 1b) F430-F 5.0 MP Color Fixed Focus Camera: Valid Combinations

**Note:** 5 MP Color cameras are available with No or White light options only.

**F430-F[XXX][Y]50C-[L][C][P]**

Key	Classification	Code	Meaning
XXX	Focus Distance (mm)	050	Fixed Focus at 50 mm
		064	Fixed Focus at 64 mm
		081	Fixed Focus at 81 mm
		102	Fixed Focus at 102 mm
		300	Fixed Focus at 300 mm
Y	Lens	W	Wide Field of View - 5.2 mm Focal Length Lens
		M	Medium Field of View – 7.7 mm Focal Length Lens
L	Light Type	N	No Outer Light
		S	Standard Outer Light
C	Light Color	N	No Outer Light
		W	White
P	Software License	S	AutoVISION Sensor (Vision Toolset Only)
		A	AutoVISION (Vision and Code Reading / Verification Toolsets)
		V	Visionscape (Full AutoVISION and Visionscape Toolsets)

## F430-F

### 1c) F430-F 1.2 MP Monochrome Fixed Focus Camera with Narrow Lens: Valid Combinations

**Note:** Fixed Focus Narrow lens option available for 1.2 MP Mono camera only.

#### F430-F[XXX]N12M-[L][C][P]

Key	Classification	Code	Meaning
XXX	Focus Distance (mm)	064	Fixed Focus at 64 mm
		400	Fixed Focus at 400 mm
L	Light Type	N	No Outer Light
		S	Standard Outer Light
C	Light Color	N	No Outer Light
		R	Red
		W	White
P	Software License	S	AutoVISION Sensor (Vision Toolset Only)
		A	AutoVISION (Vision and Code Reading / Verification Toolsets)
		V	Visionscape (Full AutoVISION and Visionscape Toolsets)

### 2a) F430-F 0.3 MP Monochrome Autofocus Cameras (50 – 300 mm): Valid Combinations

#### F430-F000[Y]03M-[L][C][P]

Key	Classification	Code	Meaning
Y	Lens	W	Wide Field of View - 5.2 mm Focal Length Lens
		M	Medium Field of View – 7.7 mm Focal Length Lens
ZZZ	Sensor	03M	752 x 480 (0.3 MP) Pixel, Mono Sensor, Global Shutter
		12M	1280 x 960 (1.2 MP) Pixel, Mono Sensor, Global Shutter
L	Light Type	N	No Outer Light
		S	Standard Outer Light
C	Light Color	N	No Outer Light
		R	Red
		W	White
P	Software License	S	AutoVISION Sensor (Vision Toolset Only)
		A	AutoVISION (Vision and Code Reading / Verification Toolsets)
		V	Visionscape (Full AutoVISION and Visionscape Toolsets)

### 2b) F430-F 1.2 MP Monochrome Autofocus Camera (50 – 300 mm for Wide and Medium, 40 – 150 mm for Narrow): Valid Combinations

#### F430-F000[Y]12M-[L][C][P]

Key	Classification	Code	Meaning
Y	Lens	W	Wide Field of View - 5.2 mm Focal Length Lens
		M	Medium Field of View – 7.7 mm Focal Length Lens
		N	Narrow Field of View – 16 mm Focal Length Lens
L	Light Type	N	No Outer Light
		S	Standard Outer Light
C	Light Color	N	No Outer Light
		R	Red
		W	White
P	Software License	S	AutoVISION Sensor (Vision Toolset Only)
		A	AutoVISION (Vision and Code Reading / Verification Toolsets)
		V	Visionscape (Full AutoVISION and Visionscape Toolsets)



**2c) F430-F 5.0 MP Color Autofocus Camera (50 - 300 mm): Valid Combinations**

**Note:** Narrow Autofocus lens option not available for color camera.

**F430-F000[Y]50C-[L][C][P]**

Key	Classification	Code	Meaning
Y	Lens	W	Wide Field of View - 5.2 mm Focal Length Lens
		M	Medium Field of View – 7.7 mm Focal Length Lens
L	Light Type	N	No Outer Light
		S	Standard Outer Light
C	Light Color	N	No Outer Light
		W	White
P	Software License	S	AutoVISION Sensor (Vision Toolset Only)
		A	AutoVISION (Vision and Code Reading / Verification Toolsets)
		V	Visionscape (Full AutoVISION and Visionscape Toolsets)

**2d) F430-F 1.2 MP Monochrome Autofocus Camera with Ring Light (50 – 300 mm for Medium, 40 – 150 mm for Narrow): Valid Combinations**

**Note:** Ring Light version is available for Autofocus, Medium, and Narrow lens, 1.2 MP Monochrome camera only.

**F430-F000[Y]12M-R[C][P]**

Key	Classification	Code	Meaning
Y	Lens	M	Medium Field of View – 7.7 mm Focal Length Lens
		N	Narrow Field of View – 16 mm Focal Length Lens
C	Light Color	R	Red
		W	White
P	Software License	S	AutoVISION Sensor (Vision Toolset Only)
		A	AutoVISION (Vision and Code Reading / Verification Toolsets)
		V	Visionscape (Full AutoVISION and Visionscape Toolsets)

**2e) F430-F 1.2 MP Monochrome Long Range Autofocus Camera (75 - 1160 mm): Valid Combinations**


**Note:** Autofocus Long Range lens option available for 1.2 MP Monochrome camera only.

**F430-F000L12M-[L][C][P]**

Key	Classification	Code	Meaning
L	Light Type	N	No Outer Light
		S	Standard Outer Light
C	Light Color	N	No Outer Light
		R	Red
		W	White
P	Software License	S	AutoVISION Sensor (Vision Toolset Only)
		A	AutoVISION (Vision and Code Reading / Verification Toolsets)
		V	Visionscape (Full AutoVISION and Visionscape Toolsets)

Field of View Charts

Specifications are subject to change.

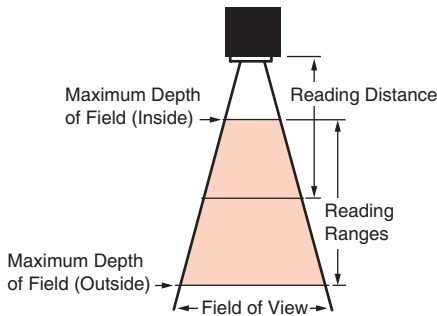

Fixed Focus Field of View (mm) - Wide Lens

	0.3 MP		1.2 MP		5 MP	
Distance (mm)	Width	Height	Width	Height	Width	Height
50	49	32	53	39	50	38
81	76	49	81	61	78	58
102	95	60	101	75	96	72
190	171	109	182	136	174	130
300	266	170	283	213	271	202

Fixed Focus Field of View (mm) - Medium Lens

	0.3 MP		1.2 MP		5 MP	
Distance (mm)	Width	Height	Width	Height	Width	Height
50	34	22	36	27	35	26
81	53	34	56	42	54	40
102	66	42	70	52	67	50
190	119	76	126	95	121	90
300	185	118	196	147	188	140

Fixed Focus Field of View (mm) - Narrow Lens

	1.2 MP	
Distance (mm)	Width	Height
64	21	15
400	118	88

### Autofocus Field of View (mm) - Wide Lens

Distance (mm)	0.3 MP		1.2 MP		5 MP	
	Width	Height	Width	Height	Width	Height
50	51	33	55	41	52	39
100	97	62	103	77	98	73
150	142	90	151	113	144	107
200	187	119	199	149	190	142
250	232	148	247	185	236	176
300	277	177	295	221	282	210

### Autofocus Field of View (mm) - Medium Lens

Distance (mm)	0.3 MP		1.2 MP		5 MP	
	Width	Height	Width	Height	Width	Height
50	33	21	36	27	34	25
100	63	40	67	50	64	48
150	92	59	98	73	94	70
200	121	77	129	97	123	92
250	151	96	160	120	153	114
300	180	115	191	144	183	136

### Autofocus Field of View (mm) - Narrow Lens

Distance (mm)	1.2 MP	
	Width	Height
50	16	12
100	31	23
150	45	34

### Long Range Autofocus Field of View (mm)

Distance (mm)	1.2 MP	
	Width	Height
75	24	18
100	31	23
200	60	45
300	89	67
400	118	88
500	147	110
600	176	132
700	204	153
800	233	175
900	262	197
1000	291	218
1200	349	262
1300	378	283
1400	407	305
1500	436	327

# F430-F

## Ratings and Specifications

F430-F		F430-F□□□□□03M-□□□□	F430-F□□□□□12M-□□□□	F430-F□□□□□50C-□□□□
Symbolologies *1	1D Symbolologies	Code 39, Code 128, BC412, Interleaved 2 of 5, UPC/EAN, Codabar, Code 93, Pharmacode, PLANET, Postnet, Japanese Post, Australian Post, Royal Mail, Intelligent Mail, KIX		
	2D Symbolologies	Data Matrix (ECC 0-200), QR Code, Micro QR Code, Aztec Code, DotCode, DMRE		
	Stacked Symbolologies	PDF417, MicroPDF417, GS1 Databar (Composite and Stacked)		
Reading Performance *2	Number of Reading Digits	No Upper Limit (depending on bar width and reading distance)		
	Aiming Light	Two Blue LEDs		
	Illumination	Inner LEDs: Four White and Four Red (Wavelength: 625 nm)		
		Outer LEDs: 8 Red or White	Outer LEDs: 8 Red or White; 24 Red or White for F430-F□□□□□12M-R□□	Outer LEDs: 8 White
	Reading Distance / Field of View	Refer to <i>Field of View Charts</i> for details.		
	Pitch Angle (α) *3	±30°		
	Skew Angle (β) *3	±30°		
	Tilt Angle (γ) *3	±180°		
Vision Tools		Locate, Decode, Optical Character Recognition (OCR), Count, Presence/Absence, Measure, Match String, String Format, Logic, Optical Character Verification (OCV), Symbol Quality Verification, Color Identification, Color Match		
Image Capture	Focus	Liquid Lens Autofocus or Fixed Focus (Wide = 5.2 mm, Medium = 7.7 mm, Narrow = 16 mm, L = 16 mm)		
	Resolution	752 (H) x 480 (V)	1280 (H) x 960 (V)	2592 (H) x 1944 (V)
	Color / Monochrome	Monochrome CMOS	Monochrome CMOS	Color CMOS
	Shutter	Global Shutter	Global Shutter	Rolling Shutter
	Frames per Second	52 fps	40 fps	5 fps
	Exposure	50 to 66,667 μs	50 to 58,825 μs	50 to 66,667 μs
Image Logging		FTP		
Trigger		External Trigger (Edge or Level), Communication Trigger (Ethernet, RS-232C)		
I/O Specifications	Input Signals	Trigger Input; New Master: Bi-Directional, Optoisolated, 4.5-28 V rated (10 mA @ 28 VDC)		
	Output Signals	3 Signals : Bi-Directional, Optoisolated, 1-28 V rated, (ICE < 100 mA at 24 VDC, current limited by user)		
Communication	Connectivity	RS-232C, Ethernet TCP/IP, EtherNet/IP, PROFINET		
	Ethernet Specifications	100BASE-TX / 10BASE-T		
Indicator LEDs		PASS (Green), TRIG (Amber), MODE (Amber), LINK (Amber), FAIL (Red), PWR (Green)		
Power Supply Voltage		DC24V (Ambient Voltage Range: DC5~30V) *5		
Current Consumption		0.18 A at 24 VDC (max.)		
Environmental Immunity *4	Ambient Temperature Range	Operating: 0 to 45° C Storage: -50 to 75° C (No Icing or Condensation)		
	Ambient Humidity Range	Operating and storage: 5% to 95% (Non-Condensing)		
	Ambient Atmosphere	No Corrosive Gases		
	Vibration Resistance (Destructive)	Sine Vibration: 10 Hz to 55 Hz, 0.35 mm displacement, 20 cycles/axis. Random Vibration: 20 Hz to 2000 Hz, 6.295 Grms, 30 min/axis		
	Shock Resistance (Destructive)	50 G, 11 ms, sawtooth profile. 3X in each X, Y, Z axis		
	Degree of Protection	IEC 60529 IP65 and IP67		
Weight	Main Body Only	Approx. 68 g		
	Packaging Weight	Approx. 174 g (including packing)		
Dimensions	Main Body Dimensions	44.5 (W) x 44.5 (D) x 25.4 (H) mm		
	Packaging Dimensions	170 (W) x 117 (D) x 86 (H) mm		
Accessories		ReadMeFirst, CE Compliance Sheet		
LED Safety Standard		IEC 62471-1: 2006 Risk-Exempt Group		
Safety Standards		EN 61326-1:2013 FCC Part 15, Subpart B (Class B) UL60950-1 RCM, KC, EAC		
Materials	Case	Aluminum Diecast, Alumite (Black)		
	Reading Window	Acrylic		
Software		AutoVISION, Visionscape FrontRunner		

\*1. These symbolologies are supported based on Omron's read capability validation standard. Omron recommends that validation be performed for each application.

\*2. Unless otherwise specified, reading performance is defined with center of field of view, angle R=∞.




\*4. In an electrically noisy environment, use only the F430-F in combination with a noise filter cable (V430-W□F-□M) to ensure proper operation.


\*5. UL certification rating is DC24V. Maximum ripple is 200 mV p-p.

Dimensions


F430-F

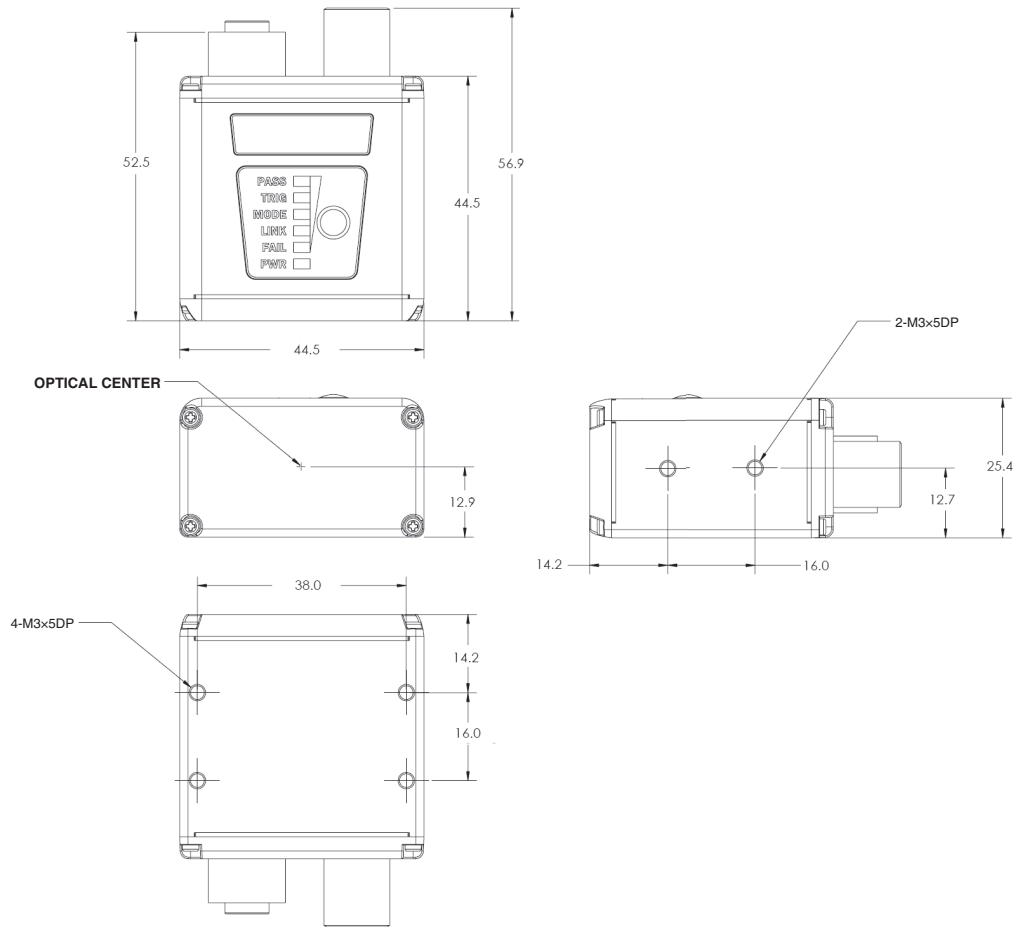


F430-F with Alternate Optics and Illumination

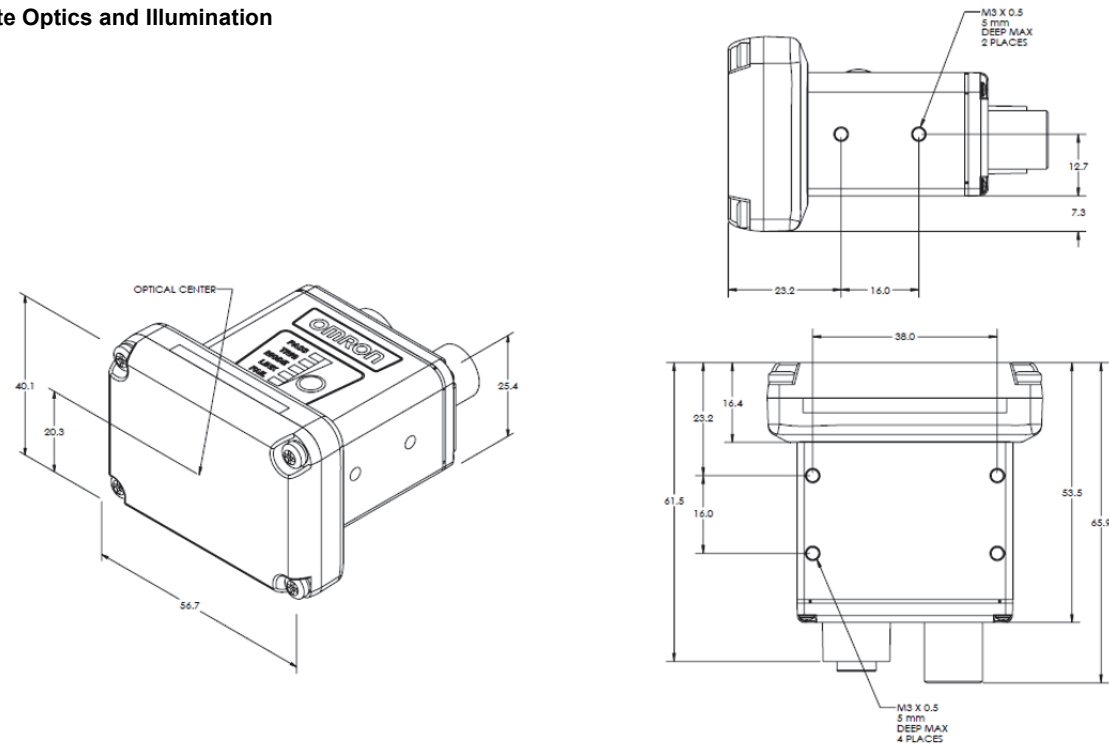


## L Bracket Adjustable Angle Mounting Kit V430-AM0

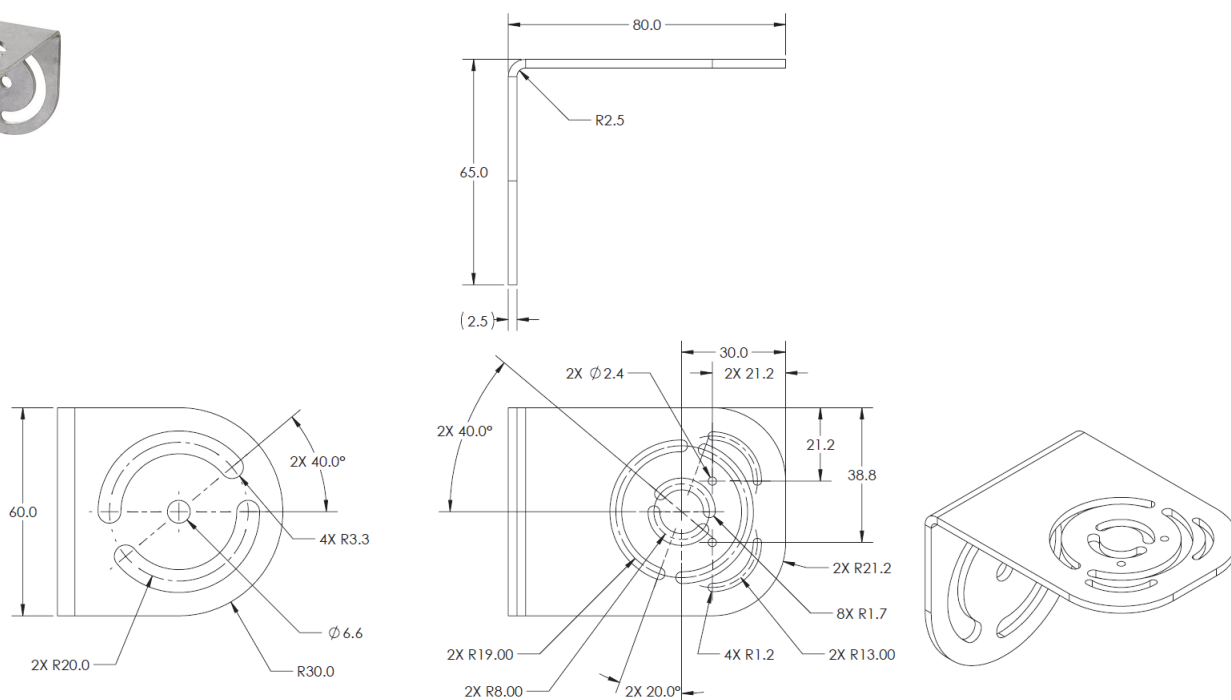


## 1/4-20 Camera Mounting Block Kit V430-AM1

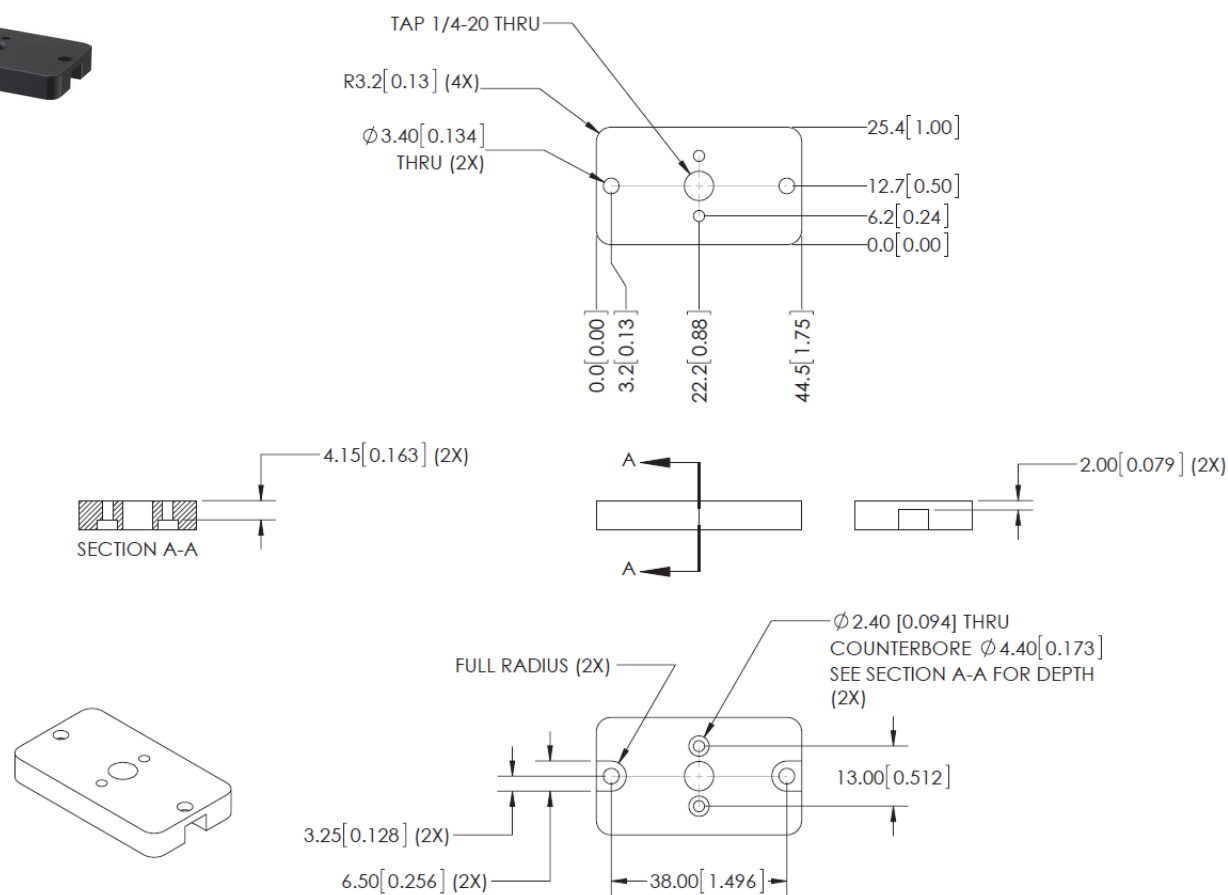


**4" (102 mm) Ram Mount Stand  
V430-AM2**

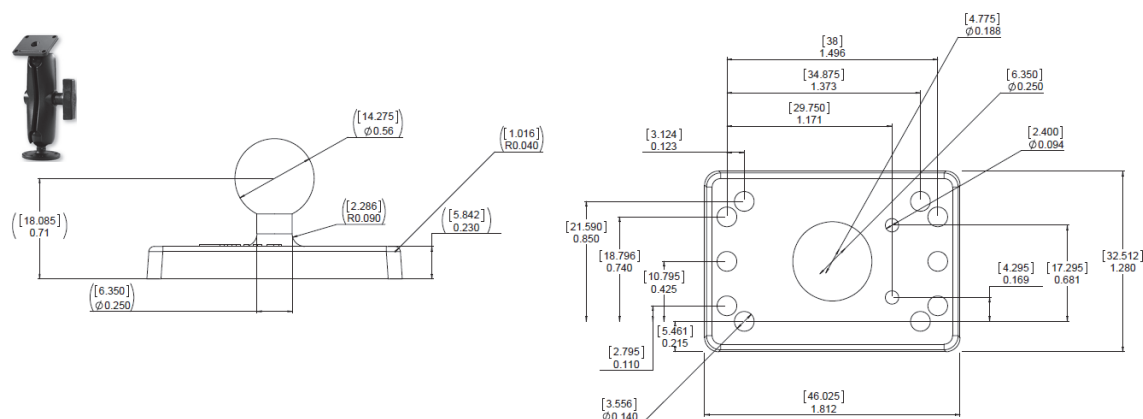



## APG Pan and Tilt Camera Mount V430-AM3

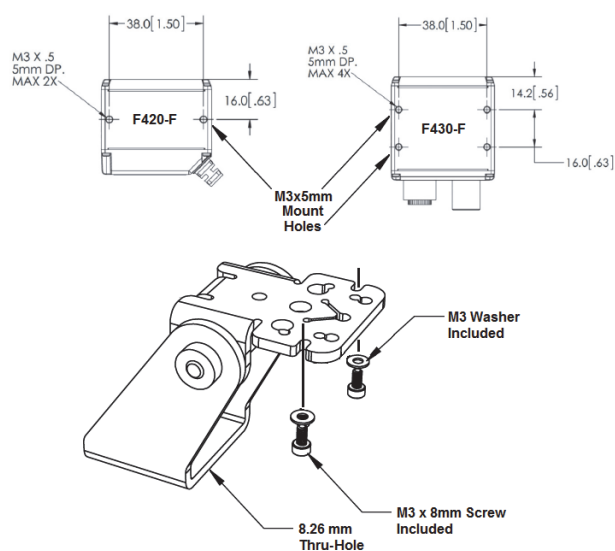

## MS-4 / MINI to V/F4XX-F Adapter Plate V430-AM5

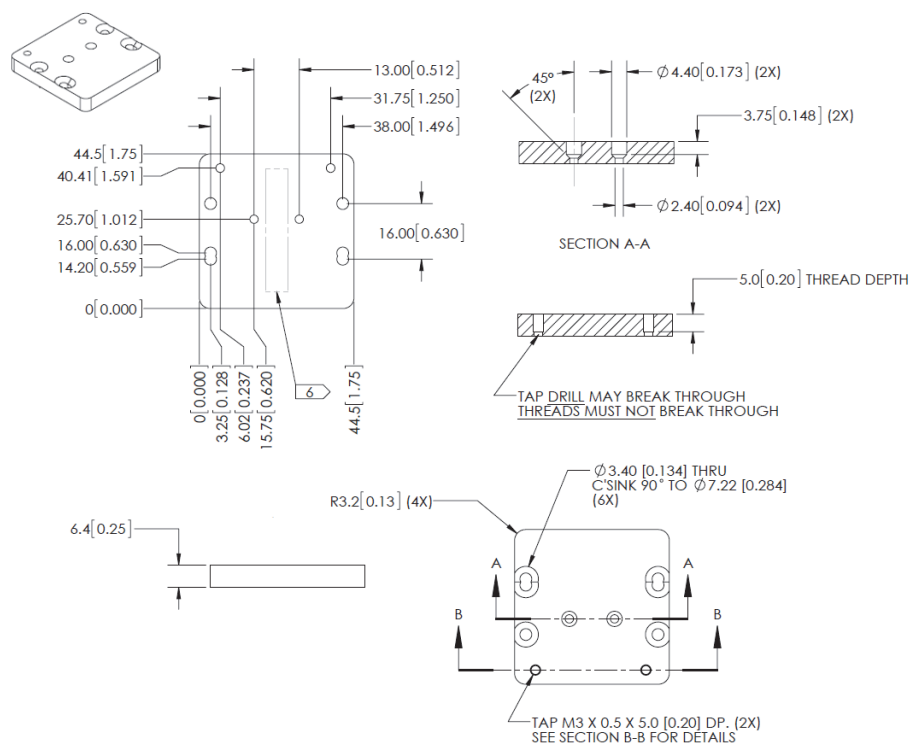



## Smart Ring Light to V/F4XX-F Mounting Bracket V430-AM6






Screws required:

2 M3x6 mm screws to mount light to bracket

2 M3x6 mm screws to mount camera to bracket

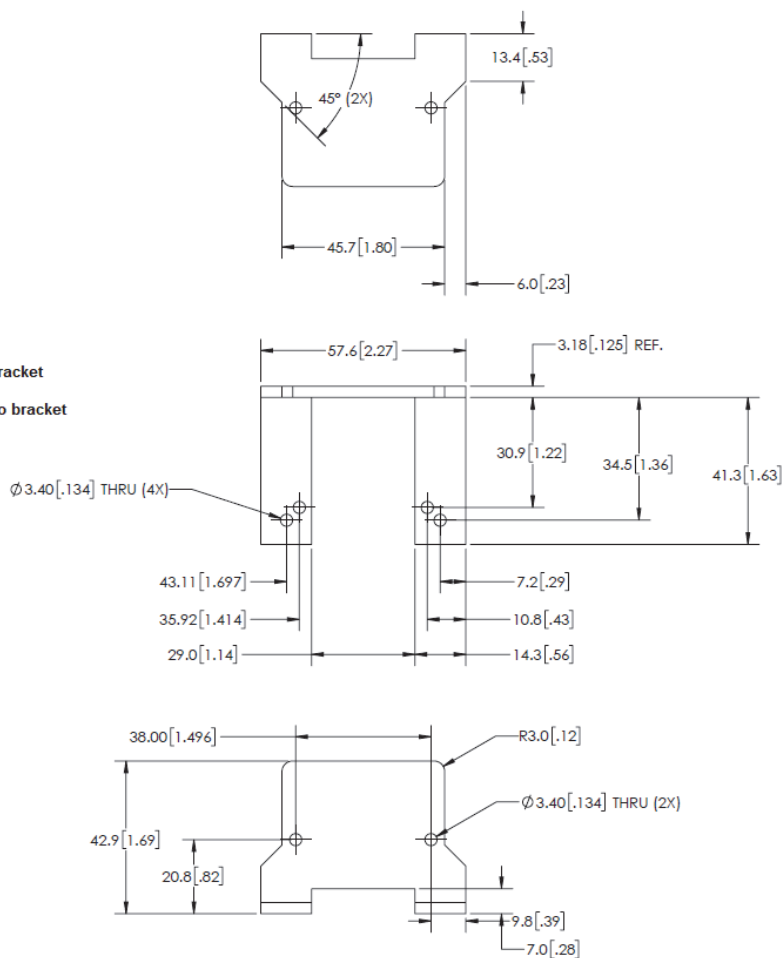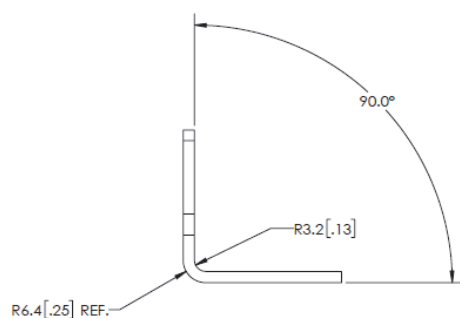

## QX / Vision HAWK to V/F4XX-F Adapter Plate V430-AM7

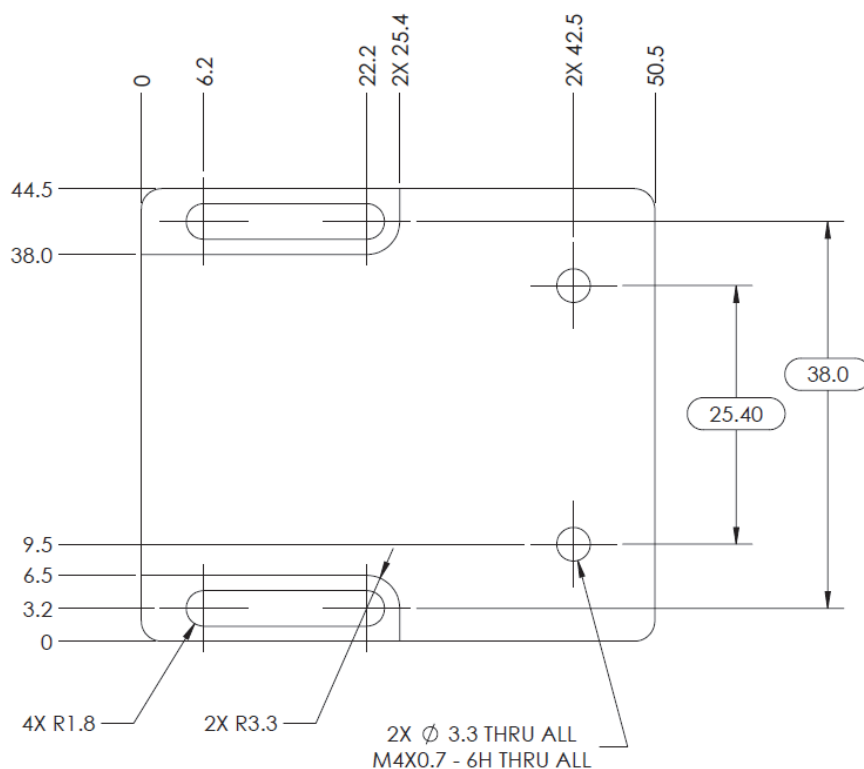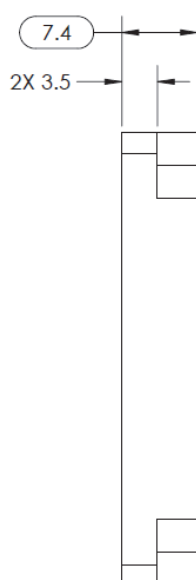





Front Window Installation Kit  
V430-AF10 \*

Diffuser Installation Kit  
V430-AF11 \*





Polarizer Installation Kit  
V430-AF12 \*

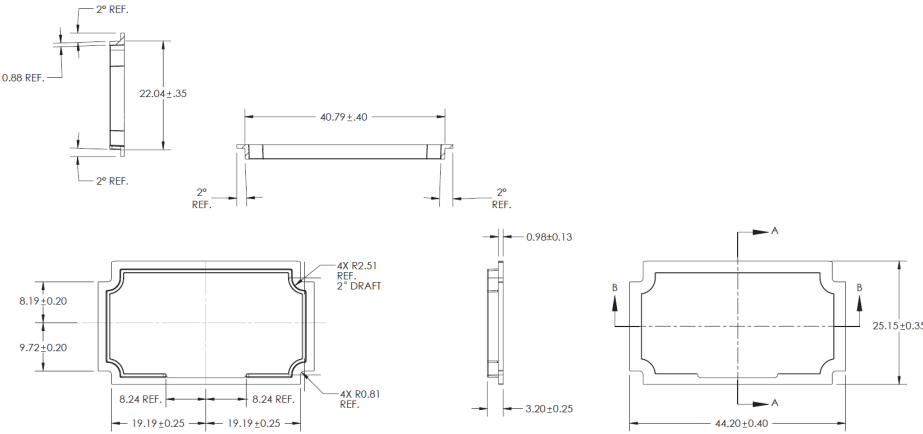


\* **Note:** V430-AF10, AF11, and AF12 are used for **MicroHAWK V/F4X0-FXXXXXXX-XXX** cameras in this manual. The prior generation **MicroHAWK V430-FXXXXXXX** code camera uses part numbers V430-AF0, AF1, and AF2. Please select the correct accessory from the table based on your camera part number format.

Accessory	Prior V430-FXXXXXXX Code Reader	New V/F4X0-FXXXXXXX-XXX Code Reader and Smart Camera
Front Window Installation Kit	V430-AF0	V430-AF10
Diffuser Installation Kit	V430-AF1	V430-AF11
Polarizer Installation Kit	V430-AF2	V430-AF12

Right Angle Mirror Installation Kit  
V430-AF3

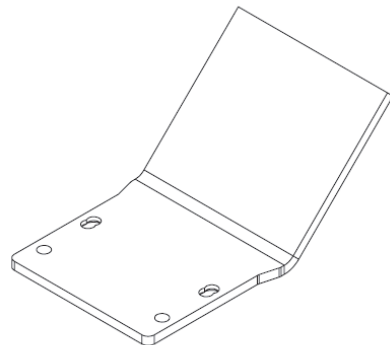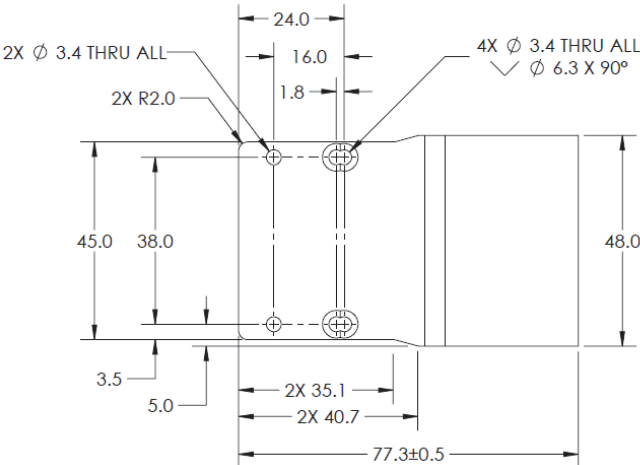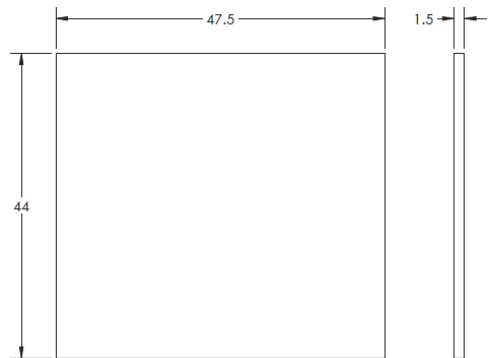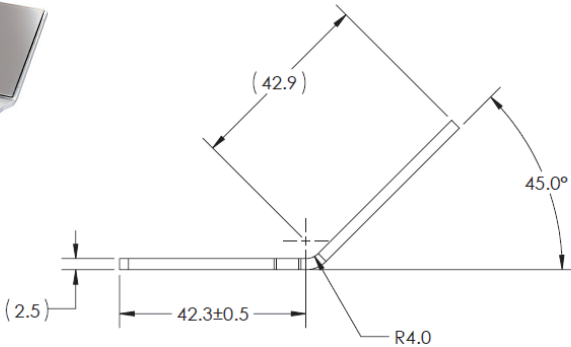

YAG Laser Filter Window  
V430-AF4



**Window Material**  
Polymer

**Laser Type**  
Argon  
Broadband  
KTP  
Nd:YAG

**Protection**  
OD 6+ @ 200-532 nm  
OD 4+ @ 850-879 nm  
OD 5+ @ 900-1070 nm


The V430-AF4 YAG Laser Filter is used to block a range of wavelengths from a variety of laser types from being seen by the MicroHAWK camera that will either disrupt the cameras view of the object, or damage the MicroHAWK sensor.

The table shows the laser types that are handled by the V430-AF4 Filter window, as well as the level of protection they provide at the various wavelengths.

**Note:** Optical Density (OD) is a measure of the attenuation of energy passing through a filter. The higher the OD value, the higher the attenuation and the greater the protection level.

- OD 4 blocks 99.99% of the laser energy.
- OD 5 blocks 99.999% of the laser energy (YAG).
- OD 6 blocks 99.9999% of the laser energy (Argon, KTP)

ESD-Safe Window  
V430-AF5




An ESD event occurs when an electrostatic charge rapidly transfers between two objects. This transfer is usually caused when two objects with a notable potential difference in electrical charge contact each other. However, ESD events can also happen when two objects close to one another create a highly charged electrostatic field.

ESD safety precautions are extremely important in the electronics and semiconductor industries where sensitive components can be damaged even by a discharge of a mere 20 volts. Less sensitive components may still be susceptible, and cumulative discharges can create long-term problems affecting the functionality and performance of electronic components.


The MicroHAWK V430-AF5 ESD-Safe window is designed with an ESD coating on the exterior surface to prevent static discharge between the camera or smart camera when the camera is deployed close to the component surface. The antistatic coating offers a resistivity of  $\leq 1.0 \times 10^9 \Omega/\text{sq}$  to prevent these electrostatic discharges.




QX-1 Photo Sensor, M12 4-Pin Plug, NPN – 2 Meters – Light ON / Dark ON  
99-9000016-01

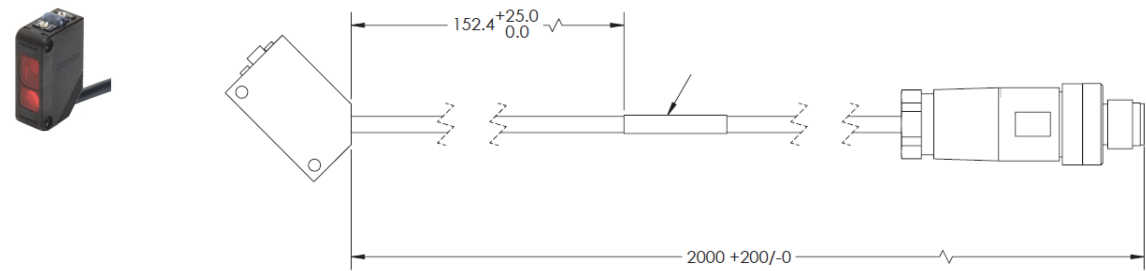




QX-1 Field-Wireable M12 4-Pin Plug for Any Trigger Source or Photo Sensor – Screw Terminals  
98-9000239-01

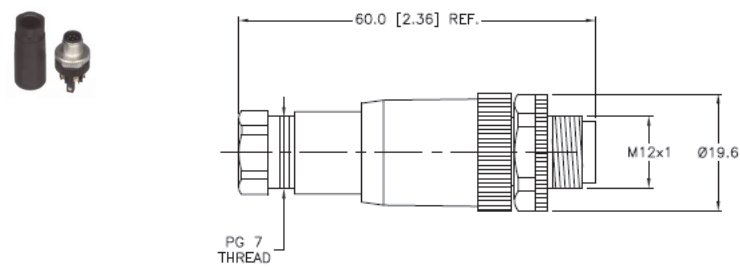

Power Supply, 100-240VAC, +24VDC, M12 12-Pin Socket – 1 Meter – U.S. / Euro Plug  
97-000012-01

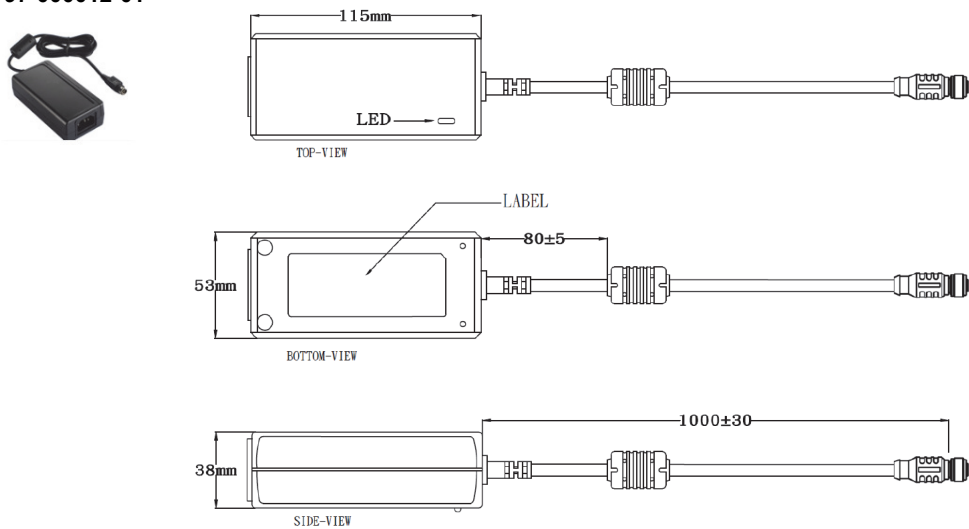

Omron Microscan Smart Light Series – Integrated Power and Strobe Control Module  
See Omron Microscan Smart Light Offering – Ring, DOAL, Large Area Lighting

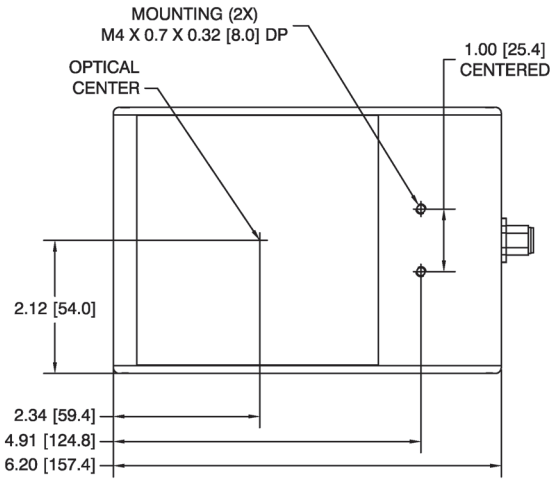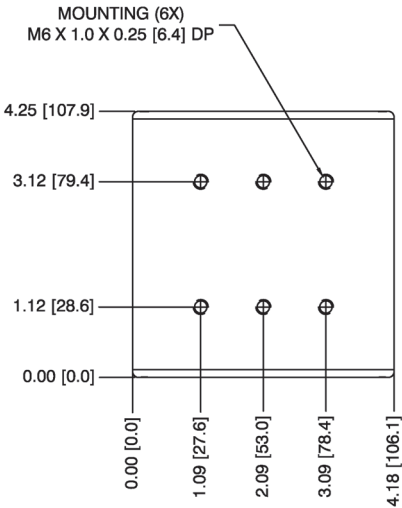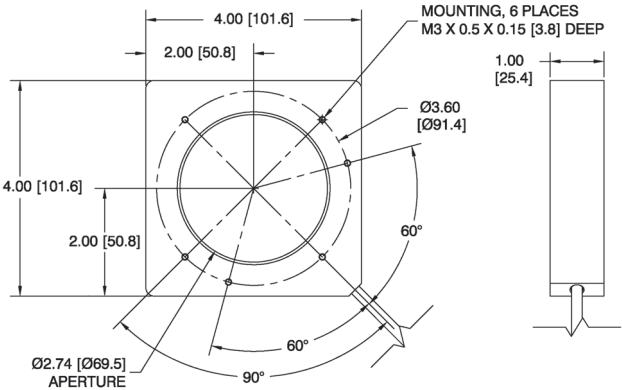













## Ethernet Communication Cables – Straight Connectors – 1 Meter, 3 Meters, or 5 Meters

### M12 Plug on Camera to RJ45 Connector


V430-WE-1M

V430-WE-3M


V430-WE-5M

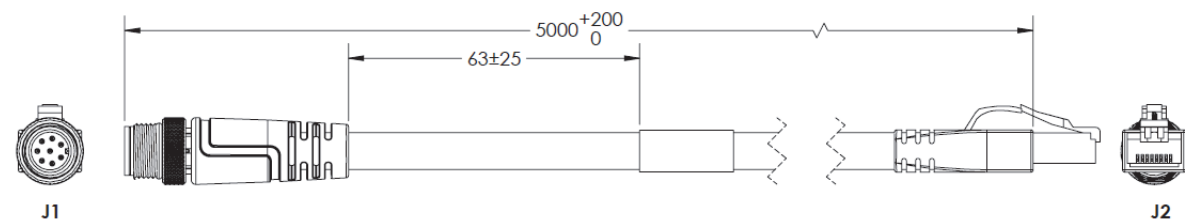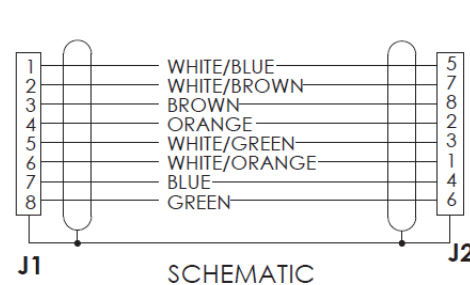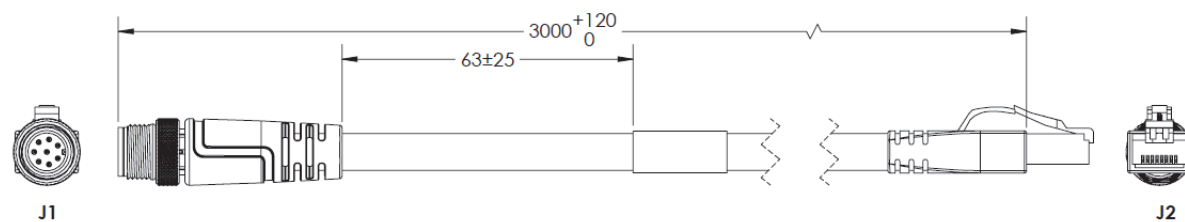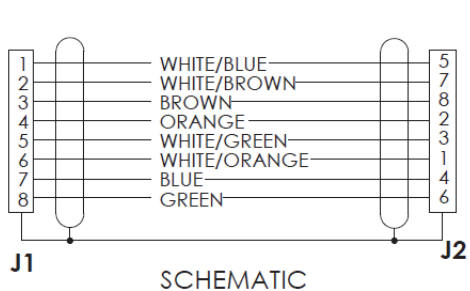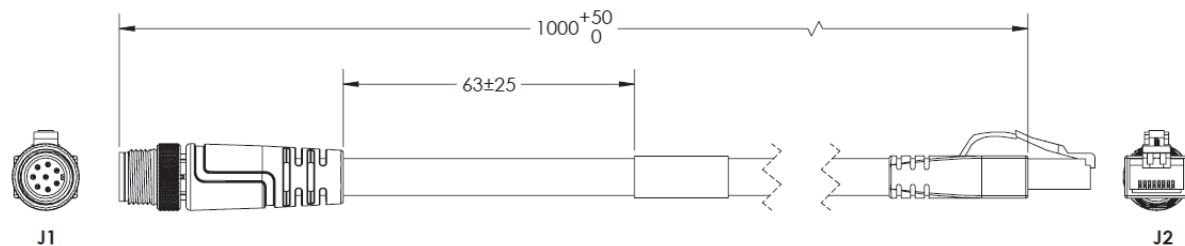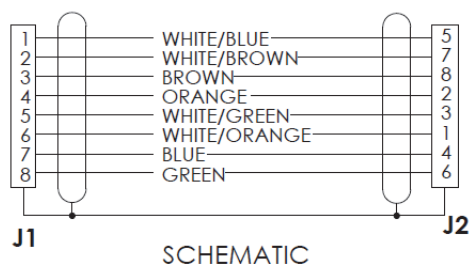


**Ethernet Communication Cables – Right Angle M12 Connectors – 3 Meters**  
**M12 Plug on Camera to RJ45 Connector**  
**V430-WELU-3M (Right Angle Up)\***  
**V430-WELD-3M (Right Angle Down)\***



**\*Right angle up**

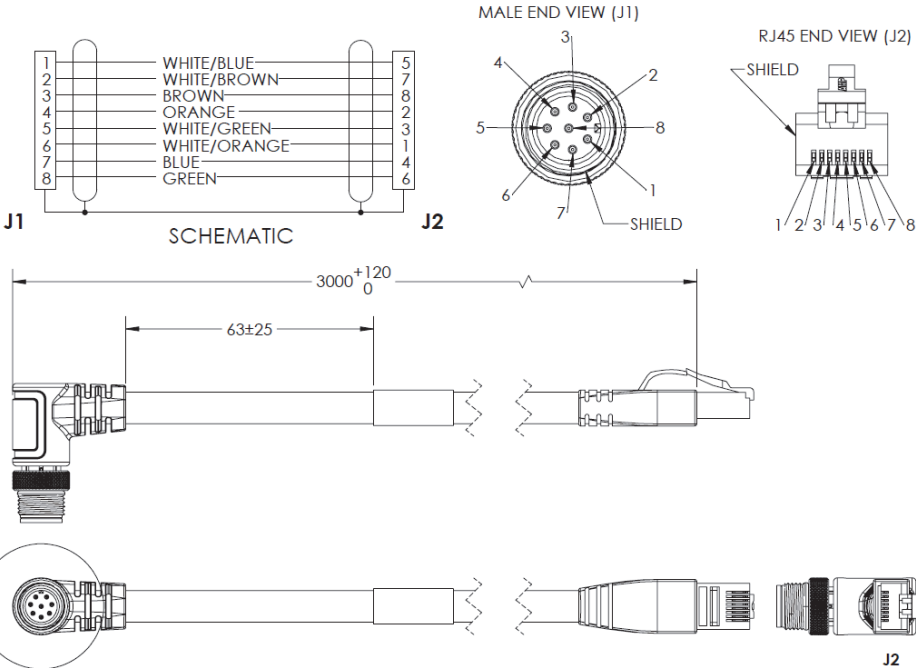

**\*Right angle down**

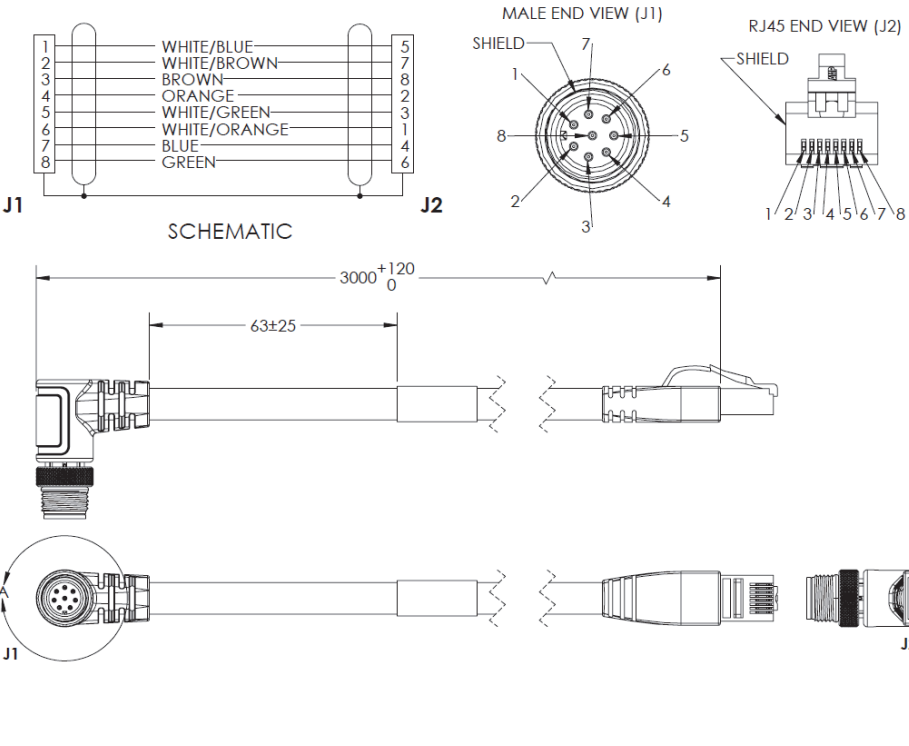

# F430-F

Camera to QX-1 Interconnect Cables – 1 Meter, 3 Meters, or 5 Meters




M12 Socket to M12 Plug

QX-1 is used as breakout module for common IO signals and power.

V430-WQ-1M


V430-WQ-3M

V430-WQ-5M

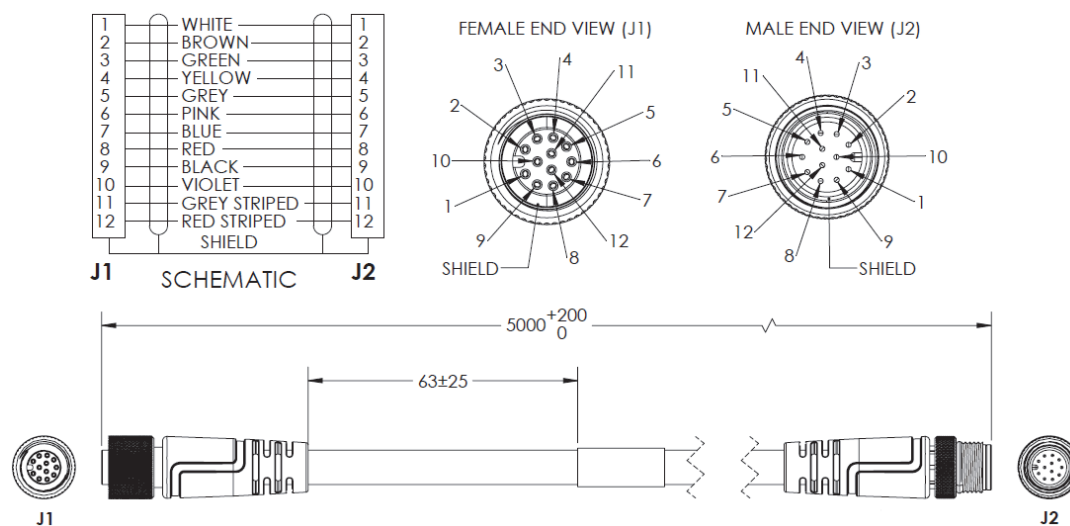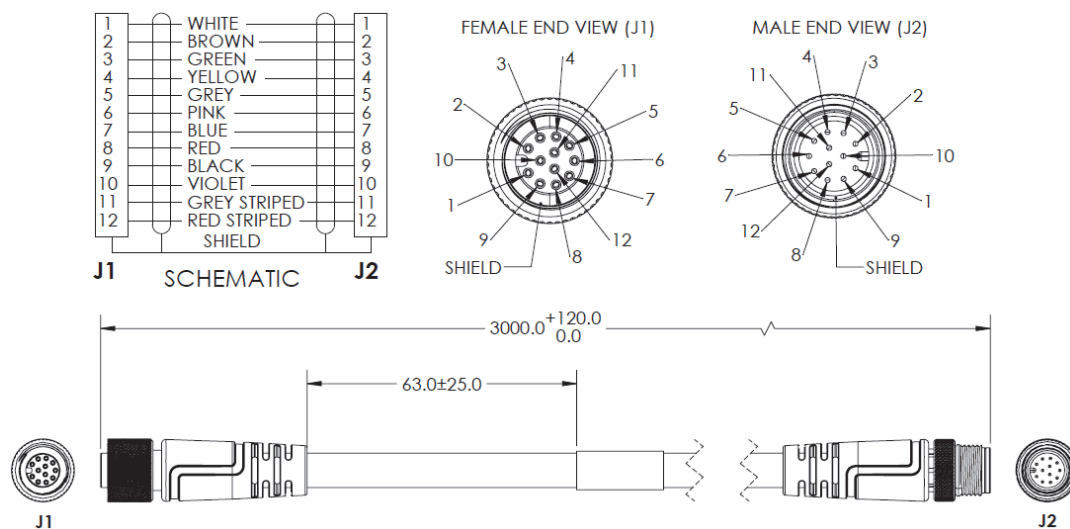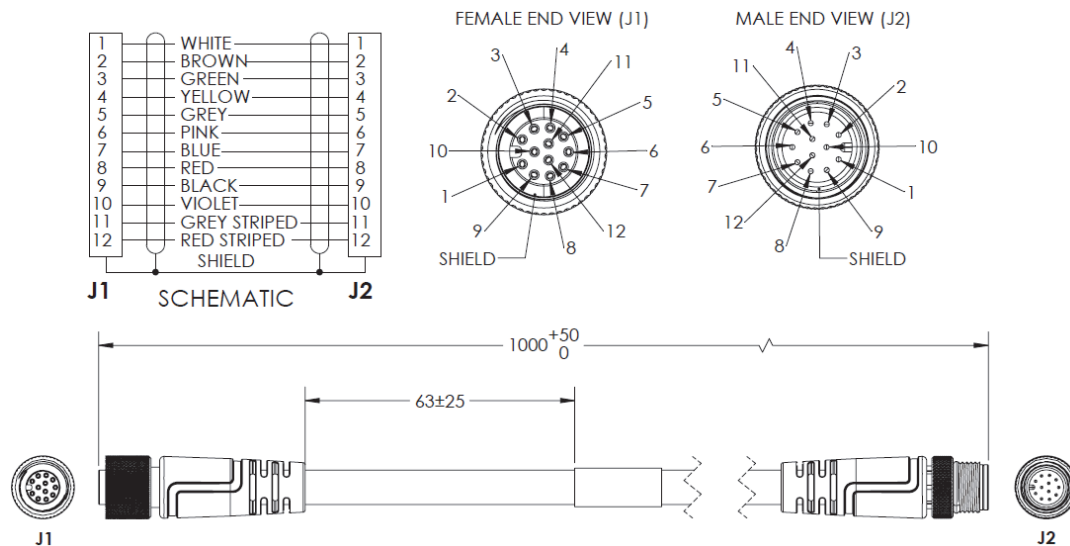




### M12 Socket to M12 Plug, with Power Filter – 300 mm V430-WQF-1M

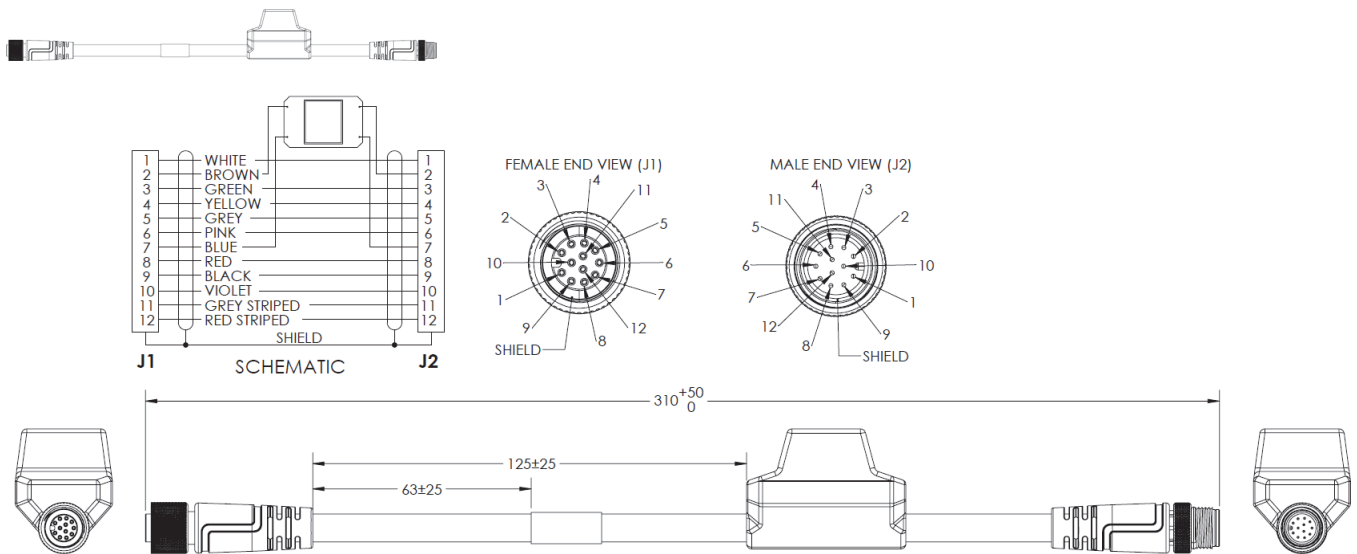


### QX-1 M12 to Smart Light Power and Strobe Control Cables – 3 Meters M12 Plug on QX-1 to 5 Pin Socket on Light 61-000204-01 (Continuous Power) 61-000218-01 (Strobe Control)


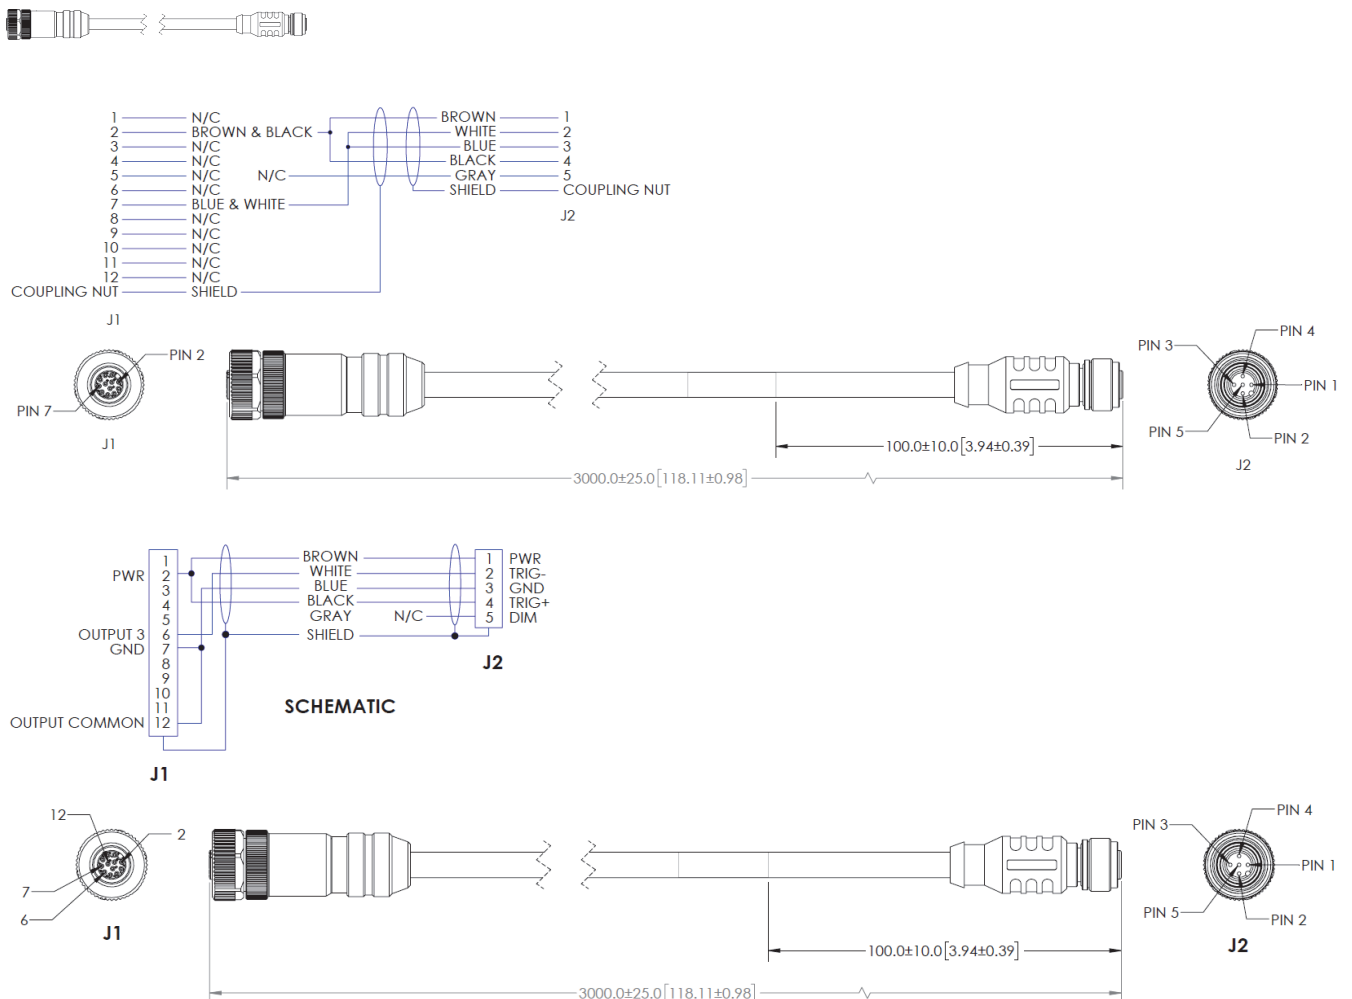


Y Cable, Camera/Power and Smart Light Power (Continuous On) – 1 Meter  
61-9000135-01




Y Cable, Camera/Power and Smart Light Strobe Control – 1 Meter  
61-9000137-01

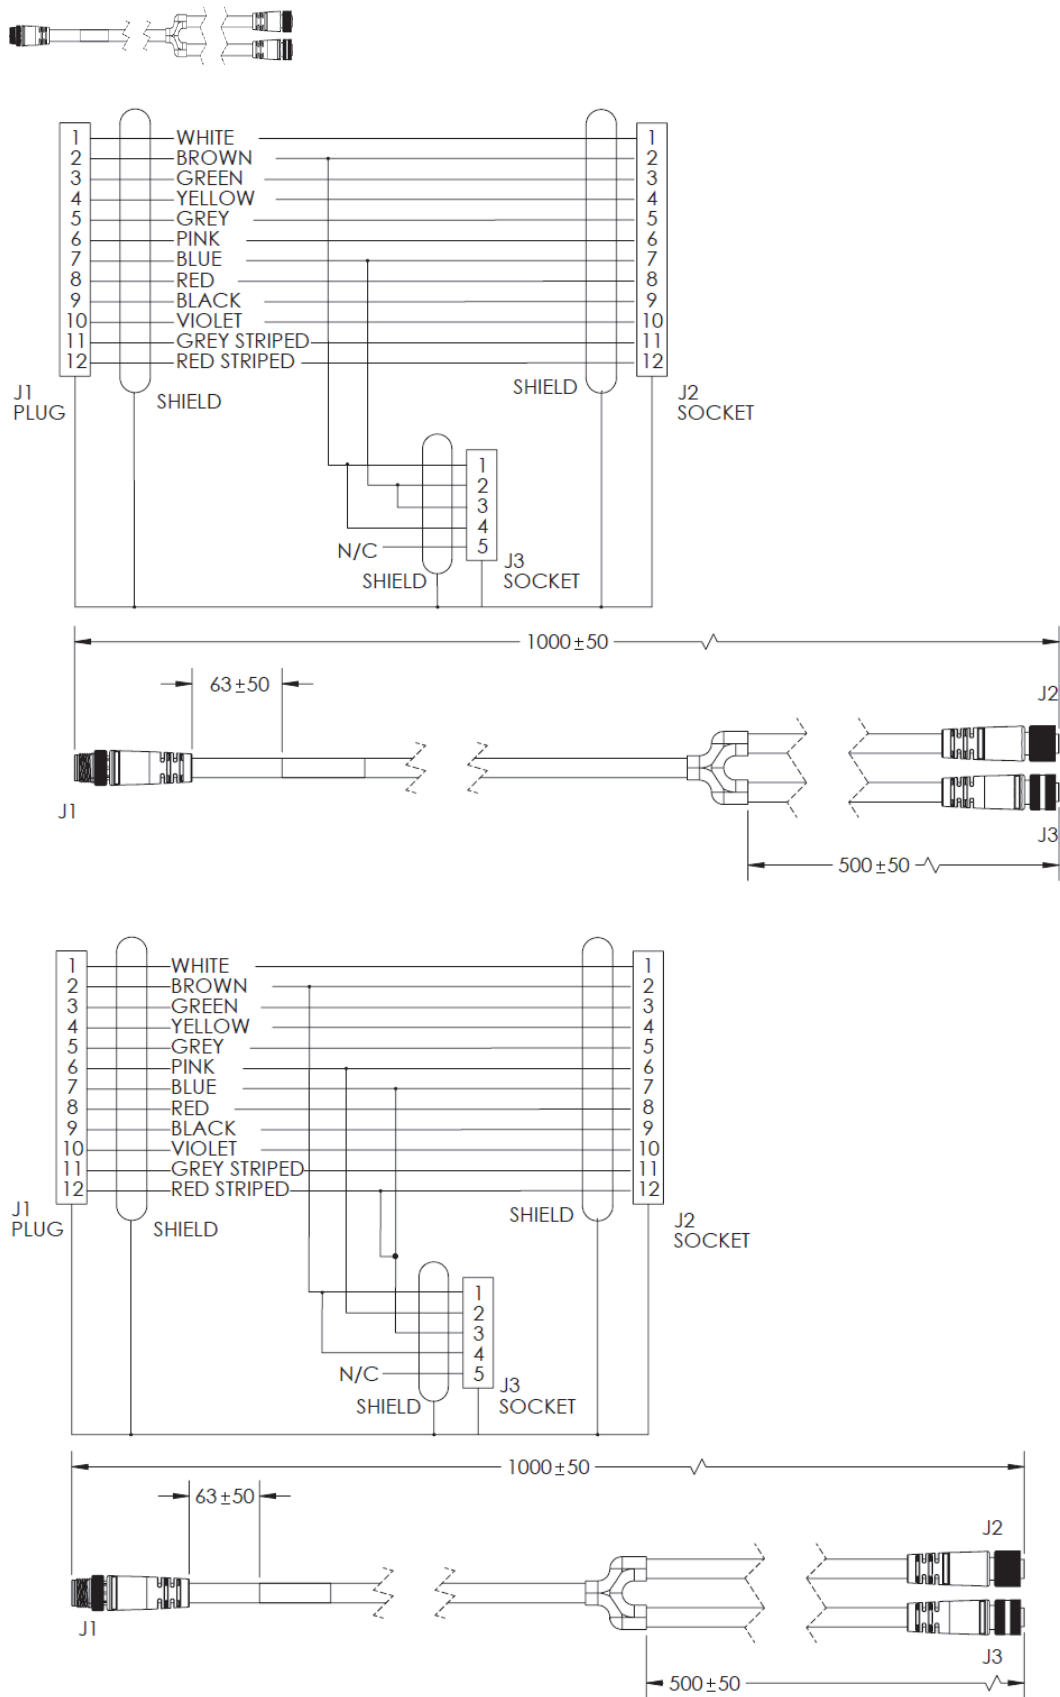



**M12 to Flying Leads Cable, Straight Power, IO, RS-232, USB – 3 Meters or 5 Meters**  
**V430-W8-3M**  
**V430-W8-5M**

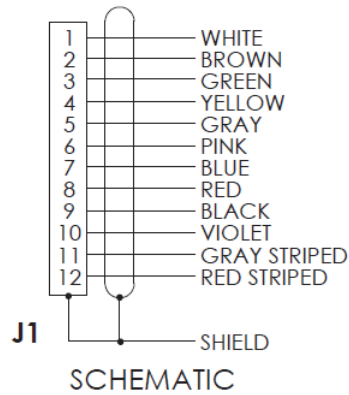

**FEMALE END VIEW (J1)**

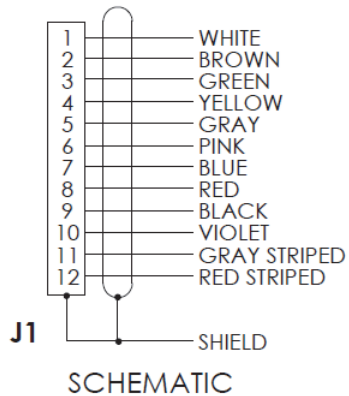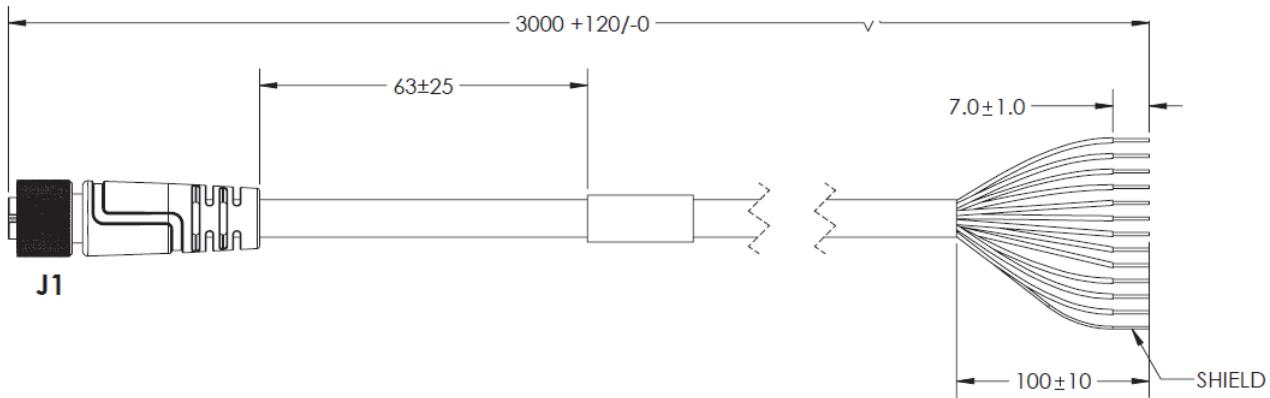



**FEMALE END VIEW (J1)**


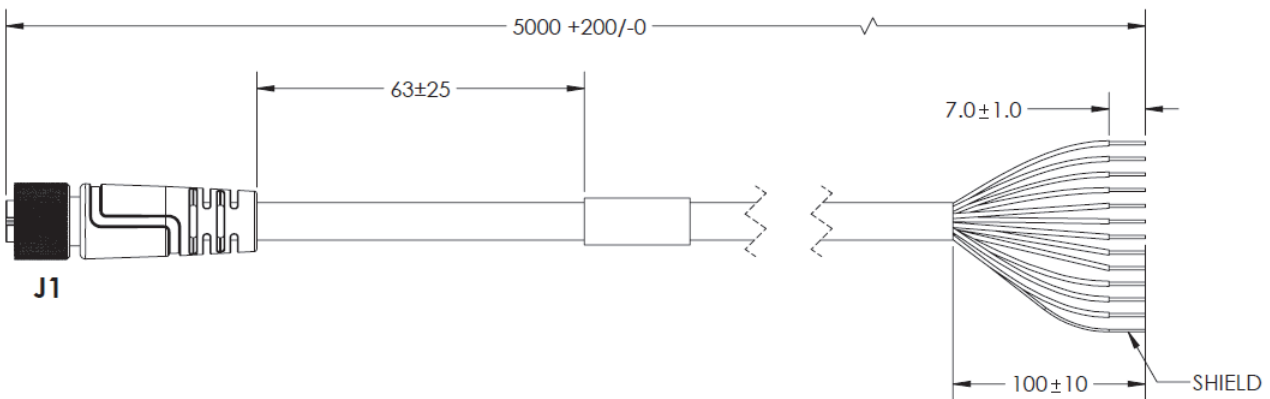



F430-F



M12 to Flying Leads Cable, with Power Filter – 3 Meters or 5 Meters  
V430-W8F-3M  
V430-W8F-5M

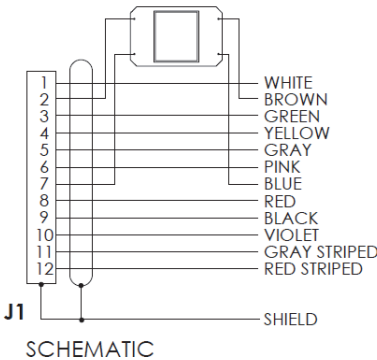

FEMALE END VIEW (J1)

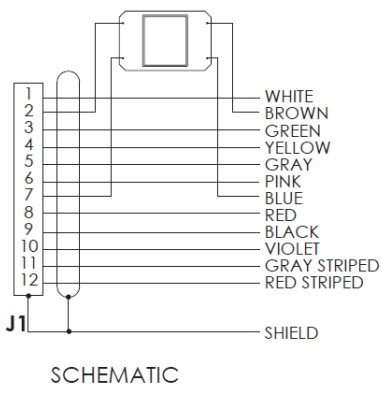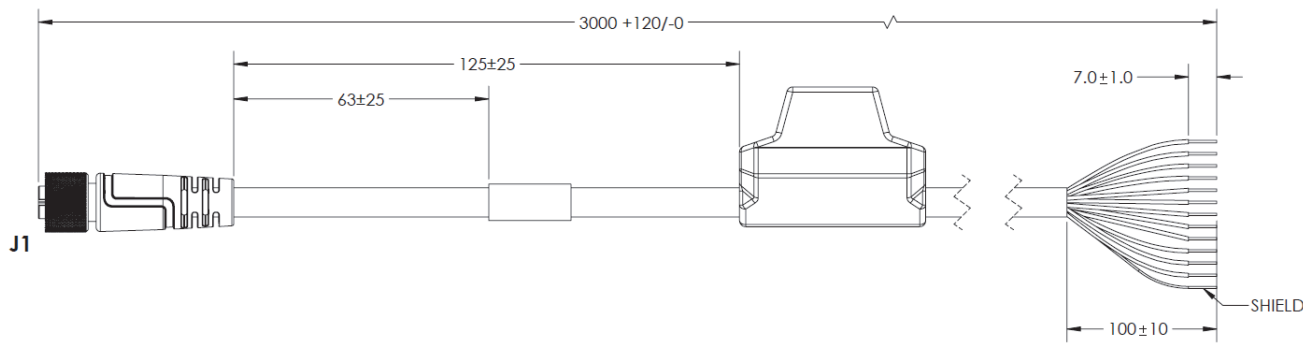





FEMALE END VIEW (J1)

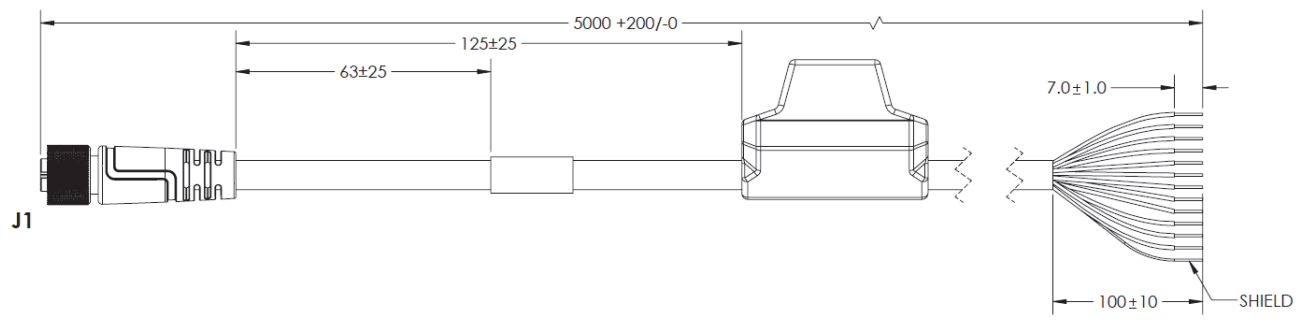


**M12 to Flying Leads Cable Right Angle Up Power, IO, RS232, USB – 3 Meters**  
**V430-W8LU-3M**







\*Right angle up

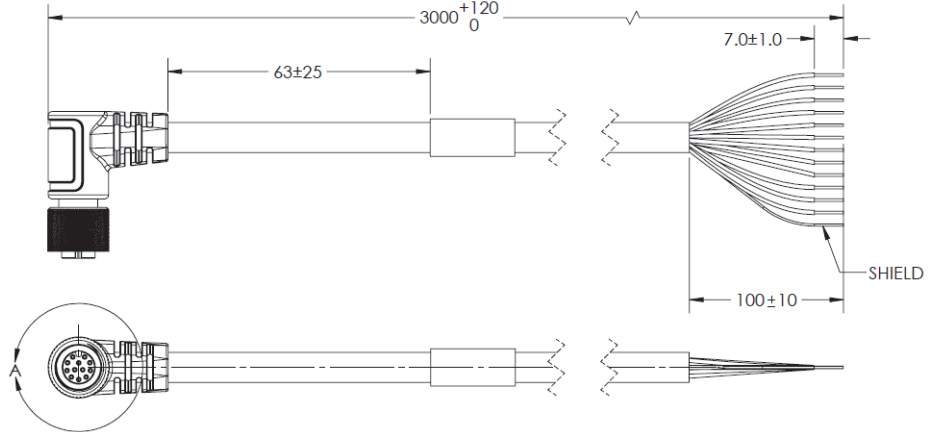

**M12 to Flying Leads Cable Right Angle Up, with Power Filter – 3 Meters**  
**V430-W8LUF-3M**




\*Right angle up

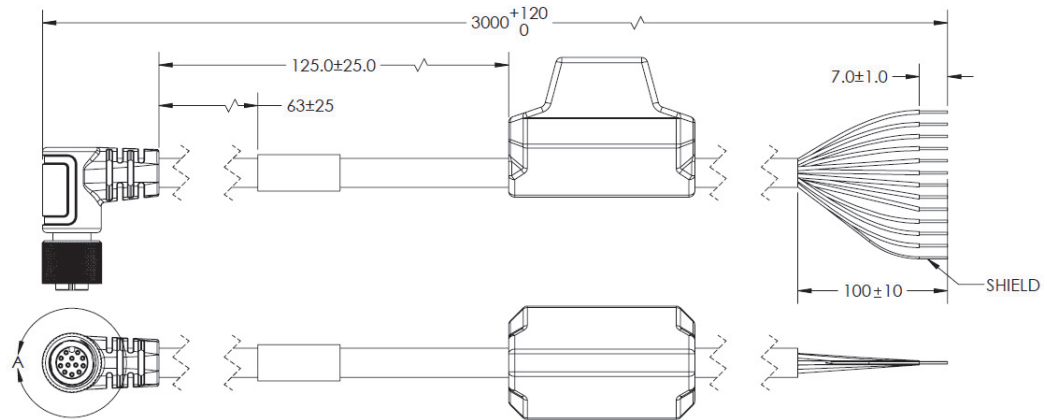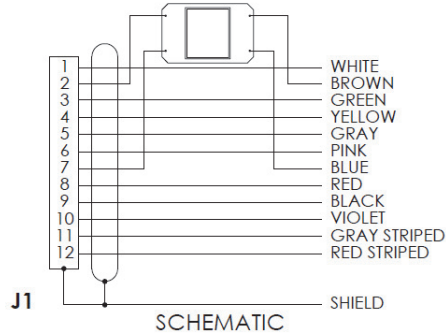


# F430-F


## M12 to Flying Leads Cable Right Angle Down Power, IO, RS232, USB – 3 Meters V430-W8LD-3M




\*Right angle down

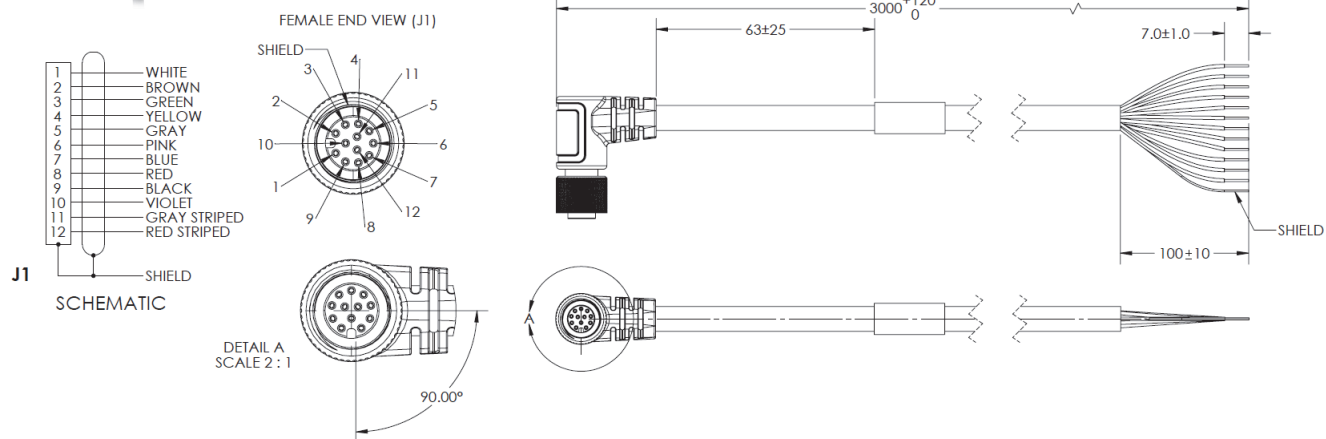


## M12 to Flying Leads Cable Right Angle Down, with Power Filter – 3 Meters V430-W8LDF-3M




\*Right angle down

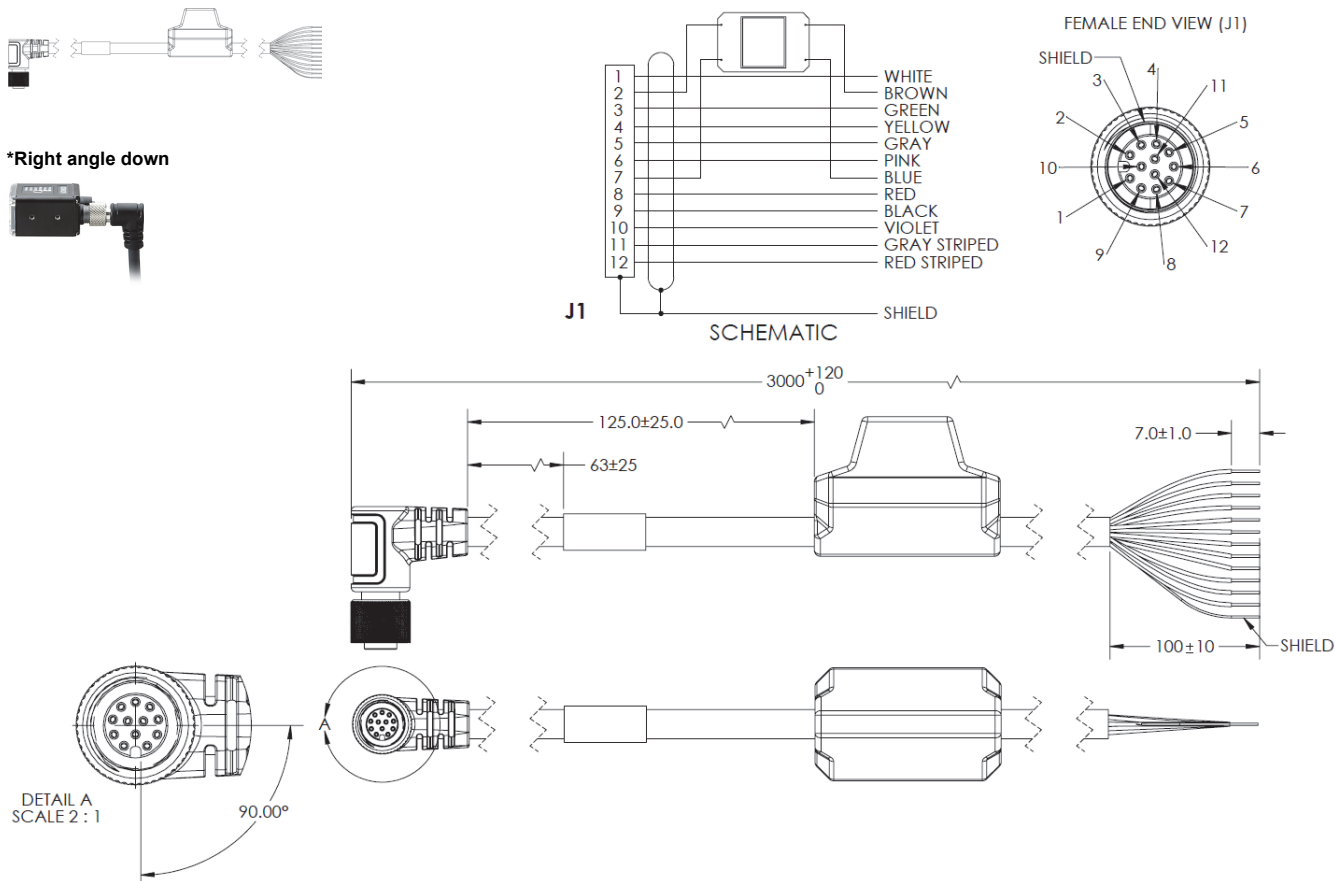




**M12 to RS-232 Breakout – 1 Meter or 3 Meters**  
**V430-WR-1M**  
**V430-WR-3M**

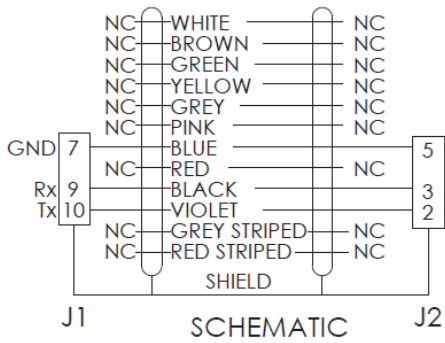


M12 END VIEW (J1)





DB9 END VIEW (J2)

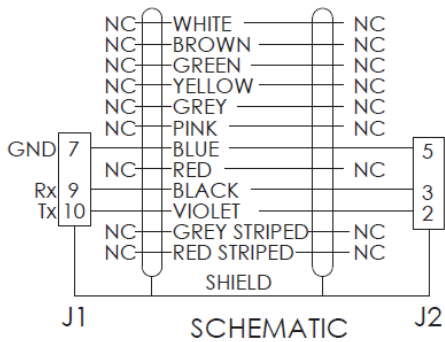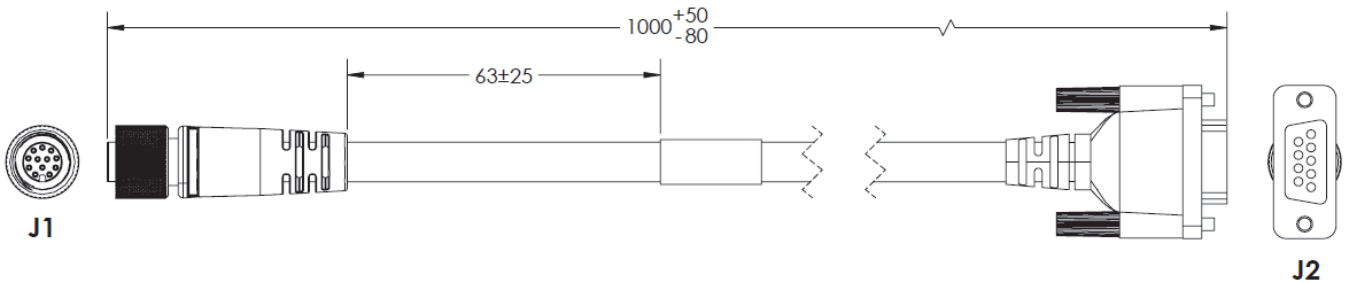


M12 END VIEW (J1)




DB9 END VIEW (J2)

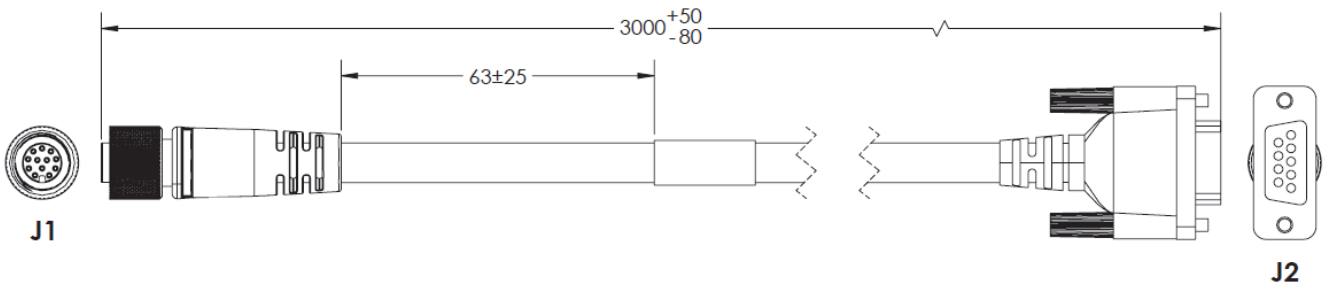

Camera to QX-1 Interconnect Cables with RS-232 Breakout – 2.7 Meters  
V430-WQR-3M

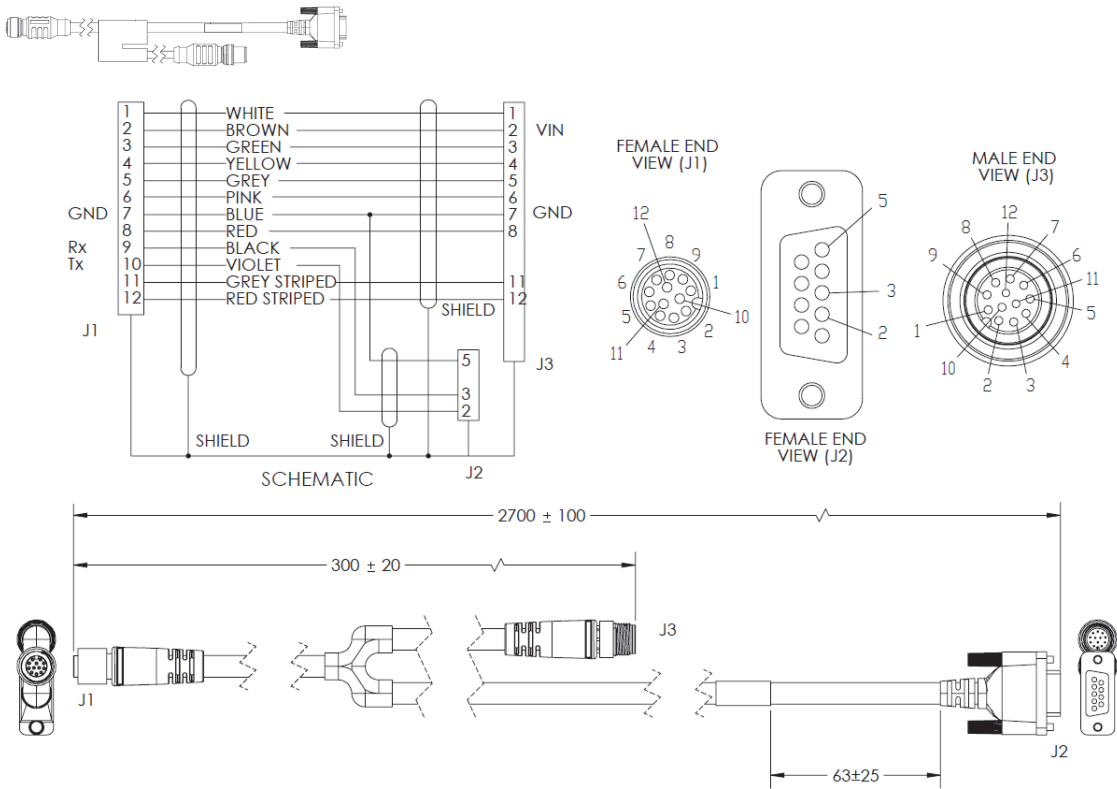


Camera to QX-1 Interconnect Cables with USB Keyboard Wedge Breakout – 2.7 Meters  
V430-WQK-3M

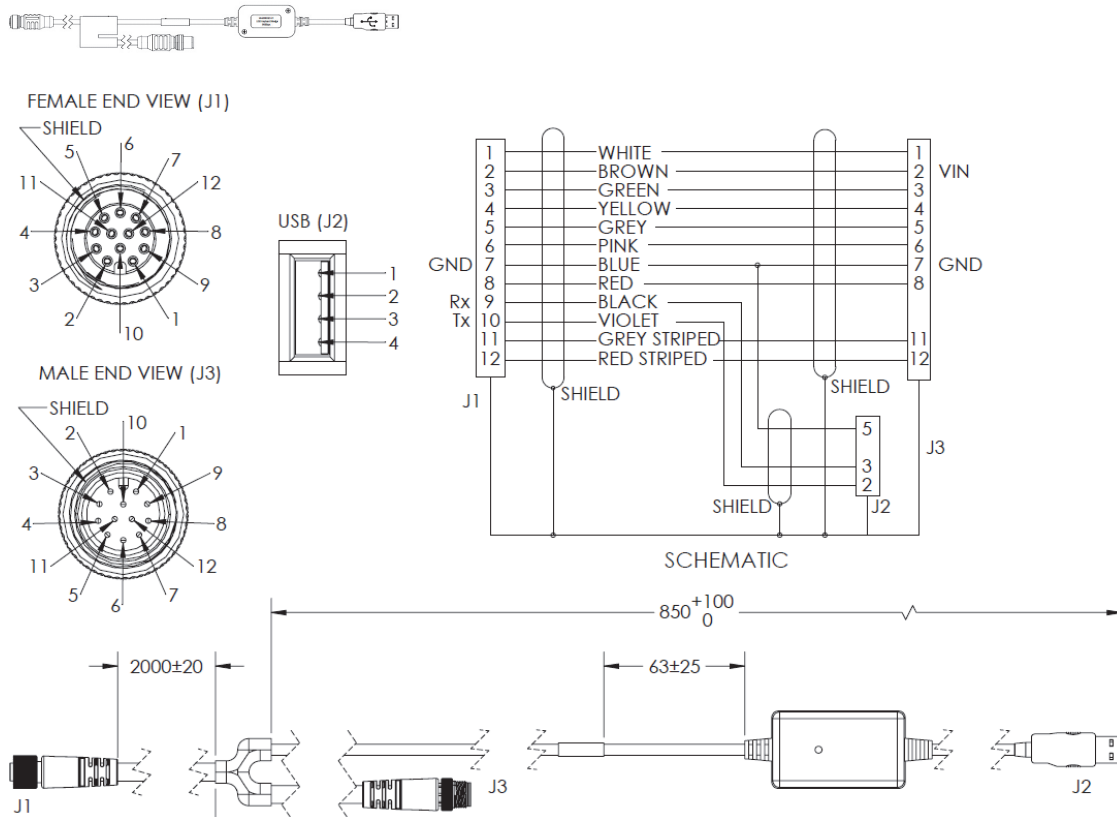





**M12 12-Pin Plug to M12 12-Pin Socket, Right Angle, 3 Meters**  
**61-000148-03**

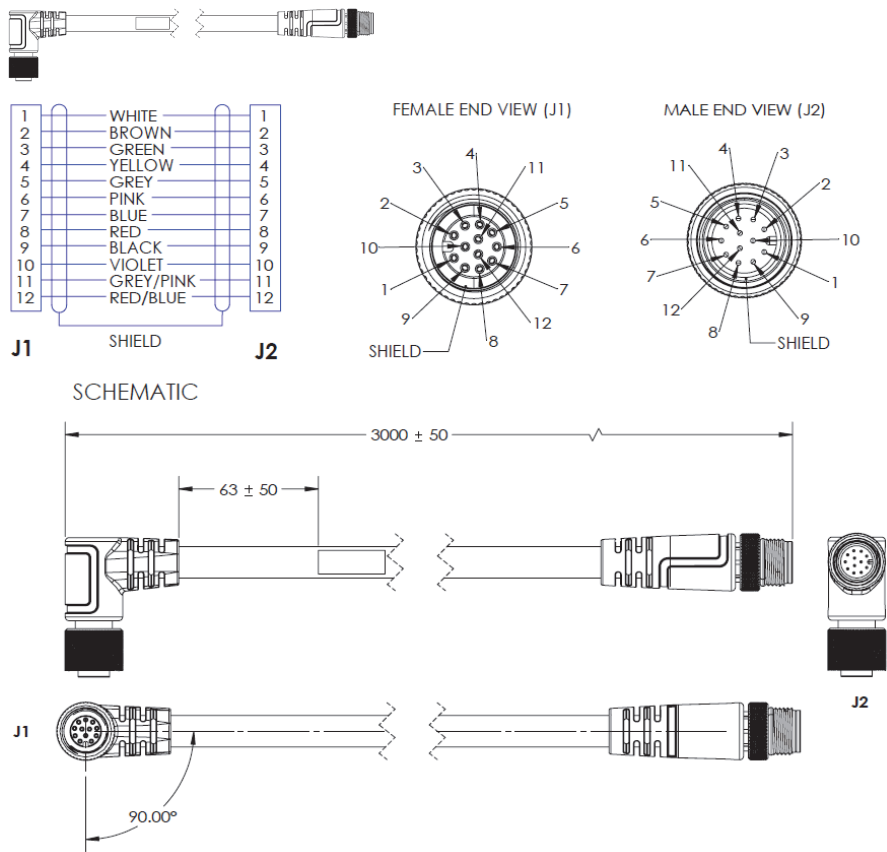


**M12 12-Pin Plug to M12 12-Pin Socket, Right Angle, Alternate Key, 3 Meters**  
**61-000148-04**

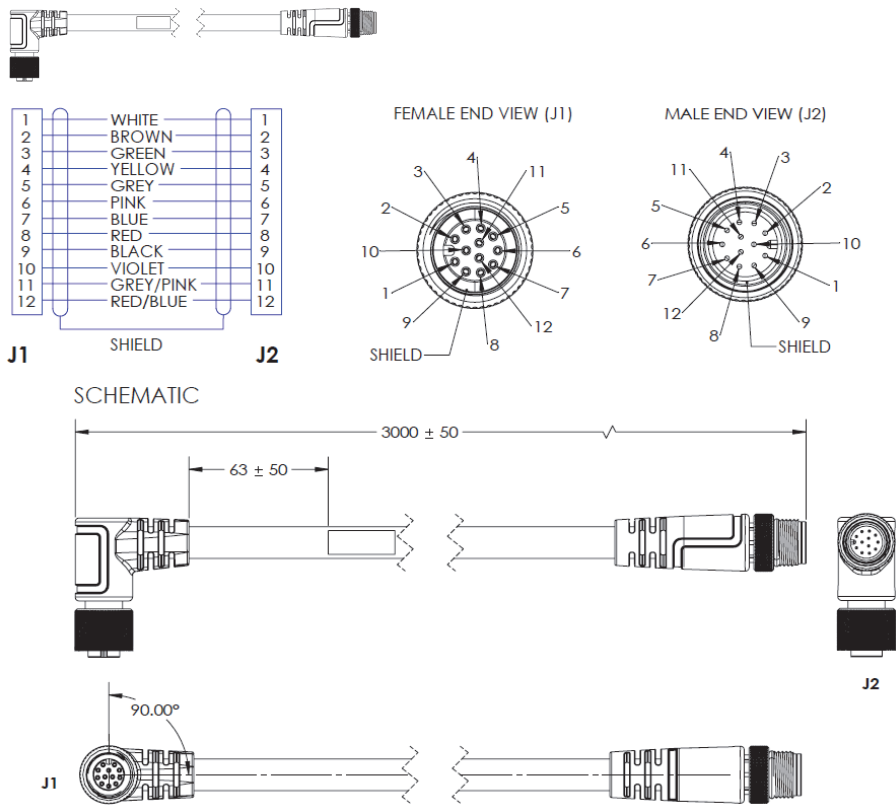

M12 12-Pin Plug to M12 12-Pin Socket, Right Angle, 1 Meter  
61-000162-03

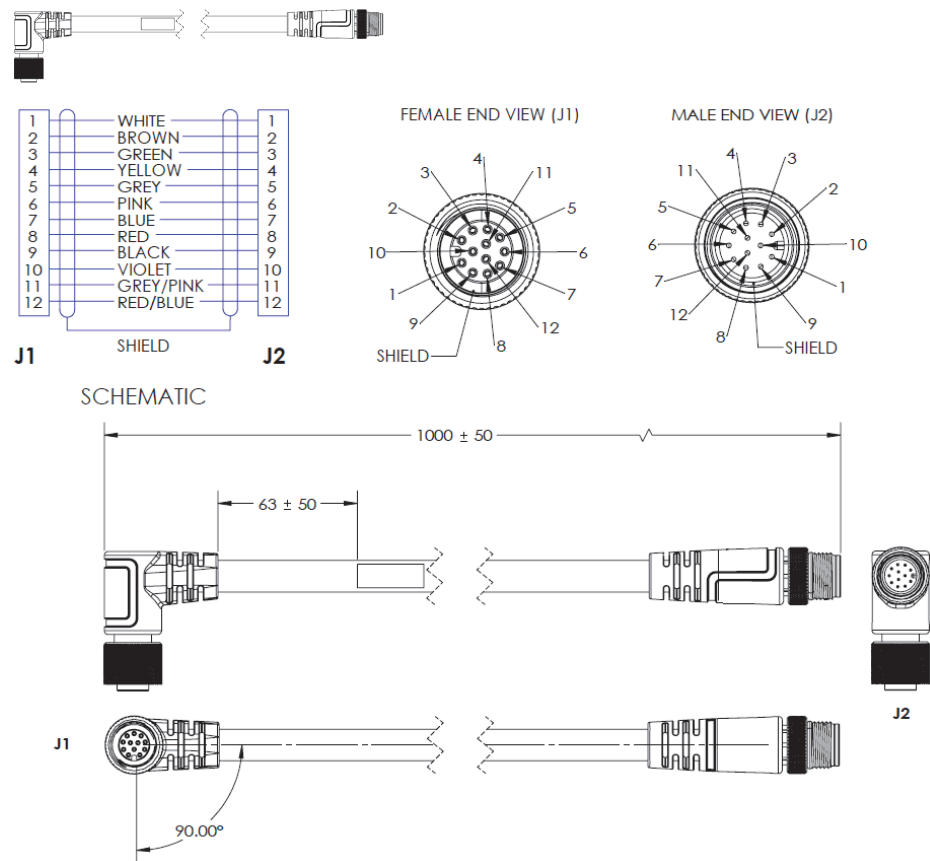

M12 12-Pin Plug to M12 12-Pin Socket, Right Angle, Alternate Key, 1 Meter  
61-000162-04

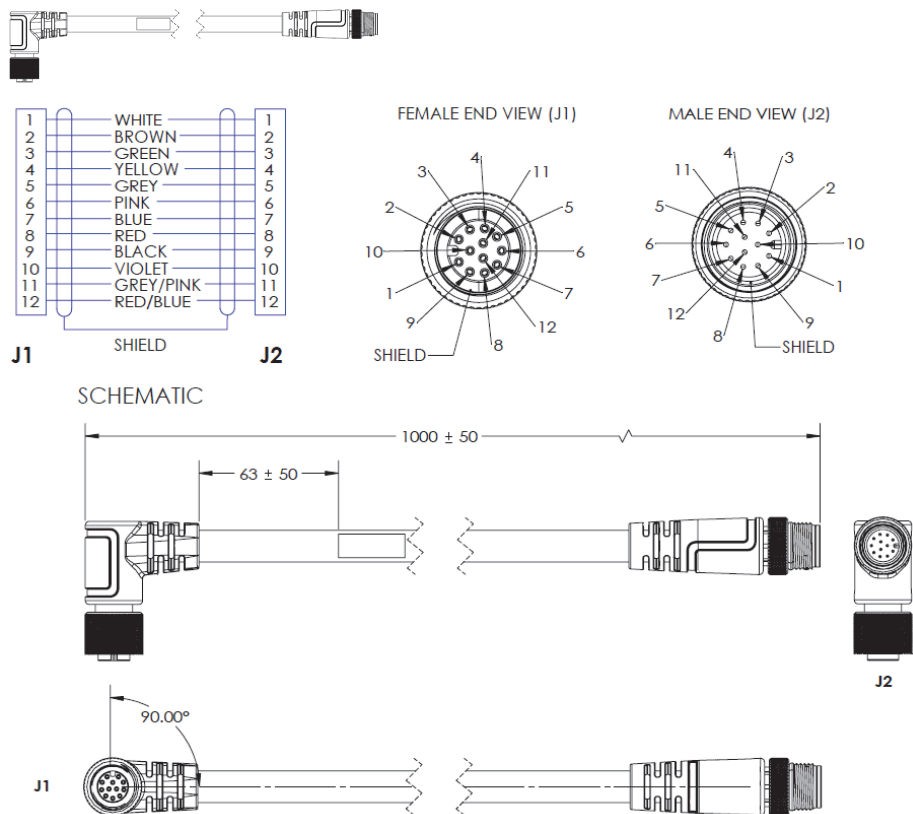

AutoVISION Verification Calibration Card with NIST-Traceable Measurement Report  
98-000265-01  
98-000265-02

OMRON

CALIBRATION CARD

Dimensions and Reflectance

MEASUREMENT

Reflexance (Min.)

Reflexance (Max.)

Symbol 1 Width (X)

Symbol 2 Width (X)

NOMINAL

4%

82%

0.240 IN.

0.480 IN.

ACTUAL (MEASURED)

%

%

IN.

IN.

Dark Cell

Blank Cell

Symbol 1

Symbol 2

Standards: AIM DPM,ISO/IEC 15415, ISO/IEC 15416

Calibration is only traceable to NIST standards when serial number and measured values are included.

SERIAL NUMBER:

P/N: 10-00022-01

OMRON

CALIBRATION CARD

Dimensions and Reflectance

MEASUREMENT

Reflexance (Min.)

Reflexance (Max.)

Symbol 1 Width (X)

Symbol 2 Width (X)

NOMINAL

4%

82%

0.240 IN.

0.480 IN.

ACTUAL (MEASURED)

%

%

IN.

IN.

Dark Cell

Blank Cell

Symbol 1

Symbol 2

Standards: AIM DPM,ISO/IEC 15415, ISO/IEC 15416

Calibration is only traceable to NIST standards when serial number and measured values are included.

SERIAL NUMBER:

P/N: 10-000522-01

Related Manuals

Man.No.	Model	Manual
Z433 (84-9000402-02)	F320-F, F330-F, F420-F, F430-F	MicroHAWK F320-F / F330-F / F420-F / F430-F User Manual

# Terms and Conditions Agreement

## Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

## Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

## Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

## Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

## Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

## Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

- EtherNet/IP™ is a trademark of ODVA.
- QR code is the registered trademark of DENSO WAVE.
- Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.
- The product photographs and figures that are used in this catalog may vary somewhat from the actual products.

Note: Do not use this document to operate the Unit.

**OMRON Corporation** Industrial Automation Company  
Kyoto, JAPAN

Contact: [www.ia.omron.com](http://www.ia.omron.com)

Regional Headquarters  
OMRON EUROPE B.V.  
Wegalaan 67-69, 2132 JD Hoofddorp  
The Netherlands  
Tel: (31)2356-81-300/Fax: (31)2356-81-388

OMRON ELECTRONICS LLC  
2895 Greenspoint Parkway, Suite 200  
Hoffman Estates, IL 60169 U.S.A.  
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.  
No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark,  
Singapore 119967  
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.  
Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2020 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

Cat. No. Q278-E-03 (SP120C-EN-1220)

1220 (0919)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Omron:

[F430-F000M03M-NNA](#) [F430-F000M03M-NNS](#) [F430-F000M03M-NNV](#) [F430-F000M03M-SRA](#) [F430-F000M03M-SRS](#)  
[F430-F000M03M-SRV](#) [F430-F000M03M-SWA](#) [F430-F000M03M-SWS](#) [F430-F000M03M-SWV](#) [F430-F000M03M-](#)  
[SWV-D](#) [F430-F000W03M-NNA](#) [F430-F000W03M-NNS](#) [F430-F000W03M-NNV](#) [F430-F000W03M-SRA](#) [F430-](#)  
[F000W03M-SRS](#) [F430-F000W03M-SRV](#) [F430-F000W03M-SWA](#) [F430-F000W03M-SWS](#) [F430-F000W03M-SWV](#)  
[F430-F050M03M-NNA](#) [F430-F050M03M-NNS](#) [F430-F050M03M-NNV](#) [F430-F050M03M-SRA](#) [F430-F050M03M-SRS](#)  
[F430-F050M03M-SRV](#) [F430-F050M03M-SWA](#) [F430-F050M03M-SWS](#) [F430-F050M03M-SWV](#) [F430-F050W03M-NNA](#)  
[F430-F050W03M-NNS](#) [F430-F050W03M-NNV](#) [F430-F050W03M-SRA](#) [F430-F050W03M-SRS](#) [F430-F050W03M-](#)  
[SRV](#) [F430-F050W03M-SWA](#) [F430-F050W03M-SWS](#) [F430-F050W03M-SWV](#) [F430-F081M03M-NNA](#) [F430-](#)  
[F081M03M-NNS](#) [F430-F081M03M-NNV](#) [F430-F081M03M-SRA](#) [F430-F081M03M-SRS](#) [F430-F081M03M-SRV](#) [F430-](#)  
[F081M03M-SWA](#) [F430-F081M03M-SWS](#) [F430-F081M03M-SWV](#) [F430-F081W03M-NNA](#) [F430-F081W03M-NNS](#)  
[F430-F081W03M-NNV](#) [F430-F081W03M-SRA](#) [F430-F081W03M-SRS](#) [F430-F081W03M-SRV](#) [F430-F081W03M-SWA](#)  
[F430-F081W03M-SWS](#) [F430-F081W03M-SWV](#) [F430-F102M03M-NNA](#) [F430-F102M03M-NNS](#) [F430-F102M03M-](#)  
[NNV](#) [F430-F102M03M-SRA](#) [F430-F102M03M-SRS](#) [F430-F102M03M-SRV](#) [F430-F102M03M-SWA](#) [F430-F102M03M-](#)  
[SWS](#) [F430-F102M03M-SWV](#) [F430-F102W03M-NNA](#) [F430-F102W03M-NNS](#) [F430-F102W03M-NNV](#) [F430-](#)  
[F102W03M-SRA](#) [F430-F102W03M-SRS](#) [F430-F102W03M-SRV](#) [F430-F102W03M-SWA](#) [F430-F102W03M-SWS](#)  
[F430-F102W03M-SWV](#) [F430-F190M03M-NNA](#) [F430-F190M03M-NNS](#) [F430-F190M03M-NNV](#) [F430-F190M03M-SRA](#)  
[F430-F190M03M-SRS](#) [F430-F190M03M-SRV](#) [F430-F190M03M-SWA](#) [F430-F190M03M-SWS](#) [F430-F190M03M-](#)  
[SWV](#) [F430-F190W03M-NNA](#) [F430-F190W03M-NNS](#) [F430-F190W03M-NNV](#) [F430-F190W03M-SRA](#) [F430-](#)  
[F190W03M-SRS](#) [F430-F190W03M-SRV](#) [F430-F190W03M-SWA](#) [F430-F190W03M-SWS](#) [F430-F190W03M-SWV](#)  
[F430-F300M03M-NNA](#) [F430-F300M03M-NNS](#) [F430-F300M03M-NNV](#) [F430-F300M03M-SRA](#) [F430-F300M03M-SRS](#)  
[F430-F300M03M-SRV](#) [F430-F300M03M-SWA](#) [F430-F300M03M-SWS](#) [F430-F300M03M-SWV](#)