High Voltage Transistor PNP Silicon

BSS63LT1G, NSVBSS63LT1G

Features

- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|--|----------------|-------|------|
| Collector - Emitter Voltage | V_{CEO} | -100 | Vdc |
| Collector – Emitter Voltage R_{BE} = 10 k Ω | V_{CER} | -110 | Vdc |
| Collector Current - Continuous | I _C | -100 | mAdc |

THERMAL CHARACTERISTICS

| Characteristic | Symbol | Max | Unit |
|---|-----------------------------------|----------------|-------|
| Total Device Dissipation FR-5 Board, (Note 1) T _A = 25°C | P_D | 225 | mW |
| Derate above 25°C | | 1.8 | mW/°C |
| Thermal Resistance Junction-to-Ambient | $R_{\theta JA}$ | 556 | °C/W |
| Total Device Dissipation Alumina Substrate, (Note 2) | P_{D} | | mW |
| T _A = 25°C Derate above 25°C | | 300 2.4 | mW/°C |
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 417 | °C/W |
| Junction and Storage Temperature | T _J , T _{stg} | –55 to +150 | °C |


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. $FR-5 = 1.0 \times 0.75 \times 0.062$ in.
- 2. Alumina = 0.4 x 0.3 x 0.024 in. 99.5% alumina.



ON Semiconductor®

www.onsemi.com





SOT-23 CASE 318 STYLE 6

MARKING DIAGRAM



BM = Device Code

M = Date Code*

= Pb-Free Package

(Note: Microdot may be in either location)

*Date Code orientation and/or overbar may vary depending upon manufacturing location.

ORDERING INFORMATION

| Device | Package | Shipping [†] |
|--------------|---------------------|-----------------------|
| BSS63LT1G | SOT-23 (Pb-free) | 3000 / Tape & Reel |
| NSVBSS63LT1G | SOT-23 (Pb-free) | 3000 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

BSS63LT1G, NSVBSS63LT1G

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}C$ unless otherwise noted)

| Characteristic | Symbol | Min | Тур | Max | Unit |
|---|----------------------|----------|--------|--------|------|
| OFF CHARACTERISTICS | | | | | |
| Collector – Emitter Breakdown Voltage ($I_C = -100 \mu Adc$) | V _{(BR)CEO} | -100 | - | _ | Vdc |
| Collector – Emitter Breakdown Voltage (I_C = –10 μ Adc, I_E = 0, R_{BE} = 10 $k\Omega$) | V _{(BR)CER} | -110 | _ | _ | Vdc |
| Collector – Base Breakdown Voltage ($I_E = -10 \mu Adc$, $I_E = 0$) | V _{(BR)CBO} | -110 | - | - | Vdc |
| Emitter – Base Breakdown Voltage (I _E = –10 μAdc) | V _{(BR)EBO} | -6.0 | - | - | Vdc |
| Collector Cutoff Current $(V_{CB} = -90 \text{ Vdc}, I_E = 0)$ | I _{CBO} | _ | - | -100 | nAdc |
| Collector Cutoff Current ($V_{CE} = -110 \text{ Vdc}$, $R_{BE} = 10 \text{ k}\Omega$) | I _{CER} | _ | _ | -10 | μAdc |
| Emitter Cutoff Current $(V_{EB} = -6.0 \text{ Vdc}, I_C = 0)$ | I _{EBO} | _ | - | -200 | nAdc |
| ON CHARACTERISTICS | | | | | |
| DC Current Gain ($I_C = -10$ mAdc, $V_{CE} = -1.0$ Vdc) ($I_C = -25$ mAdc, $V_{CE} = -1.0$ Vdc) | h _{FE} | 30 30 | - - | - - | - |
| Collector – Emitter Saturation Voltage ($I_C = -25$ mAdc, $I_B = -2.5$ mAdc) | V _{CE(sat)} | _ | - | -250 | mVdc |
| Base – Emitter Saturation Voltage ($I_C = -25$ mAdc, $I_B = -2.5$ mAdc) | V _{BE(sat)} | _ | - | -900 | mVdc |
| SMALL-SIGNAL CHARACTERISTICS | | | | | |
| Current – Gain – Bandwidth Product (I_C = -25 mAdc, V_{CE} = -5.0 Vdc, f = 20 MHz) | f _T | 50 | 95 | _ | MHz |
| Case Capacitance ($I_E = I_C = 0$, $V_{CB} = -10$ Vdc, $f = 1.0$ MHz) | C _C | - | - | 20 | pF |
| Noise Figure (I _C = -0.2 mA, V _{CE} = -5.0 Vdc, R _g = 2 k Ω , f = 1.0 kHz, BW = 200 Hz) | NF | - | - | 10 | dB |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. FR-5 = 1.0 × 0.75 × 0.062 in.

2. Alumina = 0.4 × 0.3 × 0.024 in. 99.5% alumina.

BSS63LT1G, NSVBSS63LT1G

TYPICAL CHARACTERISTICS

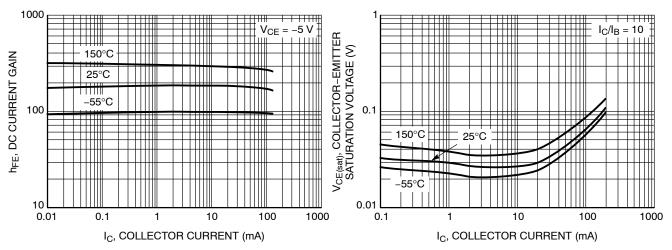


Figure 1. DC Current Gain

Figure 2. Collector-Emitter Saturation Voltage vs. Collector Current

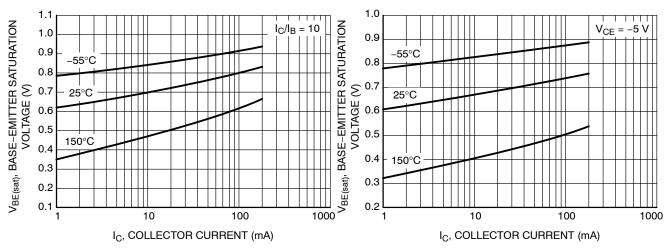


Figure 3. Base-Emitter Saturation Voltage vs. Collector Current

Figure 4. Base-Emitter Voltage vs. Collector Current

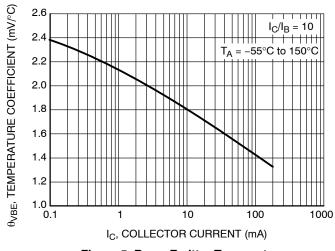


Figure 5. Base–Emitter Temperature Coefficient

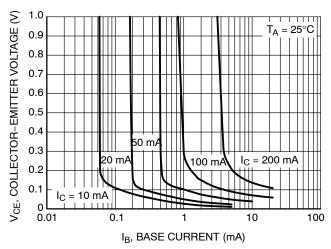


Figure 6. Collector Saturation Region

BSS63LT1G, NSVBSS63LT1G

TYPICAL CHARACTERISTICS

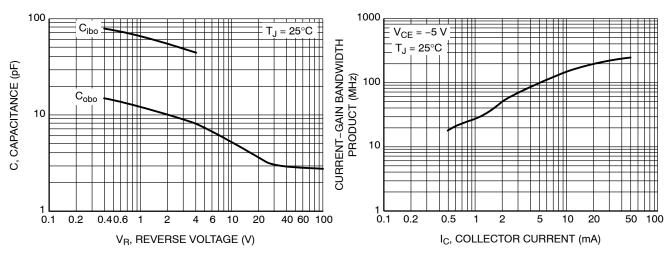


Figure 7. Capacitance

Figure 8. Current-Gain Bandwidth Product

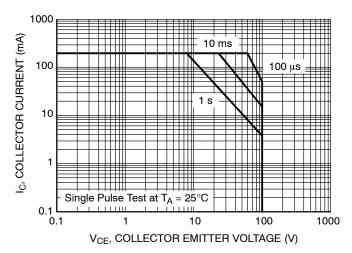


Figure 9. Safe Operating Area

MILLIMETERS

MIN

0.89

0.01

0.37

0.08

2.80

1.20

1.78

0.30

0.35

2.10

O°

NOM

1.00

0.06

0.44

0.14

2.90

1.30

1.90

0.43

0.54

2.40





SOT-23 (TO-236) 2.90x1.30x1.00 1.90P **CASE 318 ISSUE AU**

DATE 14 AUG 2024

MAX

1.11

0.10

0.50

0.20

3.04

1.40

2.04

0.55

0.69

2.64

10°





DETAIL "A" Scale 3:1







NOTES:

DIM

Α

Α1

b

С

D

Ε

е L

L1

HE

Τ

- DIMENSIONING AND TOLERANCING 1. PER ASME Y14.5M, 2018. CONTROLLING DIMENSIONS:
- MILLIMETERS.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE
- BASE MATERIAL.
 DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

GENERIC MARKING DIAGRAM*



XXX = Specific Device Code

= Date Code

= Pb-Free Package

RECOMMENDED MOUNTING FOOTPRINT

* For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

STYLES ON PAGE 2

| DOCUMENT NUMBER: | 98ASB42226B | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | |
|------------------|---|---|-------------|--|
| DESCRIPTION: | PTION: SOT-23 (TO-236) 2.90x1.30x1.00 1.90P | | PAGE 1 OF 2 | |

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

^{*}This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "=", may or may not be present. Some products may not follow the Generic Marking.

SOT-23 (TO-236) 2.90x1.30x1.00 1.90P CASE 318 ISSUE AU

DATE 14 AUG 2024

| STYLE 1 THRU 5: CANCELLED | STYLE 6: PIN 1. BASE 2. EMITTER 3. COLLECTOR | | | |
|---|---|---------------|---|---|
| STYLE 9: PIN 1. ANODE 2. ANODE 3. CATHODE | STYLE 10: PIN 1. DRAIN 2. SOURCE 3. GATE | 2. CATHODE 2. | 2: STYLE 13: CATHODE PIN 1. SOURCE CATHODE 2. DRAIN ANODE 3. GATE | STYLE 14: PIN 1. CATHODE 2. GATE 3. ANODE |
| STYLE 15: PIN 1. GATE 2. CATHODE 3. ANODE | STYLE 16: PIN 1. ANODE 2. CATHODE 3. CATHODE | 2. ANODE 2. | 3: STYLE 19: NO CONNECTION PIN 1. CATHODE CATHODE 2. ANODE ANODE 3. CATHODE-ANODE | STYLE 20: PIN 1. CATHODE 2. ANODE 3. GATE |
| STYLE 21: PIN 1. GATE 2. SOURCE 3. DRAIN | STYLE 22: PIN 1. RETURN 2. OUTPUT 3. INPUT | | | STYLE 26: PIN 1. CATHODE 2. ANODE 3. NO CONNECTION |
| STYLE 27: PIN 1. CATHODE 2. CATHODE 3. CATHODE | STYLE 28: PIN 1. ANODE 2. ANODE 3. ANODE | | | |

| DOCUMENT NUMBER: | 98ASB42226B Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | |
|------------------|--|--|-------------|
| DESCRIPTION: | SOT-23 (TO-236) 2.90x1.30x1.00 1.90P | | PAGE 2 OF 2 |

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

BSS63LT1 BSS63LT1G NSVBSS63LT1G