

Zener ESD Protection Diode

Dual Common Anode Zeners for ESD Protection

DF3A6.8FUT1

These dual monolithic silicon zener diodes are designed for applications requiring transient overvoltage protection capability. They are intended for use in voltage and ESD sensitive equipment such as computers, printers, business machines, communication systems, medical equipment and other applications. Their dual junction common anode design protects two separate lines using only one package. These devices are ideal for situations where board space is at a premium.

Features

- Pb-Free Package is Available
- SC-70 Package Allows Two Separate Unidirectional Configurations
- Low Leakage < 1.0 μ A @ 5.0 V
- Breakdown Voltage: 6.4–7.2 V @ 5.0 mA
- ESD Protection Meeting: 16 kV Human Body Model
30 kV Contact = IEC61000–4–2
- Peak Power: 24 W @ 1.0 ms (Unidirectional), per Figure 1
- Peak Power: 150 W @ 20 μ s (Unidirectional), per Figure 2

Mechanical Characteristics



- Void Free, Transfer-Molded, Thermosetting Plastic Case
- Corrosion Resistant Finish, Easily Solderable
- Package Designed for Optimal Automated Board Assembly
- Small Package Size for High Density Applications

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Steady State Power Dissipation Derate above 25°C (Note 1)	P_D	200 1.6	mW mW/°C
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	618	°C/W
Operating Junction and Storage Temperature Range	T_J, T_{stg}	– 55 to +150	°C
Peak Power Dissipation @ 1.0 ms (Note 2) @ $T_A = 25^\circ\text{C}$	P_{PK}	20	W
Peak Power Dissipation @ 20 μ s (Note 3) @ $T_A = 25^\circ\text{C}$	P_{PK}	150	W
ESD Discharge MIL STD 883C – Method 3015–6 IEC61000–4–2, Air Discharge IEC61000–4–2, Contact Discharge	V_{PP}	16 30 30	kV


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- Mounted on FR-5 Board = 1.0 X 0.75 X 0.062 in.
- Non-repetitive pulse per Figure 1.
- Non-repetitive pulse per Figure 2.



SC-70/SOT-323
CASE 419
STYLE 4

MARKING DIAGRAM



68 = Specific Device Code
M = Date Code

ORDERING INFORMATION

Device	Package	Shipping [†]
DF3A6.8FUT1G	SC-70 (Pb-Free)	3000 / Tape & Reel

DISCONTINUED (Note 1)

DF3A6.8FUT1	SC-70	3000 / Tape & Reel
-------------	-------	-----------------------

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

- DISCONTINUED:** This device is not recommended for new design. Please contact your onsemi representative for information. The most current information on this device may be available on www.onsemi.com.

Preferred devices are recommended choices for future use and best overall value.


DF3A6.8FUT1

ELECTRICAL CHARACTERISTICS

($T_A = 25^\circ\text{C}$ unless otherwise noted)

UNIDIRECTIONAL (Circuit tied to Pins 1 and 3 or 2 and 3)

Symbol	Parameter
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F
Z_{ZT}	Maximum Zener Impedance @ I_{ZT}
Z_{ZK}	Maximum Zener Impedance @ I_{ZK}

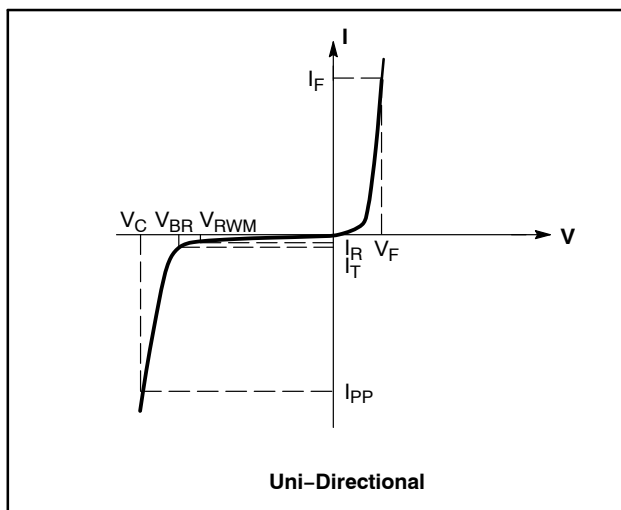

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

UNIDIRECTIONAL (Circuit tied to Pins 1 and 3 or 2 and 3)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F = 10\text{ mA}$	–	0.8	0.9	V
Zener Voltage (Note 4)	V_Z	$I_{ZT} = 5\text{ mA}$	6.4	6.8	7.2	V
Operating Resistance (Note 5)	Z_{ZK}	$I_{ZK} = 0.5\text{ mA}$	–	–	200	Ω
	Z_{ZT}	$I_{ZT} = 5\text{ mA}$	–	–	50	Ω
Reverse Current	I_{R1}	$V_{RWM} = 5\text{ V}$	–	–	0.5	μA
Clamping Voltage	V_C	$I_{PP} = 2.0\text{ A}$ (Figure 1)	–	–	9.6	V
		$I_{PP} = 9.37\text{ A}$ (Figure 2)	–	–	16	V
ESD Protection						kV
Human Body Model (HBM)			–	–	16	
Contact – IEC61000–4–2			–	–	30	
Air Discharge			–	–	30	

4. V_Z measured at pulse test current I_{ZT} at an ambient temperature of 25°C .

5. Z_{ZT} and Z_{ZK} is measured by dividing the AC voltage drop across the device by the AC current supplied. AC frequency = 1.0 kHz.

TYPICAL CHARACTERISTICS

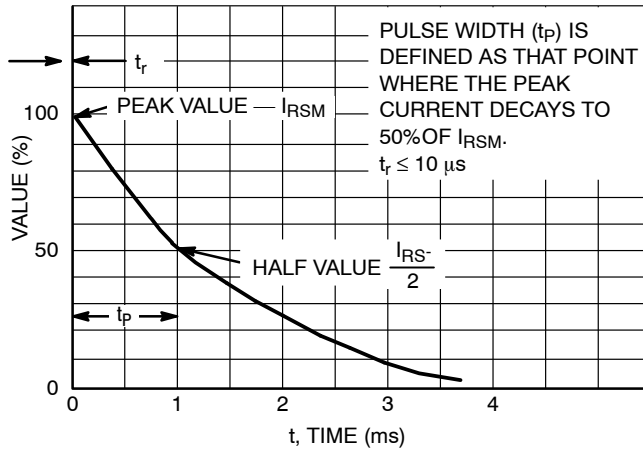


Figure 1. 10 × 1000 μ s Pulse Waveform

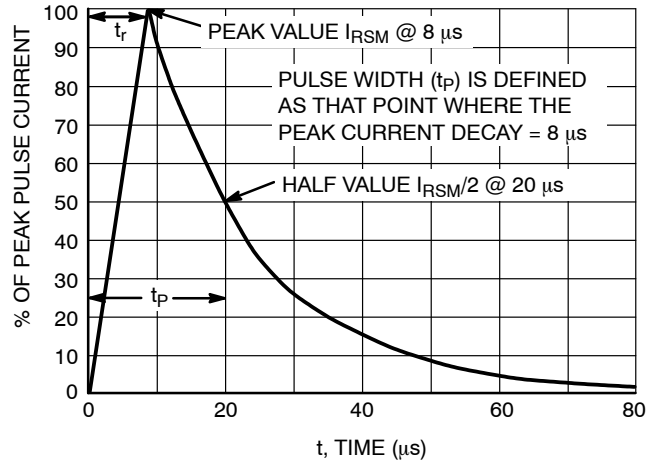


Figure 2. 8 × 20 μ s Pulse Waveform

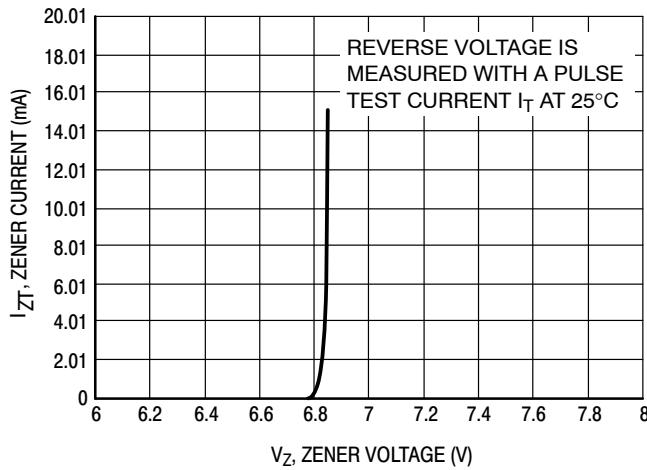


Figure 3. Zener Voltage vs. Zener Current

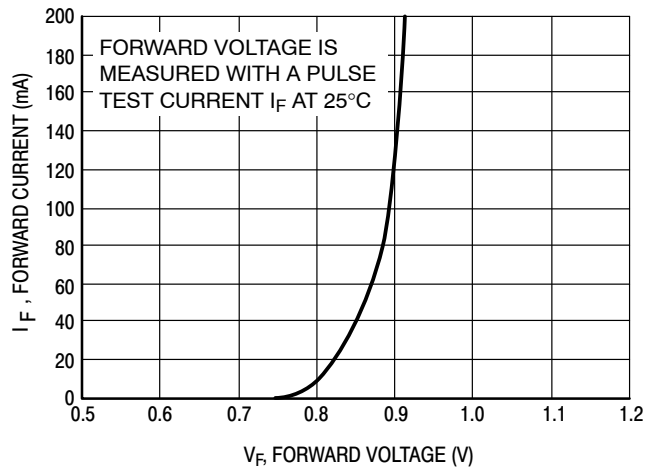


Figure 4. Forward Voltage vs. Forward Current

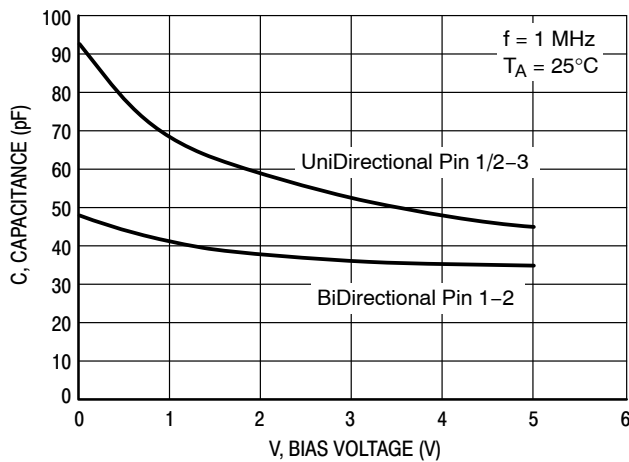


Figure 5. Capacitance vs. Bias Voltage


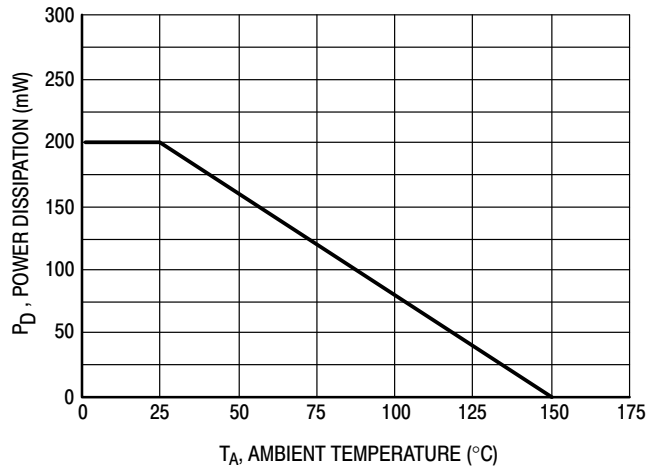



Figure 6. Steady State Power Derating Curve



SCALE 4:1

SC-70 (SOT-323)
CASE 419
ISSUE R

DATE 11 OCT 2022

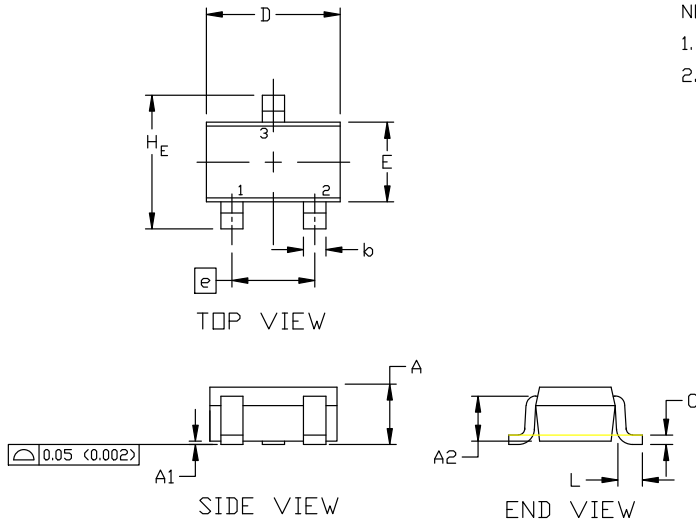


NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH


DIM	MILLIMETERS			INCHES		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.80	0.90	1.00	0.032	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A2	0.70 REF			0.028 BSC		
b	0.30	0.35	0.40	0.012	0.014	0.016
c	0.10	0.18	0.25	0.004	0.007	0.010
D	1.80	2.00	2.20	0.071	0.080	0.087
E	1.15	1.24	1.35	0.045	0.049	0.053
e	1.20	1.30	1.40	0.047	0.051	0.055
e1	0.65 BSC			0.026 BSC		
L	0.20	0.38	0.56	0.008	0.015	0.022
H _E	2.00	2.10	2.40	0.079	0.083	0.095

GENERIC
MARKING DIAGRAM



XX = Specific Device Code
M = Date Code
▪ = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

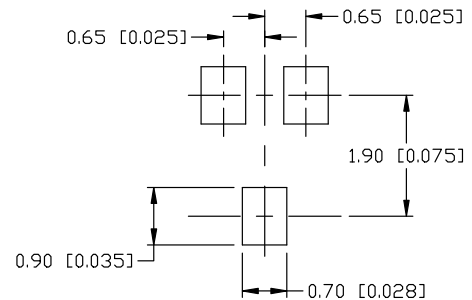

* For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

SOLDERING FOOTPRINT

STYLE 1:
CANCELLED

STYLE 2:
PIN 1. ANODE
2. N.C.
3. CATHODE

STYLE 3:
PIN 1. BASE
2. EMITTER
3. COLLECTOR

STYLE 4:
PIN 1. CATHODE
2. CATHODE
3. ANODE

STYLE 5:
PIN 1. ANODE
2. ANODE
3. CATHODE

STYLE 6:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

STYLE 7:
PIN 1. BASE
2. EMITTER
3. COLLECTOR

STYLE 8:
PIN 1. GATE
2. SOURCE
3. DRAIN

STYLE 9:
PIN 1. ANODE
2. CATHODE
3. CATHODE-ANODE

STYLE 10:
PIN 1. CATHODE
2. ANODE
3. ANODE-CATHODE

STYLE 11:
PIN 1. CATHODE
2. CATHODE
3. CATHODE

DOCUMENT NUMBER:	98ASB42819B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	SC-70 (SOT-323)	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[onsemi:](#)

[DF3A6.8FUT1](#) [DF3A6.8FUT1G](#) [SZDF3A6.8FUT1G](#)