# Ultra-Low VF Schottky Rectifier, 12 A, 100 V

# **FSV12100V**

#### **Features**

- Ultra-Low Forward Voltage Drop
- Low Thermal Resistance
- Very Low Profile: Typical Height of 1.1 mm
- Trench Schottky Technology
- Green Molding Compound as per IEC61249 Standard
- Non-DAP Option Only
- These Devices are Pb–Free, Halogen Free Free and are RoHS Compliant

# **Specifications**

## **ABSOLUTE MAXIMUM RATINGS** (T<sub>A</sub> = 25°C unless otherwise noted)


Symbol	Rating	Value	Unit
$V_{RRM}$	Peak Repetitive Reverse Voltage	100	V
$V_{RWM}$	Working Peak Reverse Voltage	100	V
V <sub>RMS</sub>	RMS Reverse Voltage	70	V
V <sub>R</sub>	DC Blocking Voltage	100	V
I <sub>F(AV)</sub>	Average Rectified Peak Forward Surge Current	12	Α
I <sub>FSM</sub>	Non–Repetitive Peak Forward Surge Current	220	Α
$T_J$	Operating Junction Temperature Range	-55 to +150	°C
T <sub>STG</sub>	Storage Temperature Range	-55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



# ON Semiconductor®

### www.onsemi.com





## **MARKING DIAGRAM**



\$Y = ON Semiconductor Logo &Z = Assembly Plant Code &3 = Date Code (Year & Week) FSV12100V = Specific Device Code

#### ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

# THERMAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted) (Note 1)

Symbol	Characteristic	Minimum Land Pattern	Maximum Land Pattern	Unit
$R_{\theta JA}$	Junction-to-Ambient Thermal Resistance	100	40	°C/W
$\Psi_{JL}$	Junction-to-Lead Thermal Characteristics, Thermocouple Soldered to Anode	15	12	°C/W
,	Junction-to-Lead Thermal Characteristics, Thermocouple Soldered to Cathode	6	5	

<sup>1.</sup> The thermal resistances (R<sub>0,JA</sub> & Ψ<sub>JL</sub>) are characterized with device mounted on the following FR4 printed circuit boards, as shown in Figure 1 and Figure 2. PCB size: 76.2 x 114.3 mm. Minimum land pattern size: 4.9 x 4.8 mm (big pattern, x1), 1.4 x 1.52 mm (small pattern, x2). Maximum land pattern size: 30 x 30 mm (pattern, x2). Force line trace size = 55 mils, sense line trace size = 4 mils.






Figure 1. Minimum Land Pattern of 2 oz Copper

Figure 2. Maximum Land Pattern of 2 oz Copper

# **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
$BV_R$	Breakdown Voltage	I <sub>R</sub> = 0.5 mA	100	-	-	V
V <sub>F</sub>	Forward Voltage Drop	I <sub>F</sub> = 5 A	-	0.485	-	V
		I <sub>F</sub> = 5 A, T <sub>A</sub> = 125°C	-	0.418	-	
		I <sub>F</sub> = 12 A	-	0.598	0.670	
		I <sub>F</sub> = 12 A, T <sub>A</sub> = 125°C	-	0.564	0.600	
I <sub>R</sub>	Reverse Current	V <sub>R</sub> = 70 V	-	0.0084	-	mA
		V <sub>R</sub> = 70 V, T <sub>A</sub> = 125°C	-	9.485	-	
		V <sub>R</sub> = 100 V	-	0.0225	0.10	
		V <sub>R</sub> = 100 V, T <sub>A</sub> = 125°C	-	16.56	20	
CJ	Junction Capacitance	V <sub>R</sub> = 4 V, f = 1 MHz	-	1124	-	pF
T <sub>rr</sub>	Reverse Recovery Time	$I_F = 0.5 \text{ A}, I_R = 1 \text{ A}, I_{rr} = 0.25 \text{ A}$	-	27.33	-	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

## **ORDERING INFORMATION**

Part Number	Top Mark	Package	Shipping <sup>†</sup>
FSV12100V	FSV12100V	TO-277 3L (Pb-Free/Halogen Free)	5000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# **FSV12100V**

# TYPICAL PERFORMANCE CHARACTERISTICS

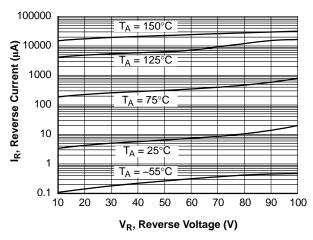
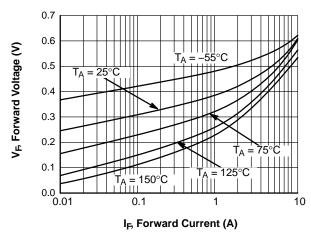
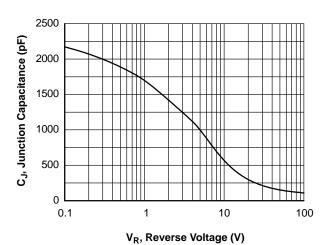


Figure 3. Typical Reverse Characteristics



**Figure 4. Typical Forward Characteristics** 



**Figure 5. Typical Junction Capacitance** 

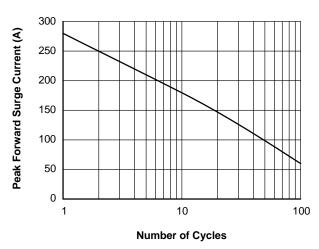


Figure 6. Maximum Non-Repetitive Peak Forward Surge Current


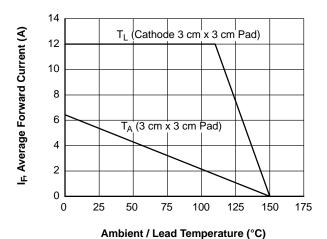


Figure 7. Forward Current Derating Curve



**DATE 30 SEP 2016** 

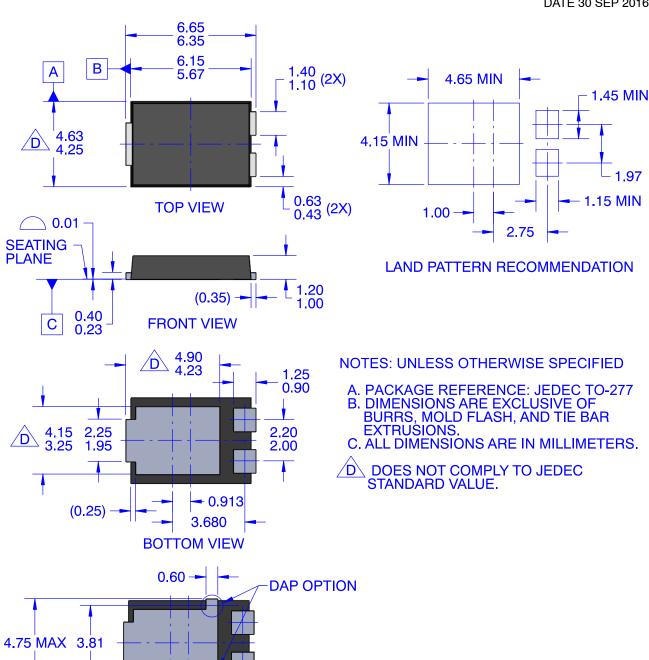

	DOCUMENT NUMBER: 98AON13861G		Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
ſ	DESCRIPTION:	TO-277-3LD		PAGE 1 OF 1	

**BOTTOM VIEW - DAP OPTION** 

ON Semiconductor and un are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi: FSV12100V