onsemi

MARKING

TinyLogic HS 2-Input NAND Gate

NC7S00

Description

The NC7S00 is a single 2–Input high performance CMOS NAND Gate. Advanced Silicon Gate CMOS fabrication assures high speed and low power circuit operation over a broad V_{CC} range. ESD protection diodes inherently guard both inputs and output with respect to the V_{CC} and GND rails. Three stages of gain between inputs and output assures high noise immunity and reduced sensitivity to input edge rate.

Features

- Space Saving SC-74A and SC-88A 5-Lead Package
- Ultra Small MicroPak[™] Leadless Package
- High Speed: $t_{PD} = 3.5$ ns Typ
- Low Quiescent Power: $I_{CC} < 1 \mu A$
- Balanced Output Drive: 2 mA I_{OL}, -2 mA I_{OH}
- Broad V_{CC} Operating Range: 2 V 6 V
- Balanced Propagation Delays
- Specified for 3 V Operation
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant






Figure 1. Logic Symbol

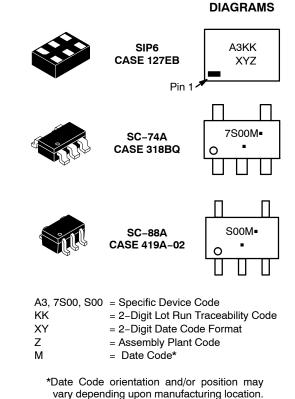


ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 5 of this data sheet.

Pin Configurations





PIN DESCRIPTIONS

Pin Names	Description
A, B	Inputs
Y	Output
NC	No Connect




Figure 3. MicroPak (Top Through View)

FUNCTION TABLE $(Y = \overline{AB})$

Inp	Output	
А	В	Y
L	L	Н
L	Н	Н
Н	L	Н
Н	Н	L

H = HIGH Logic Level L = LOW Logic Level

Symbol	Parameter	Min	Max	Unit	
V _{CC}	Supply Voltage		-0.5	6.5	V
Ι _{ΙΚ}	DC Input Diode Current	V _{IN} < 0 V	-	-20	mA
		$V_{IN} > V_{CC}$	-	+20	
V _{IN}	DC Input Voltage	•	-0.5	V _{CC} + 0.5	V
Ι _{ΟΚ}	DC Output Diode Current	V _{OUT} < 0 V	-	-20	mA
		V _{OUT} > V _{CC}	-	+20	
V _{OUT}	DC Output Voltage		-0.5	V _{CC} + 0.5	V
I _{OUT}	DC Output Source or Sink Current		-	±12.5	mA
I_{CC} or I_{GND}	DC V _{CC} or Ground Current per Output Pin		-	±25	mA
T _{STG}	Storage Temperature		-65	+150	°C
TJ	Junction Temperature		-	+150	°C
ΤL	Lead Temperature (Soldering, 10 Seconds)		-	+260	°C
PD	Power Dissipation in Still Air SC-74A		-	390	mW
		SC-88A	-	332	
		MicroPak-6	-	812	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

ABSOLUTE MAXIMUM RATINGS

NC7S00

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Conditions	Min	Мах	Unit
V _{CC}	Supply Voltage		2.0	6.0	V
V _{IN}	Input Voltage		0	V _{CC}	V
V _{OUT}	Output Voltage		0	V _{CC}	V
T _A	Operating Temperature		-40	+85	°C
t _r , t _f	t _r , t _f Input Rise and Fall Times	V _{CC} at 2.0 V	0	20	ns
		V _{CC} at 3.0 V	0	20	
		V _{CC} at 4.5 V	0	10	
		V _{CC} at 6.0 V	0	5	
θ_{JA}	Thermal Resistance	SC-74A	-	320	°C/W
		SC-88A	-	377	
		MicroPak-6	-	154	

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability. 1. Unused inputs must be held HIGH or LOW. They may not float.

DC ELECTICAL CHARACTERISTICS


					مT	= +25	°C	T _A = -40	to +85°C		
Symbol	Parameter	V _{CC} (V)	Cor	nditions	Min	Тур	Max	Min	Max	Unit	
VIH	HIGH Level Input Voltage	2.0				-	-	1.50	-	V	
		3.0 – 6.0			$0.7 \times V_{CC}$	-	-	$0.7 \times V_{CC}$	-		
V _{IL}	LOW Level Input Voltage	2.0			-	-	0.50	-	0.50	V	
		3.0 – 6.0			-	-	$0.3 \times V_{CC}$	-	$0.3 \times V_{CC}$		
V _{OH}	HIGH Level Output Voltage	2.0	I _{OH} = -20	I _{OH} =20 μA,		2.0	-	1.90	-	V	
		3.0	$V_{IN} = V_{IH} c$	or V _{IL}	2.90	3.0	-	2.90	-		
		4.5			4.40	4.5	-	4.40	-		
					5.90	6.0	-	5.90	-		
		3.0	V _{IN} = V _{IH} or V _{IL}	V _{IN} = V _{IH} or V _{IL}	I _{OH} = -1.3 mA	2.68	2.85	-	2.63	-	
		4.5			or v _{IL}	I _{OH} = -2 mA	4.18	4.35	-	4.13	-
		6.0		I _{OH} = -2.6 mA	5.68	5.85	-	5.63	-		
V _{OL}	LOW Level Output Voltage	2.0	l _{OL} = 20 μ/		-	0.0	0.10	-	0.10	V	
		3.0	$V_{IN} = V_{IH}$	or V _{IL}	-	0.0	0.10	-	0.10		
		4.5			-	0.0	0.10	-	0.10		
		6.0			-	0.0	0.10	-	0.10		
		3.0	$V_{IN} = V_{IH}$	I _{OH} = 1.3 mA	-	0.1	0.26	-	0.33		
	4.5	4.5	or V _{IL}	I _{OL} = 2 mA	_	0.1	0.26	_	0.33		
		6.0	1	I _{OL} = 2.6 mA	_	0.1	0.26	_	0.33		
I _{IN}	Input Leakage Current	6.0	$V_{IN} = V_{CC}$	GND	_	-	±0.1	_	±1.0	μA	
I _{CC}	Quiescent Supply Current	6.0	$V_{IN} = V_{CC}$	GND	-	-	1.0	-	10.0	μA	

AC ELECTRICAL CHARACTERISTICS

				T _A = +25°C		;	T _A = -40	to +85°C	
Symbol	Parameter	V _{CC} (V)	Conditions	Min	Тур	Max	Min	Max	Unit
t _{PLH} , t _{PHL}	Propagation Delay (Figure 4, 6)	5.0	C _L = 15 pF	-	3.5	15	-	-	ns
		2.0	C _L = 50 pF	-	19	100	-	125	
		3.0		_	10.5	27	-	35	
		4.5		_	7.5	20	-	25	
		6.0		_	6.5	17	-	21	
t _{TLH} , t _{THL}	Output Transition Time	5.0	C _L = 15 pF	-	3.0	10	-	-	ns
	(Figure 4, 6)	2.0	C _L = 50 pF	-	25	125	-	155	
		3.0		_	16	35	-	45	
		4.5		_	11	25	-	31	
		6.0		_	9	21	-	26	
C _{IN}	Input Capacitance	Open		-	2	10	-	10	pF
C _{PD}	Power Dissipation Capacitance (Figure 5)	5.0	(Note 2)	-	6	-	-	-	pF


2. C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle. C_{PD} is related to I_{CCD} dynamic operating current by the expression: I_{CCD} = (C_{PD}) (V_{CC}) (f_{IN}) + (I_{CC}static).

AC Loading and Waveforms



 C_L includes load and stray capacitance Input PRR = 1.0 MHz, t_W = 500 ns

Figure 4. AC Test Circuit



Input = AC Waveform; PRR = Variable; Duty Cycle = 50%.

Figure 5. I_{CCD} Test Circuit

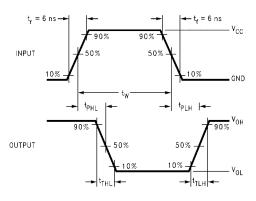


Figure 6. AC Waveforms

NC7S00

DEVICE ORDERING INFORMATION

Device	Top Mark	Packages	Shipping [†]
NC7S00M5X	7S00	SC-74A	3000 / Tape & Reel
NC7S00P5X	S00	SC-88A	3000 / Tape & Reel
NC7S00P5X-L22057	S00	SC-88A	3000 / Tape & Reel
NC7S00L6X	A3	SIP6, MicroPak	5000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

MicroPak is trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.




SIP6 1.45X1.0 CASE 127EB ISSUE O

DATE 31 AUG 2016





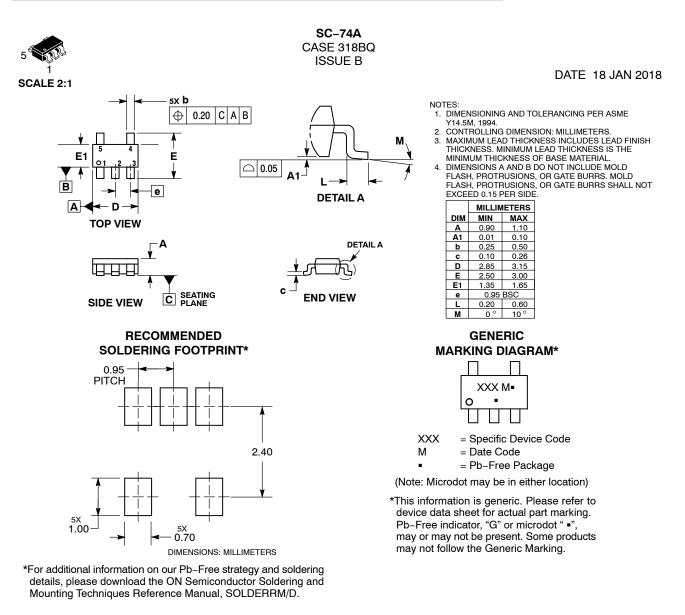

DOCUMENT NUMBER:	98AON66279G	Electronic versions are uncontrolled except when accessed directly from the Printed versions are uncontrolled except when stamped "CONTROLLED to the stamped "CONTROLLED to the stamped "CONTROLLED to the stamped sta	
DESCRIPTION:	SC-74A		PAGE 1 OF 1
ON Semiconductor reserves the right the suitability of its products for any pa	to make changes without further notice to an articular purpose, nor does ON Semiconductor	stries, LLC dba ON Semiconductor or its subsidiaries in the United States y products herein. ON Semiconductor makes no warranty, representation r assume any liability arising out of the application or use of any product or icidental damages. ON Semiconductor does not convey any license under	or guarantee regarding r circuit, and specifically





DOCUMENT NUMBER:	98ASB42984B	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.				
DESCRIPTION:	SC-88A (SC-70-5/SOT-35	SC-88A (SC-70-5/SOT-353)				

ON Semiconductor and ()) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights or the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcular performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

TECHNICAL SUPPORT

onsemi Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

NC7S00M5 NC7S00P5 NC7S00M5X NC7S00P5X NC7S00L6X