# 100 V, 3.0 A, Low V<sub>CE(sat)</sub> NPN Transistor

ON Semiconductor's  $e^2$ PowerEdge family of low  $V_{CE(sat)}$  transistors are surface mount devices featuring ultra low saturation voltage ( $V_{CE(sat)}$ ) and high current gain capability. These are designed for use in low voltage, high speed switching applications where affordable efficient energy control is important.

Typical applications are DC–DC converters and power management in portable and battery powered products such as cellular and cordless phones, PDAs, computers, printers, digital cameras and MP3 players. Other applications are low voltage motor controls in mass storage products such as disc drives and tape drives. In the automotive industry they can be used in air bag deployment and in the instrument cluster. The high current gain allows e<sup>2</sup>PowerEdge devices to be driven directly from PMU's control outputs, and the Linear Gain (Beta) makes them ideal components in analog amplifiers.

#### Features

- Complement to NSS1C300ET4G
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC–Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

#### **MAXIMUM RATINGS** ( $T_A = 25^{\circ}C$ )

Symbol	Max	Unit				
V <sub>CBO</sub>	140	Vdc				
V <sub>CEO</sub>	100	Vdc				
V <sub>EB</sub>	6.0	Vdc				
۱ <sub>C</sub>	3.0	Adc				
I <sub>CM</sub>	6.0	Adc				
Ι <sub>Β</sub>	0.5	Adc				
P <sub>D</sub>	33 0.26	W W/°C				
P <sub>D</sub>	2.1 0.017	W ₩/°C				
T <sub>J</sub> , T <sub>stg</sub>	-65 to +150	°C				
	V <sub>CBO</sub> V <sub>CEO</sub> V <sub>EB</sub> I <sub>C</sub> I <sub>CM</sub> I <sub>B</sub> P <sub>D</sub>	$\begin{array}{c c} V_{CBO} & 140 \\ \hline V_{CEO} & 100 \\ \hline V_{EB} & 6.0 \\ \hline I_C & 3.0 \\ \hline I_{CM} & 6.0 \\ \hline I_B & 0.5 \\ \hline P_D & & & \\ 33 \\ 0.26 \\ \hline P_D & & & \\ 2.1 \\ 0.017 \\ \hline \end{array}$				

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


1. These ratings are applicable when surface mounted on the minimum pad sizes recommended.



#### **ON Semiconductor®**

www.onsemi.com

## 100 VOLTS, 3.0 AMPS 12.5 WATTS NPN LOW V<sub>CE(sat)</sub> TRANSISTOR

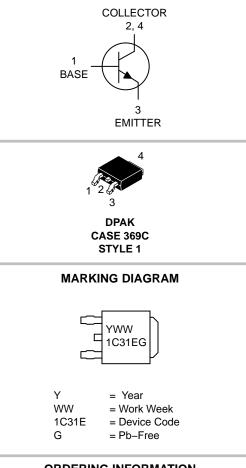

#### ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>
NSS1C301ET4G	DPAK (Pb-Free)	2500/ Tape & Reel
NSV1C301ET4G	DPAK (Pb-Free)	2500/ Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Case	$R_{ extsf{ heta}JC}$	3.8	°C/W
Thermal Resistance, Junction-to-Ambient (Note 2)	$R_{\thetaJA}$	59.5	°C/W

2. These ratings are applicable when surface mounted on the minimum pad sizes recommended.


#### ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS					
Collector – Emitter Breakdown Voltage $(I_{C} = 10 \text{ mA}, I_{B} = 0)$	V <sub>(BR)CEO</sub>	100	_	-	V
Collector – Base Breakdown Voltage $(I_C = 0.1 \text{ mA}, I_E = 0)$	V <sub>(BR)CBO</sub>	140	_	_	V
Emitter-Base Breakdown Voltage $(I_E = 0.1 \text{ mA}, I_C = 0)$	V <sub>(BR)EBO</sub>	6.0	_	-	V
Collector Cutoff Current ( $V_{CB} = 140 \text{ V}, I_E = 0$ )	I <sub>CBO</sub>	_	_	0.1	μΑ
Emitter Cutoff Current (V <sub>EB</sub> = 6.0 V)	I <sub>EBO</sub>	_	_	0.1	μΑ
ON CHARACTERISTICS	· · · ·				
DC Current Gain (Note 3) ( $I_C = 0.1 A$ , $V_{CE} = 2.0 V$ ) ( $I_C = 0.5 A$ , $V_{CE} = 2.0 V$ ) ( $I_C = 1.0 A$ , $V_{CE} = 2.0 V$ ) ( $I_C = 3.0 A$ , $V_{CE} = 2.0 V$ )	h <sub>FE</sub>	200 200 120 80		_ _ 360 _	_
Collector – Emitter Saturation Voltage (Note 3) ( $I_C = 0.1 A$ , $I_B = 10 mA$ ) ( $I_C = 1.0 A$ , $I_B = 0.100 A$ ) ( $I_C = 2.0 A$ , $I_B = 0.200 A$ ) ( $I_C = 3.0 A$ , $I_B = 0.300 A$ )	V <sub>CE(sat)</sub>	- - - -	0.015 0.045 0.080 0.115	0.050 0.090 0.150 0.250	V
Base – Emitter Saturation Voltage (Note 3) $(I_C = 1.0 \text{ A}, I_B = 0.1 \text{ A})$	V <sub>BE(sat)</sub>	_	_	1.0	V
Base – Emitter Turn–on Voltage (Note 3) ( $I_C = 1.0 \text{ A}, V_{CE} = 2.0 \text{ V}$ )	V <sub>BE(on)</sub>	_	-	0.90	V
Cutoff Frequency ( $I_C = 500 \text{ mA}, V_{CE} = 10 \text{ V}, f = 100 \text{ MHz}$ )	f <sub>T</sub>	_	120	_	MHz
Input Capacitance (V <sub>EB</sub> = 5.0 V, f = 1.0 MHz)	Cibo	_	360	_	pF
Output Capacitance (V <sub>CB</sub> = 10 V, f = 1.0 MHz)	Cobo	_	30	_	pF


3. Pulsed Condition: Pulse Width = 300  $\mu sec,$  Duty Cycle  $\leq$  2%.


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

#### **TYPICAL CHARACTERISTICS**

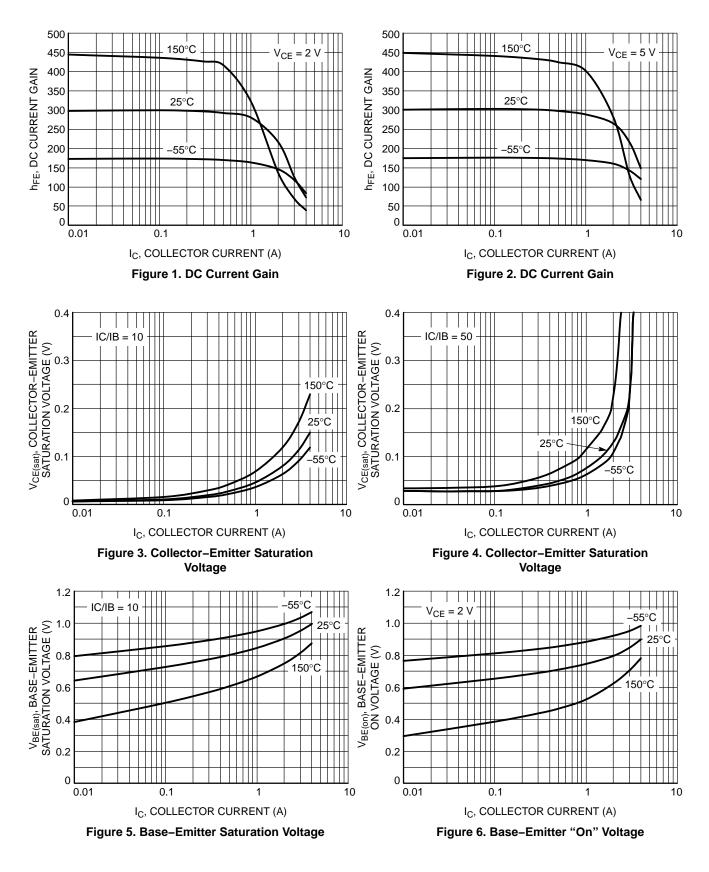

#### **TYPICAL CHARACTERISTICS**

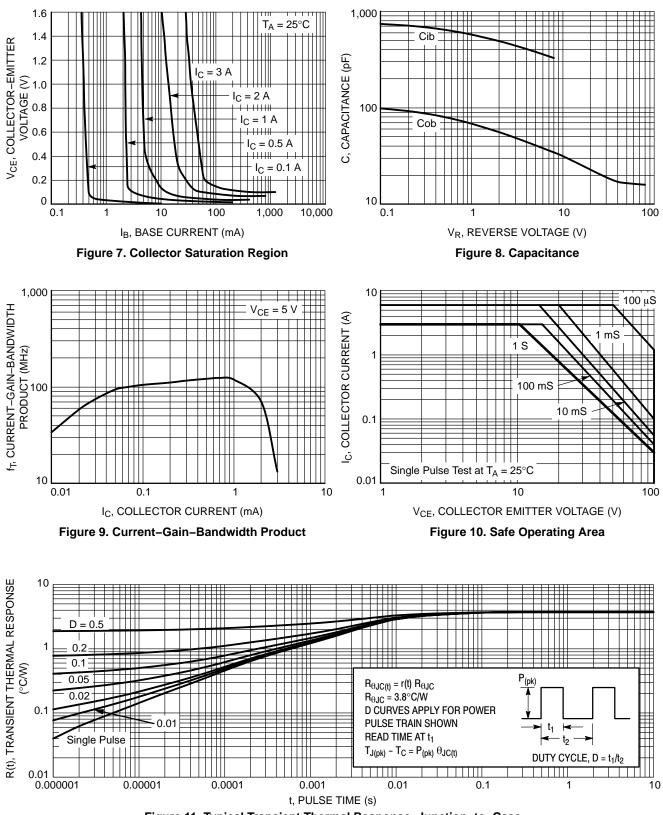







ON Semiconductor and use trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights for the res.

© Semiconductor Components Industries, LLC, 2018

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcular performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

onsemi Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Onsemi: NSV1C301ET4G NSS1C301ET4G