# **MOSFET** – Power, Single, P-Channel, SOT-223 -60 V, -2.6 A

#### Features

- Design for low R<sub>DS(on)</sub>
- Withstands High Energy in Avalanche and Commutation Modes
- AEC-Q101 Qualified NVF2955
- These Devices are Pb-Free and are RoHS Compliant

#### Applications

- Power Supplies
- PWM Motor Control
- Converters
- Power Management

#### MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise noted)

Parame	eter		Symbol	Value	Unit
Drain-to-Source Voltage			V <sub>DSS</sub>	-60	V
Gate-to-Source Voltage			V <sub>GS</sub>	±20	V
Continuous Drain	Steady	$T_A = 25^{\circ}C$	۱ <sub>D</sub>	-2.6	А
Current (Note 1)	State	T <sub>A</sub> = 85°C		-2.0	
Power Dissipation (Note 1)	Steady State	$T_A = 25^{\circ}C$	PD	2.3	W
Continuous Drain	Steady	$T_A = 25^{\circ}C$	Ι <sub>D</sub>	-1.7	А
Current (Note 2)	State	T <sub>A</sub> = 85°C		-1.3	
Power Dissipation (Note 2)		$T_A = 25^{\circ}C$	P <sub>D</sub>	1.0	W
Pulsed Drain Current	tp =	= 10 μs	I <sub>DM</sub>	-17	А
Operating Junction and Storage Temperature			T <sub>J</sub> , T <sub>STG</sub>	–55 to 175	°C
Single Pulse Drain-to-Source Avalanche Energy (V <sub>DD</sub> = 25 V, V <sub>G</sub> = 10 V, I <sub>PK</sub> = 6.7 A, L = 10 mH, R <sub>G</sub> = 25 $\Omega$ )			EAS	225	mJ
Lead Temperature for Solo (1/8" from case for 10 sec		ooses	ΤL	260	°C

#### THERMAL RESISTANCE RATINGS

Parameter	Symbol	Max	Unit
Junction-to-Tab (Drain) - Steady State (Note 2)	$R_{\theta JC}$	14	
Junction-to-Ambient - Steady State (Note 1)	$R_{\theta JA}$	65	°C/W
Junction-to-Ambient - Steady State (Note 2)	$R_{\theta JA}$	150	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. When surface mounted to an FR4 board using 1 in. pad size (Cu. area = 1.127 in<sup>2</sup> [1 oz] including traces)





# **ON Semiconductor®**

#### http://onsemi.com

V <sub>(BR)DSS</sub>	R <sub>DS(on)</sub> TYP	I <sub>D</sub> MAX
–60 V	145 mΩ @ −10 V	–2.6 A







#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
NTF2955T1G	SOT–223 (Pb–Free)	1000 /Tape & Reel
NVF2955T1G	SOT-223 (Pb-Free)	1000/ Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

2. When surface mounted to an FR4 board using the minimum recommended pad size (Cu. area = 0.341 in<sup>2</sup>)

#### ELECTRICAL CHARACTERISTICS (TJ=25°C unless otherwise stated)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit		
OFF CHARACTERISTICS									
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> = 0 V, I	<sub>D</sub> = –250 μA	-60			V		
Drain-to-Source Breakdown Voltage Temperature Coefficient	V <sub>(BR)DSS</sub> /T <sub>J</sub>				66.4		mV/°C		
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	$V_{GS} = 0 V,$ $V_{DS} = -60 V$	$T_J = 25^{\circ}C$			-1.0	μΑ		
		V <sub>DS</sub> = -60 V	T <sub>J</sub> = 125°C			-50			
Gate-to-Source Leakage Current	I <sub>GSS</sub>	V <sub>DS</sub> = 0 V, V	/ <sub>GS</sub> = ±20 V			±100	nA		

#### **ON CHARACTERISTICS** (Note 3)

Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}, I_D = -1.0 \text{ mA}$	-2.0		-4.0	V
Drain-to-Source On Resistance	R <sub>DS(on)</sub>	$V_{GS}$ = -10 V, I <sub>D</sub> = -0.75 A		145	170	mΩ
		V <sub>GS</sub> = –10 V, I <sub>D</sub> = –1.5 A		150	180	
		V <sub>GS</sub> = -10 V, I <sub>D</sub> = -2.4 A		154	185	
Forward Transconductance	9fs	$V_{GS}$ = -15 V, I <sub>D</sub> = -0.75 A		1.77		S

#### **CHARGES AND CAPACITANCES**

Input Capacitance	C <sub>ISS</sub>	V <sub>GS</sub> = 0 V, f = 1.0 MHz, V <sub>DS</sub> = 25 V	492	pF
Output Capacitance	C <sub>OSS</sub>	v <sub>DS</sub> = 25 v	165	
Reverse Transfer Capacitance	C <sub>RSS</sub>		50	
Total Gate Charge	Q <sub>G(TOT)</sub>	$V_{GS} = 10 \text{ V}, V_{DS} = 30 \text{ V},$ $I_{D} = 1.5 \text{ A}$	14.3	nC
Threshold Gate Charge	Q <sub>G(TH)</sub>	l <sub>D</sub> = 1.5 A	1.2	
Gate-to-Source Charge	Q <sub>GS</sub>		2.3	
Gate-to-Drain Charge	Q <sub>GD</sub>		5.2	

#### SWITCHING CHARACTERISTICS (Note 4)

Turn-On Delay Time	t <sub>d(ON)</sub>	$V_{GS} = 10 \text{ V}, \text{ V}_{DD} = 25 \text{ V},$	11	ns
Rise Time	t <sub>r</sub>	$I_D$ = 1.5 A, $R_G$ = 9.1 Ω $R_L$ = 25 Ω	7.6	
Turn-Off Delay Time	t <sub>d(OFF)</sub>		65	
Fall Time	t <sub>f</sub>		38	


#### DRAIN-SOURCE DIODE CHARACTERISTICS

Forward Diode Voltage	V <sub>SD</sub>	$V_{GS} = 0 V,$	$T_J = 25^{\circ}C$	-1.10	-1.30	V
		I <sub>S</sub> = 1.5 Å	T <sub>J</sub> = 125°C	-0.9		
Reverse Recovery Time	t <sub>RR</sub>	V <sub>GS</sub> = 0 V, dI <sub>S</sub> /dt = 100 A/µs, I <sub>S</sub> = 1.5 A		36		
Charge Time	ta			20		ns
Discharge Time	t <sub>b</sub>			16		
Reverse Recovery Charge	Q <sub>RR</sub>			0.139		nC


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 3. Pulse Test: pulse width  $\leq$  300 $\mu$ s, duty cycle  $\leq$  2%.


4. Switching characteristics are independent of operating junction temperatures.

## TYPICAL PERFORMANCE CURVES (T<sub>J</sub> = $25^{\circ}$ C unless otherwise noted)

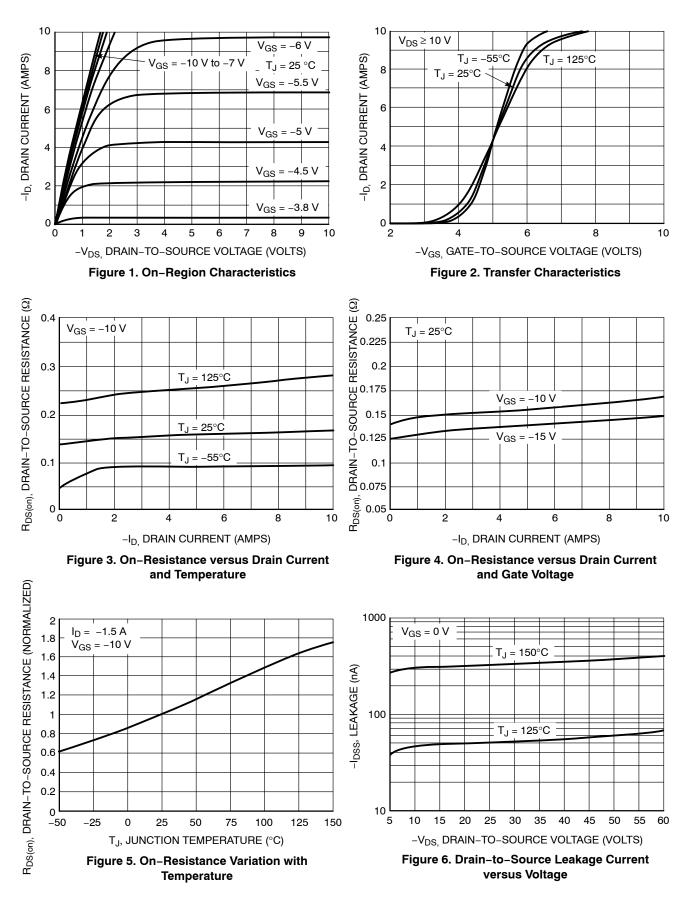

### TYPICAL PERFORMANCE CURVES (T<sub>J</sub> = 25°C unless otherwise noted)

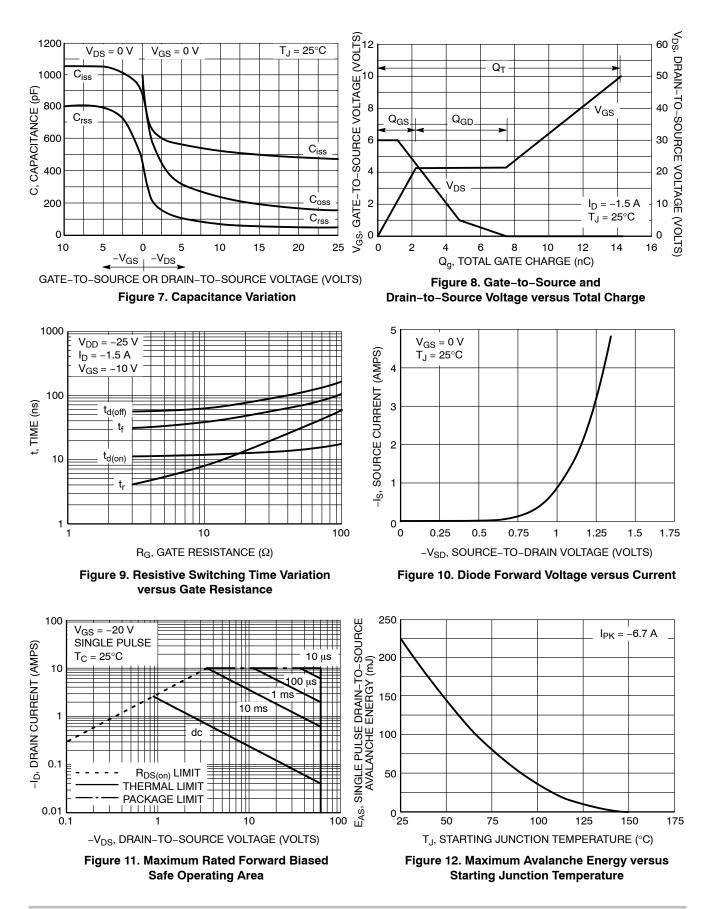

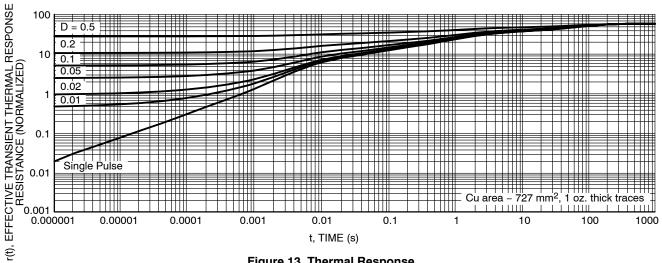



DATE 02 OCT 2018





SCALE 1:1

0.10 C

A1



-11

SIDE VIEW


DETAIL A

NDTES:

SOT-223 (TO-261) CASE 318E-04 ISSUE R

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- 2. CONTROLLING DIMENSION: MILLIMETERS
- 3. DIMENSIONS D & E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.200MM PER SIDE.
- 4. DATUMS A AND B ARE DETERMINED AT DATUM H.
- 5. ALLS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST PDINT OF THE PACKAGE BODY.
- 6. POSITIONAL TOLERANCE APPLIES TO DIMENSIONS 6 AND 61.

	MILLIMETERS					
DIM	MIN.	NDM.	MAX.			
A	1.50	1.63	1.75			
A1	0.02	0.06	0.10			
b	0.60	0.75	0.89			
b1	2.90	3.06	3.20			
с	0.24	0.29	0.35			
D	6.30	6.50	6.70			
E	3.30	3.50	3.70			
e		2.30 BSC				
L	0.20					
L1	1.50	1.75	2.00			
He	6.70	7.00	7.30			
θ	0*		10*			



DOCUMENT NUMBER:	98ASB42680B	Electronic versions are uncontrolled except when accessed directly from the Document Reposito Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.				
DESCRIPTION:	SOT-223 (TO-261)		PAGE 1 OF 2			
ON Semiconductor and 🕕 are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries.						

FRONT VIEW

ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.


© Semiconductor Components Industries, LLC, 2018

#### SOT-223 (TO-261) CASE 318E-04 ISSUE R

#### DATE 02 OCT 2018

STYLE 1: PIN 1. BASE 2. COLLECTOR 3. EMITTER 4. COLLECTOR	STYLE 2: PIN 1. ANODE 2. CATHODE 3. NC 4. CATHODE	STYLE 3: PIN 1. GATE 2. DRAIN 3. SOURCE 4. DRAIN	STYLE 4: PIN 1. SOURCE 2. DRAIN 3. GATE 4. DRAIN	STYLE 5: PIN 1. DRAIN 2. GATE 3. SOURCE 4. GATE
STYLE 6: PIN 1. RETURN 2. INPUT 3. OUTPUT 4. INPUT	STYLE 7: PIN 1. ANODE 1 2. CATHODE 3. ANODE 2 4. CATHODE	STYLE 8: CANCELLED	Style 9: Pin 1. Input 2. Ground 3. Logic 4. Ground	STYLE 10: PIN 1. CATHODE 2. ANODE 3. GATE 4. ANODE
STYLE 11: PIN 1. MT 1 2. MT 2 3. GATE 4. MT 2	Style 12: Pin 1. Input 2. Output 3. NC 4. Output	STYLE 13: PIN 1. GATE 2. COLLECTOR 3. EMITTER 4. COLLECTOR		

# GENERIC MARKING DIAGRAM\*



- A = Assembly Location
- Y = Year
- W = Work Week
- XXXXX = Specific Device Code
- = Pb-Free Package
- (Note: Microdot may be in either location) \*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98ASB42680B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-223 (TO-261)		PAGE 2 OF 2
ON Semiconductor and (1) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights or the			

© Semiconductor Components Industries, LLC, 2018

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcular performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems. or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

#### TECHNICAL SUPPORT

onsemi Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

onsemi:

NTF2955T1 NTF2955T1G NVF2955T1G