# MOSFET – Power, Single, N-Channel, SO-8FL 30 V, 0.9 mΩ, 303 A

#### **Features**

- Small Footprint (5x6 mm) for Compact Design
- Low R<sub>DS(on)</sub> to Minimize Conduction Losses
- Low Q<sub>G</sub> and Capacitance to Minimize Driver Losses
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise noted)

Parar	neter		Symbol	Value	Unit
Drain-to-Source Voltage			V <sub>DSS</sub>	30	٧
Gate-to-Source Voltage	€		V <sub>GS</sub>	±20	V
Continuous Drain Current R <sub>0</sub> JC (Notes 1, 3)	Steady	T <sub>C</sub> = 25°C	I <sub>D</sub>	303	Α
Power Dissipation $R_{\theta JC}$ (Notes 1, 3)	State	T <sub>C</sub> = 25°C	P <sub>D</sub>	134	W
Continuous Drain Current $R_{\theta JA}$ (Notes 1, 2, 3)	Steady State	T <sub>A</sub> = 25°C	I <sub>D</sub>	47	Α
Power Dissipation $R_{\theta JA}$ (Notes 1, 2, 3)	Oldic	T <sub>A</sub> = 25°C	P <sub>D</sub>	3.2	W
Pulsed Drain Current	Ised Drain Current $T_A = 25^{\circ}C$ , $t_p = 10 \mu s$			552	Α
Operating Junction and Storage Temperature			T <sub>J</sub> , T <sub>stg</sub>	-55 to 150	°C
Source Current (Body Diode)			I <sub>S</sub>	110	Α
Single Pulse Drain-to-Source Avalanche Energy (I <sub>L(pk)</sub> = 35 A)			E <sub>AS</sub>	862	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			TL	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL RESISTANCE MAXIMUM RATINGS (Note 1)

Parameter	Symbol	Value	Unit
Junction-to-Case - Steady State	$R_{\theta JC}$	0.93	°C/W
Junction-to-Ambient - Steady State (Note 2)	$R_{\theta JA}$	39	


- The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- 2. Surface-mounted on FR4 board using a 650 mm<sup>2</sup>, 2 oz. Cu pad.
- Maximum current for pulses as long as 1 second is higher but is dependent on pulse duration and duty cycle.



#### ON Semiconductor®


#### www.onsemi.com

V <sub>(BR)DSS</sub>	R <sub>DS(ON)</sub> MAX	I <sub>D</sub> MAX	
30 V	0.9 mΩ @ 10 V	000 4	
30 V	1.2 mΩ @ 4.5 V	303 A	



**N-CHANNEL MOSFET** 





A = Assembly Location

Y = Year
W = Work Week
ZZ = Lot Traceability

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
NTMFS4C01NT1G	SO-8FL (Pb-Free)	1500 / Tape & Reel
NTMFS4C01NT3G	SO-8FL (Pb-Free)	5000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### **ELECTRICAL CHARACTERISTICS** ( $T_J = 25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit	
OFF CHARACTERISTICS	-			-	<u> </u>		-	
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	$V_{GS}$ = 0 V, $I_{D}$ = 250 $\mu A$		30			V	
Drain-to-Source Breakdown Voltage Temperature Coefficient	V <sub>(BR)DSS</sub> / T <sub>J</sub>				16.3		mV/°C	
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V,	T <sub>J</sub> = 25 °C			1		
		V <sub>DS</sub> = 24 V	T <sub>J</sub> = 125°C			100	μΑ	
Gate-to-Source Leakage Current	I <sub>GSS</sub>	$V_{DS} = 0 V, V_{G}$	<sub>S</sub> = 20 V			100	nA	
ON CHARACTERISTICS (Note 4)								
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}, I_{D}$	= 250 μA	1.3		2.2	V	
Negative Threshold Temperature Coefficient	V <sub>GS(TH)</sub> /T <sub>J</sub>				5.8		mV/°C	
Drain-to-Source On Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V	I <sub>D</sub> = 30 A		0.71	0.9		
		V <sub>GS</sub> = 4.5 V	I <sub>D</sub> = 30 A		0.94	1.2	mΩ	
Forward Transconductance	9 <sub>FS</sub>	V <sub>DS</sub> = 3 V	I <sub>D</sub> = 30 A		183		S	
Gate Resistance	$R_{G}$	T <sub>A</sub> = 25 °C			1.0		Ω	
CHARGES AND CAPACITANCES								
Input Capacitance	C <sub>ISS</sub>	V <sub>GS</sub> = 0 V, f = 1 MHz, V <sub>DS</sub> = 15 V			10144		pF	
Output Capacitance	Coss				5073			
Reverse Transfer Capacitance	C <sub>RSS</sub>				148			
Total Gate Charge	Q <sub>G(TOT)</sub>				63			
Threshold Gate Charge	Q <sub>G(TH)</sub>	V <sub>GS</sub> = 4.5 V, V <sub>DS</sub> = 15 V; I <sub>D</sub> = 30 A			18		nC	
Gate-to-Source Charge	Q <sub>GS</sub>				29			
Gate-to-Drain Charge	$Q_{GD}$				13			
Total Gate Charge	Q <sub>G(TOT)</sub>	V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 15 V, I <sub>D</sub> = 30 A			139		nC	
SWITCHING CHARACTERISTICS (Note 5)	•	•					•	
Turn-On Delay Time	t <sub>d(ON)</sub>				29			
Rise Time	t <sub>r</sub>	$V_{GS}$ = 4.5 V, $V_{DS}$ = 15 V, $I_{D}$ = 15 A, $R_{G}$ = 3.0 $\Omega$			68		ns	
Turn-Off Delay Time	t <sub>d(OFF)</sub>				53			
Fall Time	t <sub>f</sub>				36			
DRAIN-SOURCE DIODE CHARACTERISTIC	s	•					•	
Forward Diode Voltage	$V_{SD}$	V <sub>GS</sub> = 0 V,	T <sub>J</sub> = 25°C		0.73	1.1	$\Box$	
		I <sub>S</sub> = 10 A	T <sub>J</sub> = 125°C		0.55		- v	
Reverse Recovery Time	t <sub>RR</sub>	$V_{GS} = 0 \text{ V, } dI_{S}/dt = 100 \text{ A}/\mu\text{s,}$ $I_{S} = 30 \text{ A}$			87			
Charge Time	ta				43		ns	
Discharge Time	t <sub>b</sub>				44		1	
	Q <sub>RR</sub>						1	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Pulse Test: pulse width  $\leq 300~\mu s$ , duty cycle  $\leq 2\%$ .

5. Switching characteristics are independent of operating junction temperatures.

#### **TYPICAL CHARACTERISTICS**

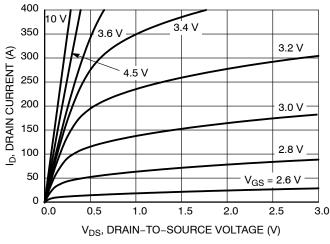


Figure 1. On-Region Characteristics

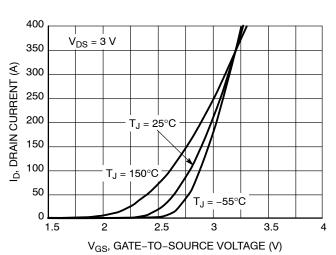


Figure 2. Transfer Characteristics

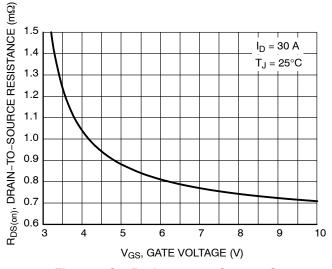


Figure 3. On-Resistance vs. Gate-to-Source Voltage

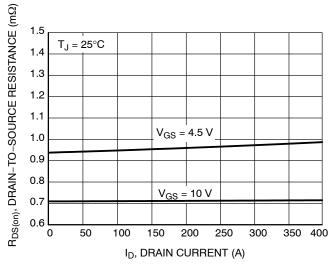


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

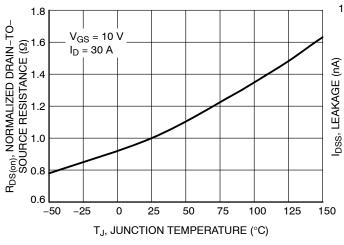


Figure 5. On–Resistance Variation with Temperature

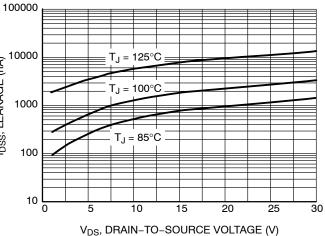


Figure 6. Drain-to-Source Leakage Current vs. Voltage

#### **TYPICAL CHARACTERISTICS**

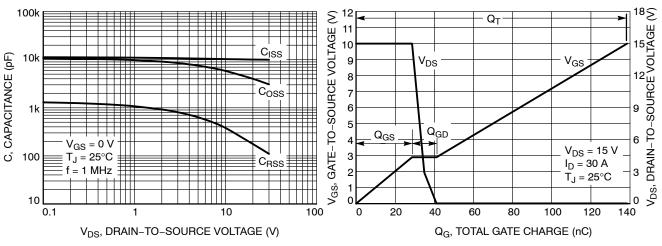


Figure 7. Capacitance Variation

Figure 8. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge

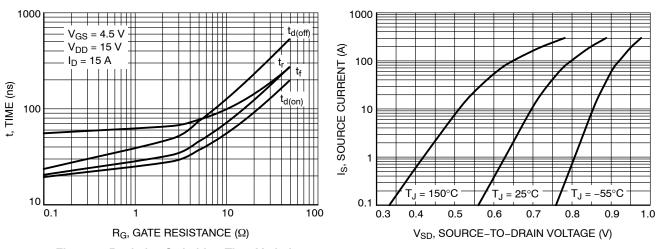


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

Figure 10. Diode Forward Voltage vs. Current

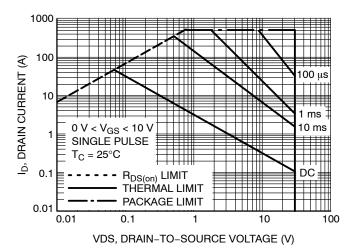


Figure 11. Maximum Rated Forward Biased Safe Operating Area

#### **TYPICAL CHARACTERISTICS**

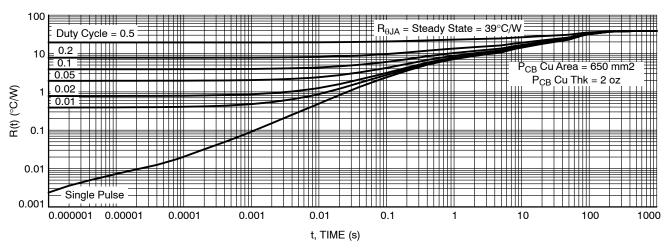


Figure 12. Thermal Impedance (Junction-to-Ambient)

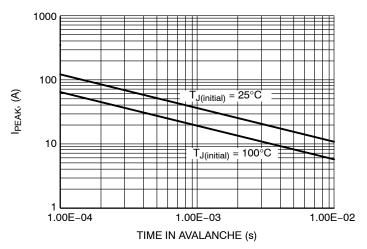


Figure 13. Avalanche Characteristics



0.10

0.10

SIDE VIEW

DFN5 5x6, 1.27P (SO-8FL) CASE 488AA ISSUE N

**DATE 25 JUN 2018** 

#### NOTES:

BURRS

- DIMENSIONING AND TOLERANCING PER
- ASME Y14.5M, 1994.
  CONTROLLING DIMENSION: MILLIMETER.
  DIMENSION D1 AND E1 DO NOT INCLUDE MOLD FLASH PROTRUSIONS OR GATE

	MILLIMETERS			
DIM	MIN	NOM	MAX	
Α	0.90	1.00	1.10	
A1	0.00		0.05	
b	0.33	0.41	0.51	
С	0.23	0.28	0.33	
D	5.00	5.15	5.30	
D1	4.70	4.90	5.10	
D2	3.80	4.00	4.20	
E	6.00	6.15	6.30	
E1	5.70	5.90	6.10	
E2	3.45	3.65	3.85	
е	1.27 BSC			
G	0.51	0.575	0.71	
K	1.20	1.35	1.50	
L	0.51	0.575	0.71	
L1	0.125 REF			
M	3.00	3.40	3.80	
A	0 0		12 °	

#### **GENERIC** MARKING DIAGRAM\*



XXXXXX = Specific Device Code

= Assembly Location Α

Υ = Year W = Work Week ZZ = Lot Traceability

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present. Some products may not follow the Generic Marking.





**DETAIL A** 

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON14036D	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	DFN5 5x6, 1.27P (SO-8FL)		PAGE 1 OF 1	

ON Semiconductor and unare trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ÓN Semiconductor does not convey any license under its patent rights nor the rights of others

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### onsemi:

NTMFS4C01NT1G NTMFS4C01NT3G