

# NTMFS4C35N

## MOSFET – Power, Single, N-Channel, SO-8 FL 30 V, 80 A

### Features

- Low  $R_{DS(on)}$  to Minimize Conduction Losses
- Low Capacitance to Minimize Driver Losses
- Optimized Gate Charge to Minimize Switching Losses
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Applications

- CPU Power Delivery
- DC-DC Converters

### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Symbol	Value	Unit
Drain-to-Source Voltage	$V_{DSS}$	30	V
Gate-to-Source Voltage	$V_{GS}$	$\pm 20$	V
Continuous Drain Current $R_{\theta JA}$ (Note 1)	$I_D$	22.5	A
		16.8	
Power Dissipation $R_{\theta JA}$ (Note 1)	$P_D$	2.59	W
Continuous Drain Current $R_{\theta JA} \leq 10$ s (Note 1)	$I_D$	36	A
		27	
Power Dissipation $R_{\theta JA} \leq 10$ s (Note 1)	$P_D$	6.65	W
Continuous Drain Current $R_{\theta JA}$ (Note 2)	$I_D$	12.4	A
		9.3	
Power Dissipation $R_{\theta JA}$ (Note 2)	$P_D$	0.78	W
Continuous Drain Current $R_{\theta JC}$ (Note 1)	$I_D$	80	A
		60	
Power Dissipation $R_{\theta JC}$ (Note 1)	$P_D$	33	W
Pulsed Drain Current	$I_{DM}$	180	A
Current Limited by Package	$I_{Dmax}$	80	A
Operating Junction and Storage Temperature	$T_J$ , $T_{STG}$	-55 to +150	$^\circ\text{C}$
Source Current (Body Diode)	$I_S$	30	A
Drain to Source $dV/dt$	$dV/dt$	7.0	V/ns
Single Pulse Drain-to-Source Avalanche Energy ( $T_J = 25^\circ\text{C}$ , $V_{GS} = 10$ V, $I_L = 48$ A <sub>pk</sub> , $L = 0.1$ mH, $R_{GS} = 25$ $\Omega$ ) (Note 3)	$E_{AS}$	115	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)	$T_L$	260	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


1. Surface-mounted on FR4 board using 1 sq-in pad, 1 oz Cu.



ON Semiconductor®


<http://onsemi.com>

$V_{(BR)DSS}$	$R_{DS(ON) \text{ MAX}}$	$I_D \text{ MAX}$
30 V	3.2 m $\Omega$ @ 10 V	80 A
	4.0 m $\Omega$ @ 4.5 V	



N-CHANNEL MOSFET

### MARKING DIAGRAM

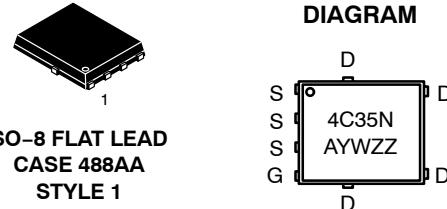

A = Assembly Location

Y = Year

W = Work Week

ZZ = Lot Traceability

### ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>
NTMFS4C35NT1G	SO-8 FL (Pb-Free)	1500 / Tape & Reel
NTMFS4C35NT3G	SO-8 FL (Pb-Free)	5000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

## **NTMFS4C35N**

2. Surface-mounted on FR4 board using the minimum recommended pad size.
3. This is the absolute maximum ratings. Parts are 100% tested at  $T_J = 25^\circ\text{C}$ ,  
 $V_{GS} = 10\text{ V}$ ,  $I_L = 29\text{ A}$ ,  $E_{AS} = 42\text{ mJ}$ .

# NTMFS4C35N

## THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Junction-to-Case (Drain)	$R_{\theta JC}$	3.8	$^{\circ}\text{C}/\text{W}$
Junction-to-Ambient – Steady State (Note 4)	$R_{\theta JA}$	48.3	
Junction-to-Ambient – Steady State (Note 5)	$R_{\theta JA}$	159.3	
Junction-to-Ambient – (t ≤ 10 s) (Note 4)	$R_{\theta JA}$	18.8	

4. Surface-mounted on FR4 board using 1 sq-in pad, 1 oz Cu.  
 5. Surface-mounted on FR4 board using the minimum recommended pad size.

## ELECTRICAL CHARACTERISTICS (T<sub>J</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
-----------	--------	----------------	-----	-----	-----	------

### OFF CHARACTERISTICS

Drain-to-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0 \text{ V}, I_{\text{D}} = 250 \mu\text{A}$	30			V
Drain-to-Source Breakdown Voltage (transient)	$V_{(\text{BR})\text{DSS}t}$	$V_{\text{GS}} = 0 \text{ V}, I_{\text{D}}(\text{aval}) = 13.2 \text{ A}, T_{\text{case}} = 25^{\circ}\text{C}, t_{\text{transient}} = 100 \text{ ns}$	34			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	$V_{(\text{BR})\text{DSS}}/T_J$			12		$\text{mV}/^{\circ}\text{C}$
Zero Gate Voltage Drain Current	$I_{\text{DSS}}$	$V_{\text{GS}} = 0 \text{ V}, V_{\text{DS}} = 24 \text{ V}$	$T_J = 25^{\circ}\text{C}$		1.0	$\mu\text{A}$
			$T_J = 125^{\circ}\text{C}$		10	
Gate-to-Source Leakage Current	$I_{\text{GSS}}$	$V_{\text{DS}} = 0 \text{ V}, V_{\text{GS}} = \pm 20 \text{ V}$			±100	nA

### ON CHARACTERISTICS (Note 6)

Gate Threshold Voltage	$V_{\text{GS}(\text{TH})}$	$V_{\text{GS}} = V_{\text{DS}}, I_{\text{D}} = 250 \mu\text{A}$	1.3		2.2	V
Negative Threshold Temperature Coefficient	$V_{\text{GS}(\text{TH})}/T_J$			5.0		$\text{mV}/^{\circ}\text{C}$
Drain-to-Source On Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = 10 \text{ V}$	$I_{\text{D}} = 30 \text{ A}$	2.56	3.2	$\text{m}\Omega$
		$V_{\text{GS}} = 4.5 \text{ V}$	$I_{\text{D}} = 30 \text{ A}$	3.4	4.0	
Forward Transconductance	$g_{\text{FS}}$	$V_{\text{DS}} = 1.5 \text{ V}, I_{\text{D}} = 15 \text{ A}$		50		S
Gate Resistance	$R_{\text{G}}$	$T_A = 25^{\circ}\text{C}$		1.0		$\Omega$

### CHARGES AND CAPACITANCES

Input Capacitance	$C_{\text{ISS}}$	$V_{\text{GS}} = 0 \text{ V}, f = 1 \text{ MHz}, V_{\text{DS}} = 15 \text{ V}$		2300		$\text{pF}$
Output Capacitance	$C_{\text{OSS}}$			1097		
Reverse Transfer Capacitance	$C_{\text{RSS}}$			46		
Capacitance Ratio	$C_{\text{RSS}}/C_{\text{ISS}}$	$V_{\text{GS}} = 0 \text{ V}, V_{\text{DS}} = 15 \text{ V}, f = 1 \text{ MHz}$		0.02		
Total Gate Charge	$Q_{\text{G}(\text{TOT})}$	$V_{\text{GS}} = 4.5 \text{ V}, V_{\text{DS}} = 15 \text{ V}; I_{\text{D}} = 30 \text{ A}$		15		$\text{nC}$
Threshold Gate Charge	$Q_{\text{G}(\text{TH})}$			3.3		
Gate-to-Source Charge	$Q_{\text{GS}}$			6.5		
Gate-to-Drain Charge	$Q_{\text{GD}}$			5.5		
Gate Plateau Voltage	$V_{\text{GP}}$			3.1		V
Total Gate Charge	$Q_{\text{G}(\text{TOT})}$	$V_{\text{GS}} = 10 \text{ V}, V_{\text{DS}} = 15 \text{ V}; I_{\text{D}} = 30 \text{ A}$		32.5		$\text{nC}$

### SWITCHING CHARACTERISTICS (Note 7)

Turn-On Delay Time	$t_{\text{d}(\text{ON})}$	$V_{\text{GS}} = 4.5 \text{ V}, V_{\text{DS}} = 15 \text{ V}, I_{\text{D}} = 15 \text{ A}, R_{\text{G}} = 3.0 \Omega$		12.6		$\text{ns}$
Rise Time	$t_r$			33		
Turn-Off Delay Time	$t_{\text{d}(\text{OFF})}$			21.4		
Fall Time	$t_f$			6.7		

6. Pulse Test: pulse width ≤ 300  $\mu\text{s}$ , duty cycle ≤ 2%.  
 7. Switching characteristics are independent of operating junction temperatures.

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
<b>SWITCHING CHARACTERISTICS (Note 7)</b>						
Turn-On Delay Time	$t_{d(\text{ON})}$	$V_{GS} = 10\text{ V}$ , $V_{DS} = 15\text{ V}$ , $I_D = 15\text{ A}$ , $R_G = 3.0\text{ }\Omega$		8.7		ns
Rise Time	$t_r$			26		
Turn-Off Delay Time	$t_{d(\text{OFF})}$			28		
Fall Time	$t_f$			4.4		

## DRAIN-SOURCE DIODE CHARACTERISTICS

Forward Diode Voltage	$V_{SD}$	$V_{GS} = 0\text{ V}$ , $I_S = 10\text{ A}$	$T_J = 25^\circ\text{C}$		0.8	1.1	V
			$T_J = 125^\circ\text{C}$		0.62		
Reverse Recovery Time	$t_{RR}$	$V_{GS} = 0\text{ V}$ , $dI_S/dt = 100\text{ A}/\mu\text{s}$ , $I_S = 30\text{ A}$			41		ns
Charge Time	$t_a$				21		
Discharge Time	$t_b$				20		
Reverse Recovery Charge	$Q_{RR}$				30		nC

6. Pulse Test: pulse width  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$ .

7. Switching characteristics are independent of operating junction temperatures.

## TYPICAL CHARACTERISTICS

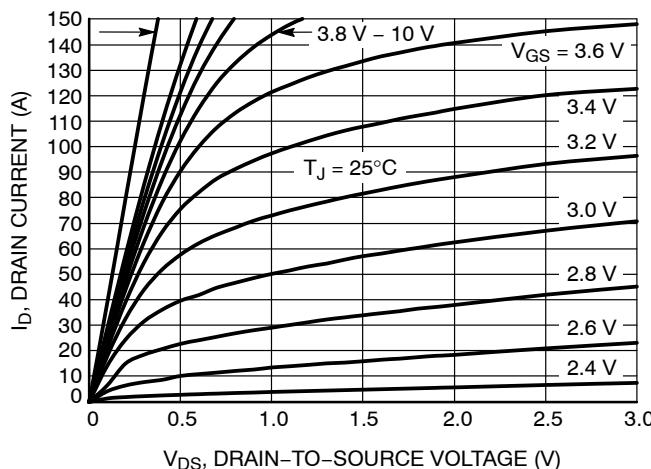


Figure 1. On-Region Characteristics

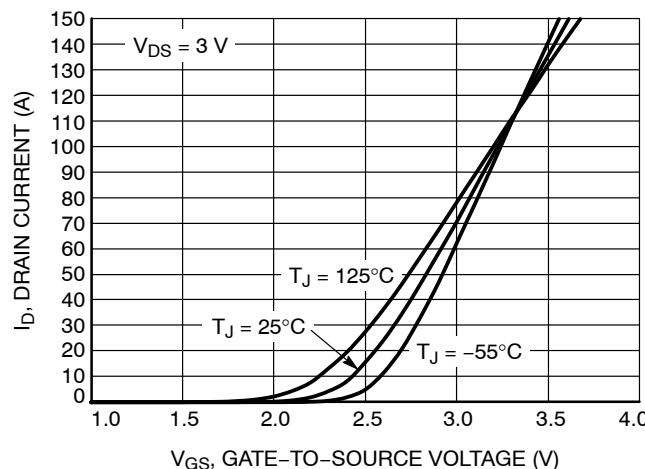


Figure 2. Transfer Characteristics

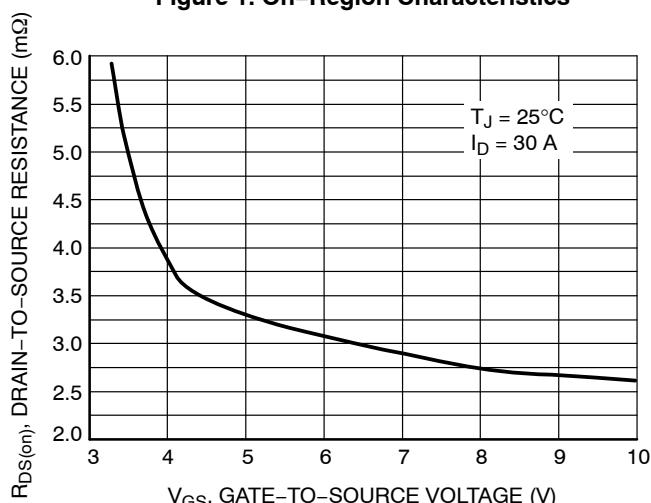


Figure 3. On-Resistance vs.  $V_{GS}$








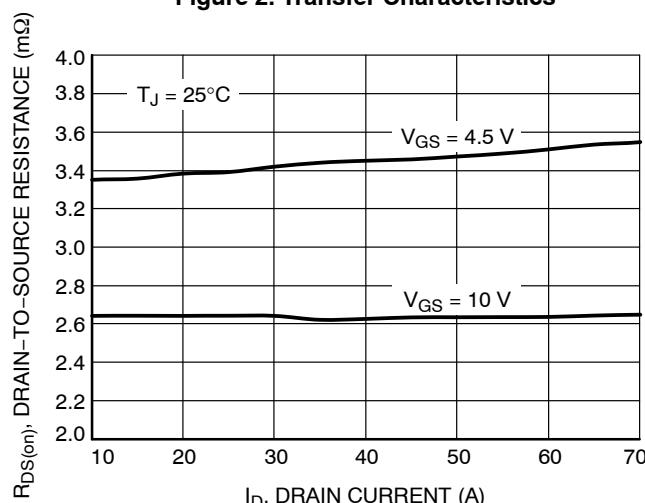


Figure 4. On-Resistance vs. Drain Current and Gate Voltage


TYPICAL CHARACTERISTICS

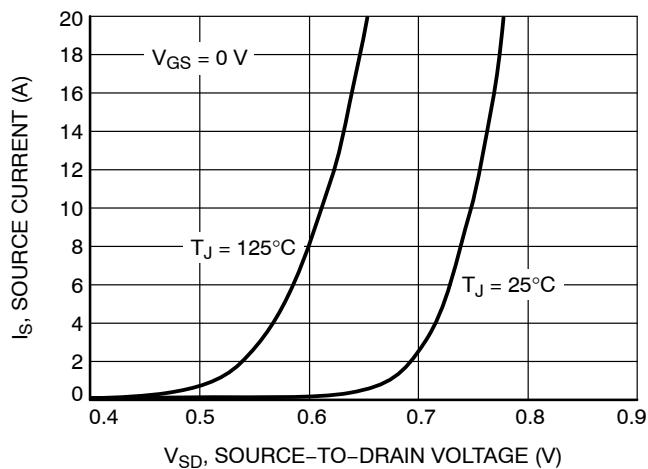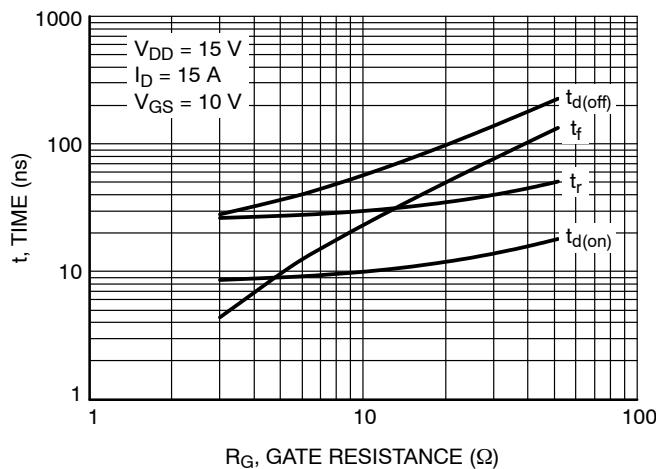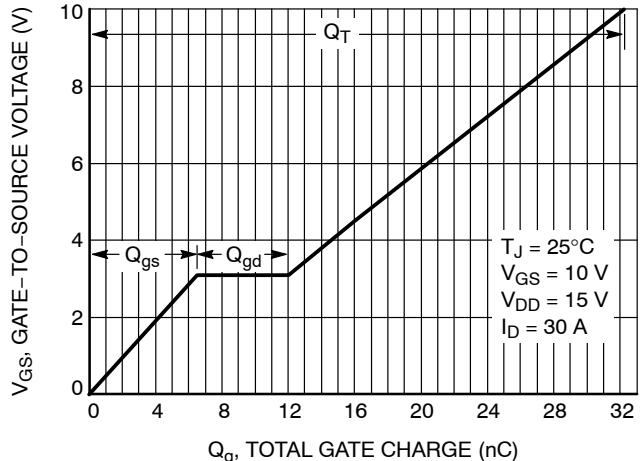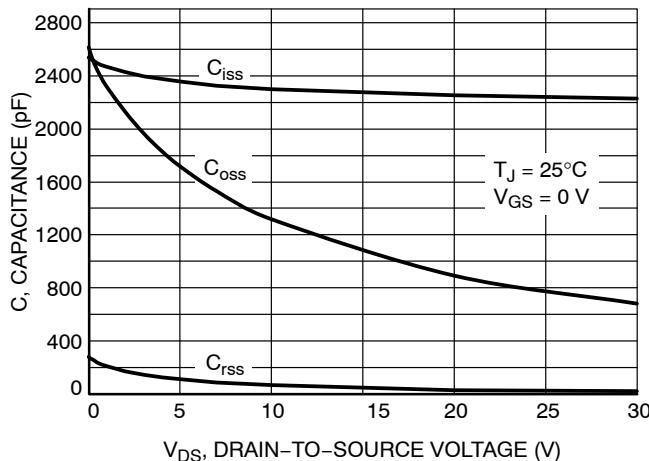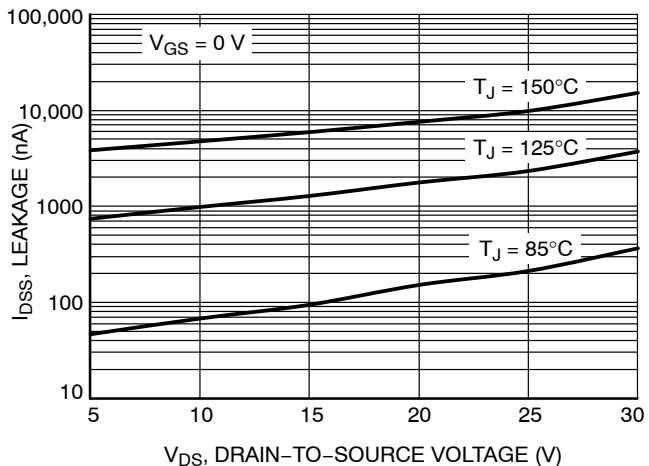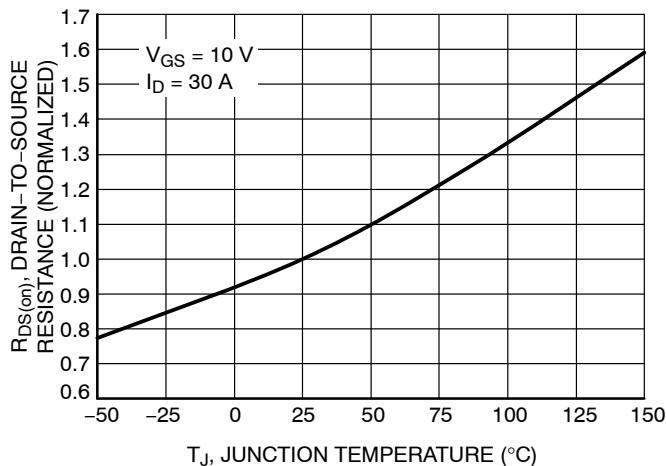


## TYPICAL CHARACTERISTICS

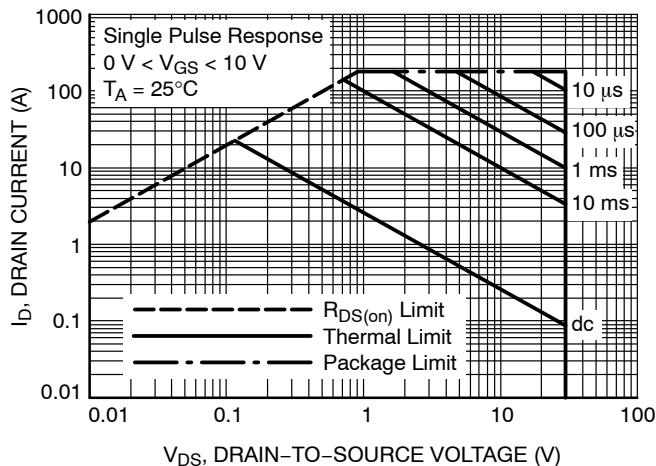


**Figure 11. Maximum Rated Forward Biased Safe Operating Area**

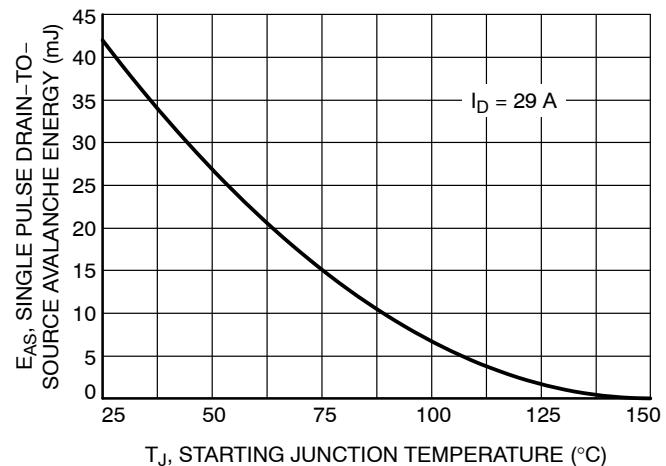


**Figure 12. Maximum Avalanche Energy vs. Stating Junction Temperature**

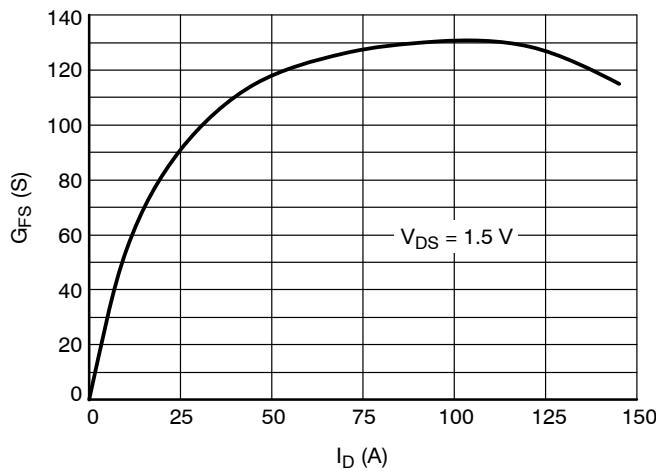

**Figure 13.  $G_{FS}$  vs.  $I_D$**

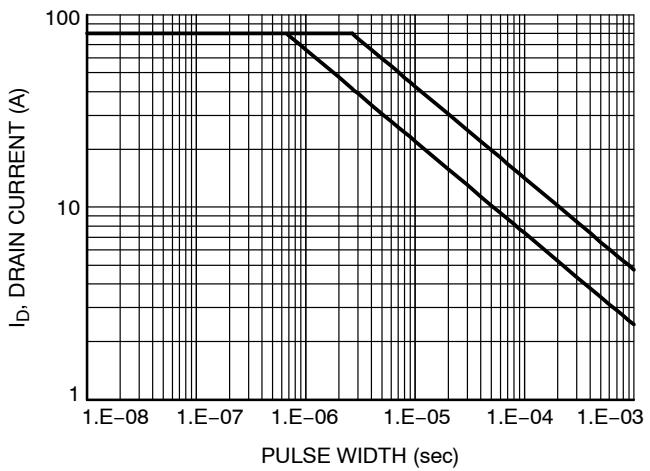

**Figure 14. Avalanche Characteristics**

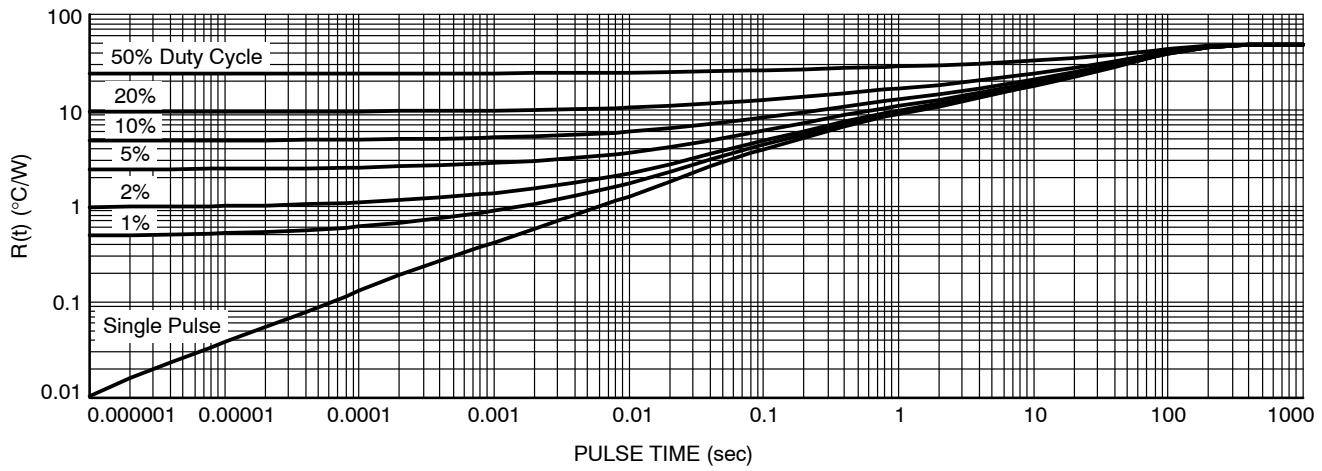


**Figure 15. Thermal Response**

# MECHANICAL CASE OUTLINE

## PACKAGE DIMENSIONS

ON Semiconductor®



SCALE 2:1




DFN5 5x6, 1.27P  
(SO-8FL)  
CASE 488AA  
ISSUE N

DATE 25 JUN 2018

NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION D1 AND E1 DO NOT INCLUDE MOLD FLASH PROTRUSIONS OR GATE BURRS.

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	0.90	1.00	1.10
A1	0.00	—	0.05
b	0.33	0.41	0.51
c	0.23	0.28	0.33
D	5.00	5.15	5.30
D1	4.70	4.90	5.10
D2	3.80	4.00	4.20
E	6.00	6.15	6.30
E1	5.70	5.90	6.10
E2	3.45	3.65	3.85
e	1.27 BSC		
G	0.51	0.575	0.71
K	1.20	1.35	1.50
L	0.51	0.575	0.71
L1	0.125 REF		
M	3.00	3.40	3.80
θ	0 °	—	12 °

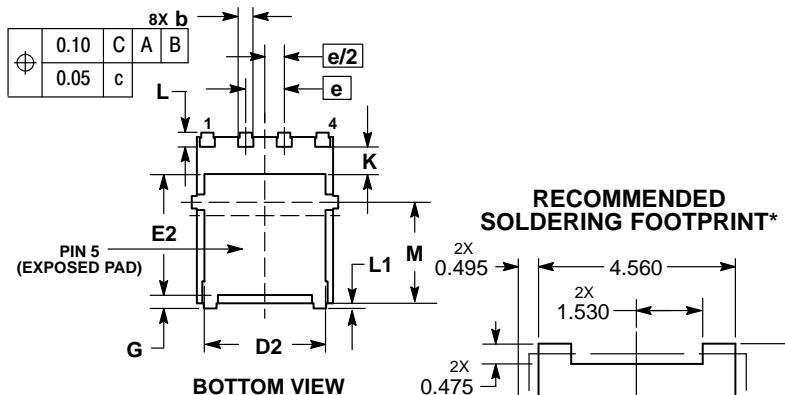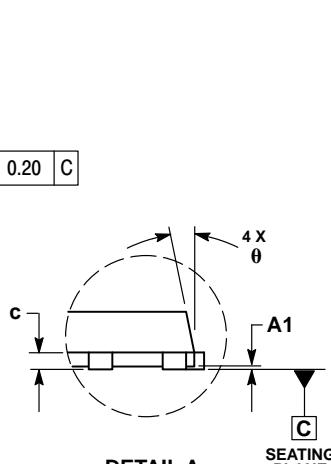

STYLE 1:  
PIN 1. SOURCE  
2. SOURCE  
3. SOURCE  
4. GATE  
5. DRAIN

STYLE 2:  
PIN 1. ANODE  
2. ANODE  
3. ANODE  
4. NO CONNECT  
5. CATHODE

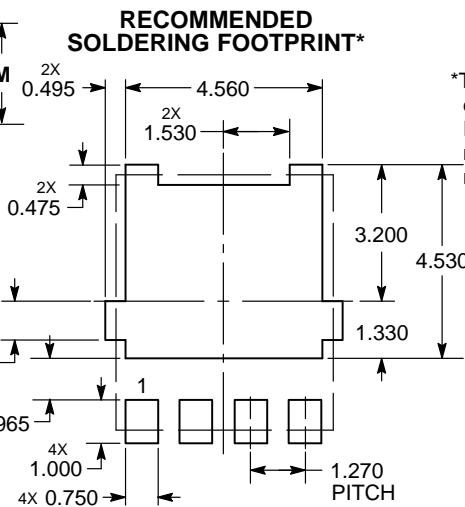

DIMENSIONS: MILLIMETERS

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

### GENERIC MARKING DIAGRAM\*



XXXXXX = Specific Device Code

A = Assembly Location

Y = Year

W = Work Week

ZZ = Lot Traceability

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON14036D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	DFN5 5x6, 1.27P (SO-8FL)	PAGE 1 OF 1

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

**onsemi, ONSEMI, and other names, marks, and brands** are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**onsemi** Website: [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

#### North American Technical Support:

Voice Mail: 1 800-282-9855 Toll Free USA/Canada  
Phone: 011 421 33 790 2910

#### Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910  
For additional information, please contact your local Sales Representative

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[onsemi](#):

[NTMFS4C35NT1G](#) [NTMFS4C35NT3G](#)