# MOSFET – Power, Single N-Channel, SO-8 FL 30 V, 127 A

#### **Features**

- Low R<sub>DS(on)</sub> to Minimize Conduction Losses
- Low Capacitance to Minimize Driver Losses
- Optimized Gate Charge to Minimize Switching Losses
- NVMFS4C05NWF Wettable Flanks Option for Enhanced Optical Inspection
- AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise stated)

Parameter			Symbol	Value	Unit
Drain-to-Source Voltage			$V_{DSS}$	30	V
Gate-to-Source Volta	Gate-to-Source Voltage			±20	V
Continuous Drain Current R <sub>BJA</sub>		T <sub>A</sub> = 25°C		27.2	Α
(Notes 1, 2 and 4)		T <sub>A</sub> = 80°C	l <sub>D</sub>	21.6	
Power Dissipation $R_{\theta JA}$ (Notes 1, 2 and 4)		T <sub>A</sub> = 25°C	P <sub>D</sub>	3.61	W
Continuous Drain Current R <sub>0</sub> JC (Notes 1, 2, 3 and 4)	Steady State	T <sub>C</sub> = 25°C		127	
Continuous Drain Current R <sub>0</sub> JC (Notes 1, 2, 3 and 4)		T <sub>C</sub> = 80°C	l <sub>D</sub>	101	А
Power Dissipation $R_{\theta JC}$ (Notes 1, 2, 3 and 4)		T <sub>C</sub> = 25°C	P <sub>D</sub>	79	W
Pulsed Drain Current	$T_A = 25^{\circ}C, t_p = 10 \ \mu s$		I <sub>DM</sub>	174	Α
Operating Junction and Storage Temperature			T <sub>J</sub> , T <sub>STG</sub>	-55 to +175	°C
Source Current (Body Diode)			I <sub>S</sub>	72	Α
Single Pulse Drain-to-Source Avalanche Energy ( $T_J = 25$ °C, $I_L = 29 A_{pk}$ , $L = 0.1$ mH)			E <sub>AS</sub>	42	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			$T_L$	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


- The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- 2. Surface-mounted on FR4 board using 650 mm<sup>2</sup>, 2 oz Cu pad.
- Assumes heat-sink sufficiently large to maintain constant case temperature independent of device power.
- 4. Continuous DC current rating. Maximum current for pulses as long as one second is higher but dependent on pulse duration and duty cycle.



#### ON Semiconductor®


#### www.onsemi.com

V <sub>(BR)DSS</sub>	R <sub>DS(ON)</sub> MAX	I <sub>D</sub> MAX
30 V	2.8 m $\Omega$ @ 10 V	127 A
30 V	4.0 mΩ @ 4.5 V	127 A





# SO-8 FLAT LEAD CASE 488AA STYLE 1



**MARKING** 

4C05N = Specific Device Code for NVMFS4C05N

4C05WF= Specific Device Code of

NVMFS4C05NWF = Assembly Location

A = Assembly Locat
Y = Year
W = Work Week
ZZ = Lot Traceability

#### ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>
NVMFS4C05NT1G	SO-8 FL (Pb-Free)	1500 / Tape & Reel
NVMFS4C05NT3G	SO-8 FL (Pb-Free)	5000 / Tape & Reel
NVMFS4C05NWFT1G	SO-8 FL (Pb-Free)	1500 / Tape & Reel
NVMFS4C05NWFT3G	SO-8 FL (Pb-Free)	5000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit	
Junction-to-Case (Drain)	$R_{ heta JC}$	1.9	°C ///	
Junction-to-Ambient - Steady State (Note 5)	$R_{ heta JA}$	41.6	°C/W	

<sup>5.</sup> Surface-mounted on FR4 board using 650 mm<sup>2</sup>, 2 oz Cu pad.

### **ELECTRICAL CHARACTERISTICS** ( $T_J = 25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit	
OFF CHARACTERISTICS						•		
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> = 0 V, I <sub>D</sub> = 250 μA		30			V	
Drain-to-Source Breakdown Voltage Temperature Coefficient	V <sub>(BR)DSS</sub> /				12		mV/°C	
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 24 V	$T_{J} = 25^{\circ}C$ $T_{J} = 125^{\circ}C$			1.0	μΑ	
Gate-to-Source Leakage Current	I <sub>GSS</sub>	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 20 \text{ V}$				±100	nA	
ON CHARACTERISTICS (Note 6)						1		
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}, I_{D}$	= 250 μA	1.3		2.2	V	
Threshold Temperature Coefficient	V <sub>GS(TH)</sub> /T <sub>J</sub>				-5.1		mV/°C	
Drain-to-Source On Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V	I <sub>D</sub> = 30 A		2.3	2.8	1, 3	
	(,	V <sub>GS</sub> = 4.5 V	I <sub>D</sub> = 30 A		3.3	4.0	mΩ	
Forward Transconductance	9FS	V <sub>DS</sub> = 1.5 V, I	<sub>D</sub> = 15 A		68		S	
Gate Resistance	R <sub>G</sub>	T <sub>A</sub> = 25°	C	0.3	1.0	2.0	Ω	
CHARGES AND CAPACITANCES	<b>I</b>			<u>I</u>				
Input Capacitance	C <sub>ISS</sub>				1972			
Output Capacitance	C <sub>OSS</sub>	V <sub>GS</sub> = 0 V, f = 1 MHz, V <sub>DS</sub> = 15 V			1215		pF	
Reverse Transfer Capacitance	C <sub>RSS</sub>				59			
Capacitance Ratio	C <sub>RSS</sub> /C <sub>ISS</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 15 V, f = 1 MHz			0.030			
Total Gate Charge	Q <sub>G(TOT)</sub>				14		<u> </u>	
Threshold Gate Charge	Q <sub>G(TH)</sub>				3.3		1	
Gate-to-Source Charge	Q <sub>GS</sub>	$V_{GS} = 4.5 \text{ V}, V_{DS} = 15 \text{ V}; I_D = 30 \text{ A}$			6.0		nC	
Gate-to-Drain Charge	$Q_{GD}$				5.0		1	
Gate Plateau Voltage	$V_{GP}$				3.1		V	
Total Gate Charge	Q <sub>G(TOT)</sub>	V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 15 V; I <sub>D</sub> = 30 A			30		nC	
SWITCHING CHARACTERISTICS (Note 7	')			•			•	
Turn-On Delay Time	t <sub>d(ON)</sub>				11		ne	
Rise Time	t <sub>r</sub>	$V_{GS} = 4.5 \text{ V}, V_{D}$	<sub>S</sub> = 15 V,		32			
Turn-Off Delay Time	t <sub>d(OFF)</sub>	$I_D = 15 \text{ A}, R_G = 3.0 \Omega$			21		ns -	
Fall Time	t <sub>f</sub>				7.0			
Turn-On Delay Time	t <sub>d(ON)</sub>	$V_{GS}$ = 10 V, $V_{DS}$ = 15 V, $I_{D}$ = 15 A, $R_{G}$ = 3.0 $\Omega$			8.0			
Rise Time	t <sub>r</sub>				26		ns	
Turn-Off Delay Time	t <sub>d(OFF)</sub>				26			
Fall Time	t <sub>f</sub>				5.0			
DRAIN-SOURCE DIODE CHARACTERIS	TICS		_	_	_	_		
Forward Diode Voltage	$V_{SD}$	$V_{GS} = 0 V$ ,	T <sub>J</sub> = 25°C		0.77	1.1	V	
		$I_{S} = 10 \text{ A}$ $T_{J} = 125^{\circ}\text{C}$			0.62			
Reverse Recovery Time	t <sub>RR</sub>	$V_{GS} = 0 \text{ V, } dI_{S}/dt = 100 \text{ A}/\mu\text{s,}$ $I_{S} = 30 \text{ A}$			40.2			
Charge Time	t <sub>a</sub>				20.3		ns	
Discharge Time	t <sub>b</sub>				19.9			
Reverse Recovery Charge	Q <sub>RR</sub>				30.2		nC	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 6. Pulse Test: pulse width  $\leq$  300  $\mu$ s, duty cycle  $\leq$  2%.

<sup>7.</sup> Switching characteristics are independent of operating junction temperatures.

#### **TYPICAL CHARACTERISTICS**




Figure 1. On-Region Characteristics




Figure 2. Transfer Characteristics




Figure 3. On-Resistance vs. V<sub>GS</sub>




Figure 4. On-Resistance vs. Drain Current and Gate Voltage




Figure 5. On–Resistance Variation with Temperature




Figure 6. Drain-to-Source Leakage Current vs. Voltage

#### **TYPICAL CHARACTERISTICS**




Figure 7. Capacitance Variation




Figure 8. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge




Figure 9. Resistive Switching Time Variation vs. Gate Resistance




Figure 10. Diode Forward Voltage vs. Current

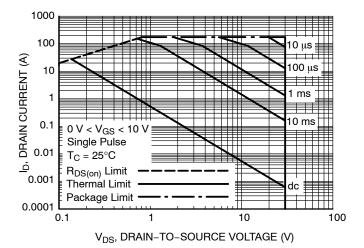


Figure 11. Maximum Rated Forward Biased Safe Operating Area

## **TYPICAL CHARACTERISTICS**

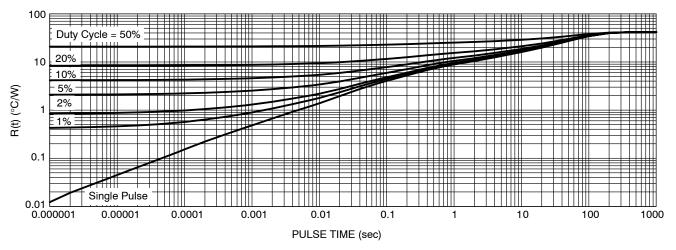


Figure 12. Thermal Response

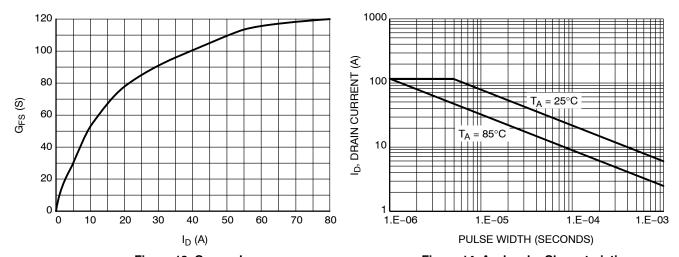


Figure 13.  $G_{FS}$  vs.  $I_D$ 

Figure 14. Avalanche Characteristics



0.10

0.10

SIDE VIEW

DFN5 5x6, 1.27P (SO-8FL) CASE 488AA ISSUE N

**DATE 25 JUN 2018** 

#### NOTES:

BURRS

- DIMENSIONING AND TOLERANCING PER
- ASME Y14.5M, 1994.
  CONTROLLING DIMENSION: MILLIMETER.
  DIMENSION D1 AND E1 DO NOT INCLUDE MOLD FLASH PROTRUSIONS OR GATE

	MILLIMETERS			
DIM	MIN	NOM	MAX	
Α	0.90	1.00	1.10	
A1	0.00		0.05	
b	0.33	0.41	0.51	
С	0.23	0.28	0.33	
D	5.00	5.15	5.30	
D1	4.70	4.90	5.10	
D2	3.80	4.00	4.20	
E	6.00	6.15	6.30	
E1	5.70	5.90	6.10	
E2	3.45	3.65	3.85	
е	1.27 BSC			
G	0.51	0.575	0.71	
K	1.20	1.35	1.50	
L	0.51	0.575	0.71	
L1	0.125 REF			
M	3.00	3.40	3.80	
A	0 0		12 °	

#### **GENERIC** MARKING DIAGRAM\*



XXXXXX = Specific Device Code

= Assembly Location Α

Υ = Year W = Work Week ZZ = Lot Traceability

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present. Some products may not follow the Generic Marking.





**DETAIL A** 

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON14036D	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	DFN5 5x6, 1.27P (SO-8FL)		PAGE 1 OF 1	

ON Semiconductor and unare trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ÓN Semiconductor does not convey any license under its patent rights nor the rights of others

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## onsemi:

NVMFS4C05NT1G NVMFS4C05NWFT1G NVMFS4C05NT3G NVMFS4C05NWFT3G